

Capacity
0.4 – 49.9
MMBtu/h



Oil, Gas and Dual Fuel Monoblock Burners



Low Emission Combustion Technology

Table of contents


<u>Oilon Burners</u>	8		
<u>Choosing the burner</u>	9		
<u>NOx emissions</u>	10		
<u>Oilon WiseDrive - High efficiency with advanced automation</u>	11		
<u>Oilon Selection Tool</u>	13		
<u>Type labeling</u>	14		
<u>WDx00i - Inbuilt Control System</u>	15		
WiseDrive WDx00	16		
Cost savings using O2 control and variable speed drive (VSD)	18		
GP-50...90 M	20		
Technical Data	20		
Dimensions	20		
Working Diagram	21		
GP-140...280 M, GP140...280 M	22		
Technical Data	22		
Dimensions	22		
Working Diagram	23		
Scope of Delivery GP-50...280	24		
Dual Fuel Burners			
Gas/Light Fuel Oil	25		
GKP-50/90 MH	26		
Technical Data	26		
Dimensions	26		
Working Diagram	27		
GKP-140 MH...280 MH	28		
Technical Data	28		
Dimensions	28		
Working Diagrams	29		
Scope of Delivery GKP-50...280	30		
Light Fuel Oil Burners	31		
KP-140...280 M	32		
Technical Data	32		
Dimensions	32		
Working Diagram	33		
Scope of Delivery KP-140...280	34		
PI Diagrams	35		
Combustion head and masonry dimensions	37		
Accessories WDx00i	38		
Packing	39		
		WDx00 - Separate Control Cabinet	41
		WiseDrive WDx00	42
		Cost savings using O2 control and variable speed drive (VSD)	44
		FGR - Flue Gas Recirculation	45
		GP-140...280 M, GP-140...280 M LN80	48
		Technical Data	48
		Dimensions	48
		Working Diagram	49
		GP-350/450 M, GP-320...450 M LN80	50
		Technical Data	50
		Dimensions	50
		Working Diagram	51
		GP-600 M...700 M-III	52
		Technical Data	52
		Dimensions	52
		Working Diagram	53
		GP-600 M/GP-700 M-III LN60, GP-600...700 M-III LN80	54
		Technical Data	54
		Dimensions	54
		Working Diagram	55
		GP-1000/1200 M, GP-1000 M LN80	56
		Technical Data	56
		Dimensions	56
		Working Diagram	57
		Scope of Delivery GP-140...1200	58
		Dual Fuel Burners	
		Gas/Light Fuel Oil	59
		GKP-140 M...280 M, GKP-140/250 M LN80	60
		Technical Data	60
		Dimensions	60
		Working Diagram	61
		Working Diagram	62
		GKP-350/450 M, GKP-320/450 M LN80	64
		Technical Data	64
		Dimensions	64
		Working Diagram	65
		GKP-600 M...700 M-III	66
		Technical Data	66
		Dimensions	66
		Working Diagram	67
		GKP-600 M LN80/ GKP-700 M-III LN80	68

Technical Data	68
Dimensions	68
Working Diagram	69
GKP-1000/1200 M	70
Technical Data	70
Dimensions	70
Working Diagram	71
Scope of Delivery GKP-140...1200	72
Light Fuel Oil Burners	73
KP-350/450 M	74
Technical Data	74
Dimensions	74
Working Diagram	75
Scope of Delivery KP-350...450	76
PI Diagrams	77
Combustion head and masonry dimensions	80
Accessories	83
Accessories WDx00	84
Packing	86
<u>General for all burners</u>	<u>87</u>
<u>Flame dimensions for combustion head</u>	<u>88</u>
<u>Gas valves</u>	<u>89</u>
<u>Accessories</u>	<u>89</u>
<u>Example</u>	<u>92</u>
<u>Oilon customer service and webshop</u>	<u>93</u>
<u>Modern training facilities</u>	<u>94</u>
<u>Our Sales and Service Network</u>	<u>95</u>


WDx00i Burners - Inbuilt Control System



Gas Burners
0.4 - 12.49 MMBtu/h



Dual Fuel Burners
Gas/Light Fuel Oil
0.4 - 12.49 MMBtu/h




Light Fuel Oil Burners
14.6 - 91.7 MMBtu/h


WDx00 Burners - Separate Control Cabinet



Gas Burners
1.5 - 49.9 MMBtu/h



Dual Fuel Burners
Gas/Light Fuel Oil
2.1 - 49.9 MMBtu/h



Light Fuel Oil Burners
6.0 - 20.6 MMBtu/h





For over half a century, we have developed and produced environmentally friendly and energy efficient combustion solutions for our customers.

During this time, the customer has always been at the center of our business. Perhaps this is the reason why we are known for our company slogan "Oilon-the warm way".



We are a family-owned technology company, founded in 1961. We are known for our combustion systems, industrial heat pumps and cooling units, ground source heat pumps and solar heat collectors.

We are a global company, with offices, production facilities and distributors around the world. Our headquarters is located in Lahti, Finland.



A modern Research and Development Centre, located in Lahti Finland, is equipped with the latest technology for running diverse combustion tests and collecting data. In addition to testing, we use computer modelling of combustion processes, using computational fluid dynamics (CFD).

We are especially committed to reducing nitrogen oxides (NO_x) and particulate emissions.

oilon

oilon[®] SERVICE
SERVICE - SUPPORT - SPAREPARTS

customerservice@oilon.com

Contact our customer service: +1 229 236 6546



Digital combustion control – optimal combustion efficiency

High quality components – Long lifecycle

Excellent price / quality ratio

Service friendly design – easy access to all components

Experience in special fuels

Global service network

Fully tested before delivery

Reliable and proven technology

Oilon Burners



Oilon gas, oil and dual fuel burners are fully automatic, safe, and reliable. The burners are equipped with the latest digital technology.

Design

Oilon burners are designed for easy operation and maintenance without forgetting environmental friendliness and safety.

Applications

Oilon burners are suitable for various applications, such as hot water boilers, steam boilers, air heaters and different process applications.

Fuels

Oilon burners are suitable for various liquid and gaseous fuels such as light fuel oil, natural gas and LPG. Burners using other fuels are available on request.

Connectivity

Digital combustion management enables communication with external systems. Remote monitoring and diagnostics optimize operational efficiency.

Standards

Gas burners comply with the ANSI /UL 295

Oil burners comply with the ANSI/UL 296

Dual fuel burners comply with the ANSI/UL 2096

Atomizing-type oil burners comply with the standard B140.2.1-10

Gas-fired burners comply with standard CSA/CGA 3.4-1973 and dual fuel burners with all of these. Burners are UL type tested.

Oilon burner is your choice!



Choosing the burner


A. Procedure

- Establish relevant boiler and application information
 - boiler capacity and efficiency, or required burner capacity
 - furnace back-pressure
 - fuel/fuels to be used
 - burner fuel inlet pressure
 - burner capacity regulation method
- Calculate the burner capacity. Burner capacity = boiler capacity / efficiency
 Example: boiler capacity of 663 hp (6,500 kW), efficiency of 90 % → burner capacity = 22.176 MBtu/h (6,500 kW) / 0.9 = 24.636 MBtu/h (7,220 kW).
- Gas burners: Required gas flow [ft³/h] = (burner capacity [MBtu])/gas's calorific value [Btu/ft³]. Example: required burner capacity = 24.636 MBtu/h → required gas flow = 24.636 MBtu/h x 1,030 Btu/ft³ = 23.918 ft³/h, where 1,030 Btu/ft³ is the calorific value of natural gas.
 Oil burners: Calculate the required oil flow [lb/h]. Required oil flow [lb/h] = (burner capacity [MBtu])/ the oil's calorific value [Btu/lb]. Example: required burner capacity = 24.636 MBtu/h → required oil flow = (24.636 MBtu/h x 140,000 Btu/gal = 176 gal/h, where 140,000 Btu/gal is the calorific value of light oil.
- See relevant brochure for burner capacity/back pressure graphs: The graphs indicate the burner operating range. For example, the boiler back pressure with a burner capacity of 24.636 MBtu/h is 7.2 "WC. Looking at the adjoining graph, plot your burner capacity along the horizontal axis. On the vertical axis plot your boiler back-pressure. Where the two lines meet, defines the required burner type. The optimum burner is best chosen by ensuring that the plotted operating point is as close as possible to the right hand edge of the corresponding operating envelope. Different fuels and capacity regulation methods require separate graphs. The fuel calorific value is stated on the graphs.
- Gas and dual fuel burner valve selection: Choose a large enough valve, using the gas valve selection table. Note that the values in the selection table apply when the furnace back pressure is 0 "WC. Therefore, you must subtract the furnace back pressure from the actual gas inlet pressure and choose the valve on the basis of the value thus obtained. The ratings shown in the table apply to natural gas.
 For example, when the gas inlet pressure of the burner is 40 "WC, boiler back pressure is 7 "WC, and required burner capacity is 24.636 MBtu/h, the effective pressure is 40 "WC - 7 "WC = 33 "WC. For the GP-700 M burner, for example, you should choose a valve allowing a minimum burner capacity of 24.636 MBtu/h with 33 "WC gas inlet pressure → in this case, valve Ansi 4".
- Check that the outer dimensions of the burner, especially those of the combustion head, are suitable for the application; the length of the combustion head should be such that, when mounted, the combustion head is even with the furnace wall or about 0.4 to 0.8 inches inside the furnace (see 'Masonry' figure).
- Check the flame dimensions in the flame dimension table. Please note that the flame must not come in to contact the walls of the furnace.
- Accessory requirements must also be taken into consideration: gas pressure regulator, oil pumping unit, boiler thermostats/pressostats.

B. Equations and rules of thumb

- Burner capacity = boiler capacity / 0.9 (when boiler efficiency is 90 %)
- Steam boilers: 1 boiler horsepower = 34.5 lb/h steam
- Light oil: 1 lb/h ≈ 20.0 MBtu/h burner capacity with calorific value 19,960 Btu/gal
 1 lb/h = 973,000 btu/h burner capacity with calorific value 139,000 Btu/gal
- Natural gas: 1 ft³/h ≈ 1.030 MBtu/h burner capacity with calorific value 1,030 Btu/ft³
- The amount of combustion air:
 - Gas burners: required amount of combustion air for each 34 MBtu/h of burner capacity is 13.5 ft³/h.
 1 ft³ of natural gas requires 11.3 ft³ of combustion air
 - Oil burners: required amount of combustion air for each gallon of oil burned [lb/h] is 49 ft³/h.
 1 gallon of light fuel oil requires 14.7 ft³ of combustion air.

An example of burner selection

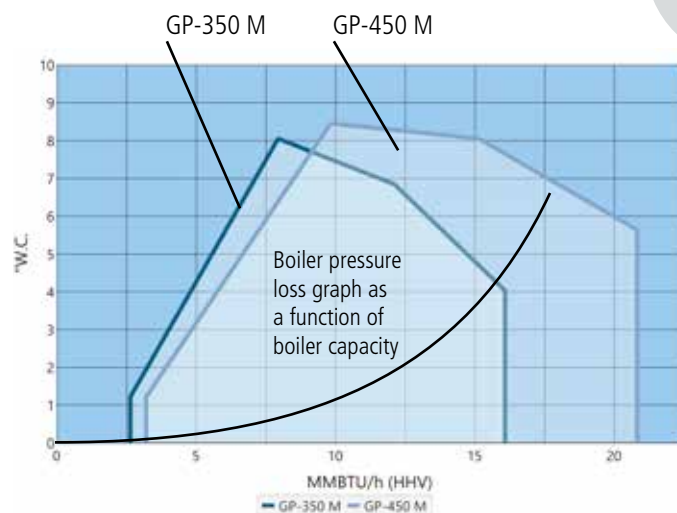

The max. capacity of a hot water boiler is 14,000 MBtu/h, efficiency 0.9, and the corresponding burner capacity 14,000 MBtu/h / 0.9 = 15,555 MBtu/h. The graph indicates that a suitable gas burner for this capacity is the GP-450 M, as the pressure loss value for the boiler is located inside the area for the GP-450 M burner on the capacity/back pressure graph. The GP-350 M can also be used for this application, provided that the full boiler capacity is not required. Remember to take efficiency into account when relating the boiler pressure loss information to the burner capacity/back pressure graph.

NOx emissions

Nitrogen oxides (NOx) are compounds of nitrogen and oxygen, the most important of which are NO and NO2. Small amounts of nitrogen oxides also occur in nature, but the majority of them originate from human actions, mainly from logistics and energy production.


Nitrogen oxides form during all combustion processes, when the nitrogen present in the combustion air and/or fuel and the oxygen present in the combustion air, react at high temperatures.

Nitrogen oxides are harmful to humans and the environment in many ways. They are toxic and harmful to the respiratory system. Nitrogen oxides cause acidification and eutrophication of the environment, form ground-level ozone and harmful particulate emissions.

Increasingly stringent emission limits are being imposed all over the world to mitigate the adverse effects of nitrogen oxide emissions. The reduction of nitrogen oxides is the key priority in lowering emissions from traffic and energy production.

We are especially committed on reducing nitrous oxide (NOx) and particulate emissions. One of our most important goals when developing our products is to lower emission levels.


Effect of combustion head on NOx emissions, natural gas

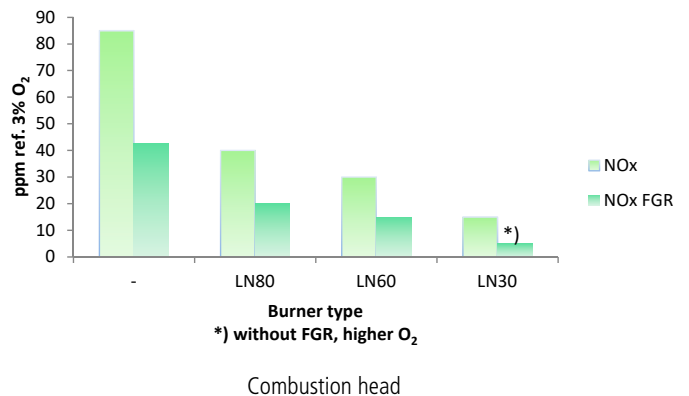

Low NOx emissions are achieved by innovative gas and air distribution and staging in the combustion head.

NOx emissions are also reduced with the use of internal/external FGR in order to reduce flame peak temperatures and combustion reaction speed. Emission values depend on the furnace geometry, the furnace load and the temperature of the boiler medium. Low NOx levels are mainly achieved on standard 2 or 3-pass boilers.

NO_x EMISSION DIAGRAM

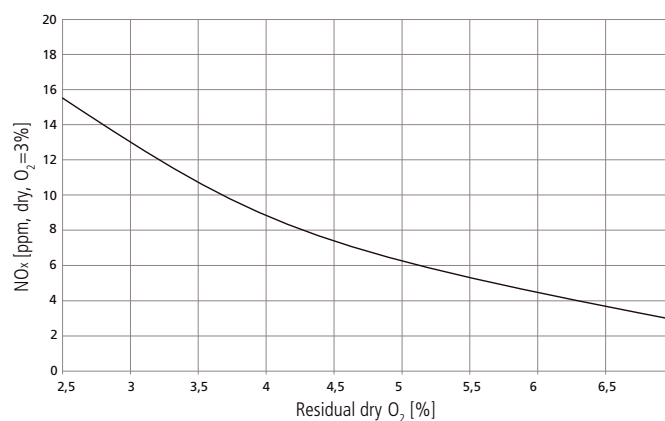

NO_x emissions and required residual O₂ will vary depending on furnace geometry and conditions

Oilon WiseDrive - High efficiency with advanced automation

Oilon WiseDrive is an electronic fuel/air ratio control system. In the WiseDrive system separate servomotors are installed for combustion air dampers, fuel regulator(s) and optionally for combustion head control to control air flow in the combustion head. The ratio between fuel, combustion air and combustion head air flow is adjusted electronically. The WiseDrive system also takes care of burner control and safety functions.



High efficiency

Electronic fuel/air ratio control improves combustion efficiency and lowers emissions. The greatest benefits are achieved in dual fuel burners where the combustion of both the main and reserve fuels can be adjusted optimally and the O₂ control is in use. Significant energy savings can also be achieved by using variable speed drive (VSD) in the combustion air fan.

A versatile system

Oilon WiseDrive system can be connected to external systems via fieldbus connection. Data regarding burner status and combustion process can be read remotely. Also remote control (start, stop, reset) and settings (capacity controller, fuel selection) can be performed via fieldbus.

WiseDrive includes control sequences, fuel/air ratio and capacity control as well as leak testing of gas valves and much more in a single package.

WiseDrive (WD), an electronic regulator for controlling the fuel/air ratio – an energy-efficient and environmentally friendly solution

Electronic fuel/air ratio control of the burner brings the benefits of lower flue gas emissions, decreased consumption of energy and improved technical characteristics of the burner, such as more accurate regulation.

CONTROL SYSTEMS	WD100	WD200
Operation principle	Electronic fuel/air	Electronic fuel/air
Control unit	Siemens LMV 51	Siemens LMV 52
Available for fuels	LFO (KP) GAS (GP) GAS/LFO (GKP)	LFO (KP) GAS (GP) GAS/LFO (GKP)
O ₂ control	Not available	Available*
VSD control	Not available	Standard
Control panel interface	Text display	Text display
External communication	Hardwired + Modbus (Standard) Profibus (Optional)	Hardwired + Modbus (Standard) Profibus (Optional)
Capacity control	Built in LMV51 4...20 mA output signal	Built in LMV52 4...20 mA output signal
FGR	Not available	Available**

*) Not available with inbuilt control system (50/90 burner series)

***) Not available with inbuilt control system

BURNER CONTROL SYSTEMS	Inbuilt control system		Separate Control Panel		
	WD100	WD200	WD100	WD200	
GP-50 M / GP-90 M	x	x	-	-	
GP-140 M...GP-280 M	x	x	x	x	
GP-350 M...GP-1200 M	-	-	x	x	
GP-140 M LN80...GP-1000 M LN80	-	-	x	x	
GP-600 M LN60 / GP-700 M-III LN60	-	-	x	x	*
GP-130 M LN30 / GP-250 M LN30	-	-	-	-	
GP-320 M LN30 / GP-350 M LN30	-	-	-	-	**
GKP-50 MH / GKP- 90 MH	x	x	-	-	
GKP-140 MH...GKP- 280 MH	x	x	-	-	
GKP-140 M...GKP-1200 M	-	-	x	x	
GKP-140 M LN80...GKP-700 M-III LN80	-	-	x	x	
KP-50 H / KP-90 H	-	-	-	-	
KP-140 M...KP-280 M	x	-	-	-	
KP-350 M / KP-450 M	-	-	x	x	***

*) No stock model, longer delivery time

**) Coming to the market

***) Please, ask these model from Oilon Oy



Oilon Selection Tool

Oilon Selection Tool simplifies choosing the right product and optional accessories from our extensive range of products.

You can make quick selections and advanced system calculations with the user friendly software, available in several languages. Oilon Selection Tool allows you to access an extensive range of product information, calculation results, and enables you to form detailed technical specifications.

Oilon Selection Tool is continuously updated as new products, features, functionalities and improvements will be added. Automatic software updates ensure that you always have access to the latest features and product information.

Oilon Selection Tool can be downloaded from www.oilon.com and can be installed locally to your Windows, Mac or Linux computer.

Type labeling

GKP-700 M-II WD200 LN80 C2



Combustion head length (additional code):

-
- C1
- C2

NOx-emissions (additional code):

- LN80 = 40 ppm (80mg/kWh)
- LN60 = 30 ppm (60mg/kWh)
- LN30 = 15 ppm (30mg/kWh)

Control system (additional code):

-
- WDx00 = Siemens LMV5
- WDx00i = Integrated Siemens LMV5

Burner capacity size categorization:

-
- I
- II
- III

Method of control:

- H = Two-stage
- M = Modulating
- MH = Modulating gas, two-stage oil

Burner frame size categorization:

- 50...1200

Fuel:


- GP = Gas
- GKP = Gas, light fuel oil
- KP = Light fuel oil
- RP = Heavy fuel oil
- GRP = Gas, heavy fuel oil



**WDx00i - Inbuilt
Control System**

WiseDrive WDx00

Example of Oilon WiseDrive WD100 Electronic fuel/air ratio control system

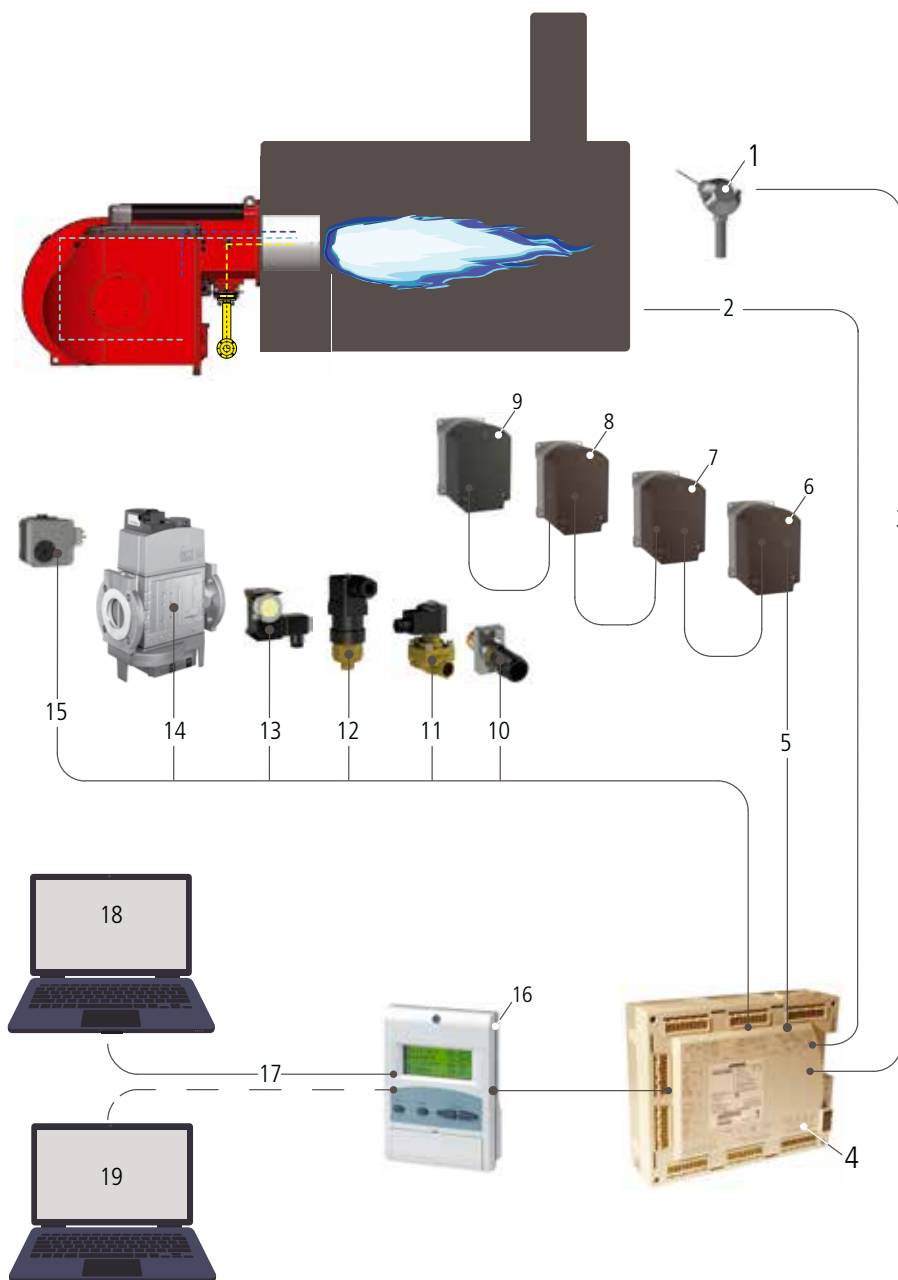


Examples of WiseDrive's functions:

- Control sequences and safety functions
- Fuel/air ratio control
- Combustion head control (option)
- Load control with inbuilt PID controller, control also by an external 4...20 mA signal
- Can be connected with external plant automation via bus. Modbus RTU as standard.
- Different access levels
- Input of parameters via text display operating panel or/and PC (check software and hardware requirements)

1. Boiler pressure/
Boiler temperature
2. Safety devices
3. CAN BUS
4. Control unit
5. CAN BUS - Servomotor
6. Gas damper
7. Air damper
8. Oil regulator
9. Combustion head regulator -
Gas/Oil flame plate positioning
10. Flame detector
11. Oil valves
12. Oil pressure switch
13. Gas pressure switch
14. Gas valves
15. Air pressure switch
16. User interface
17. MOD-BUS
18. Control room
19. Service computer

Example of Oilon WiseDrive WD200 Electronic fuel/air ratio control system with O₂ control and variable speed drive (VSD)

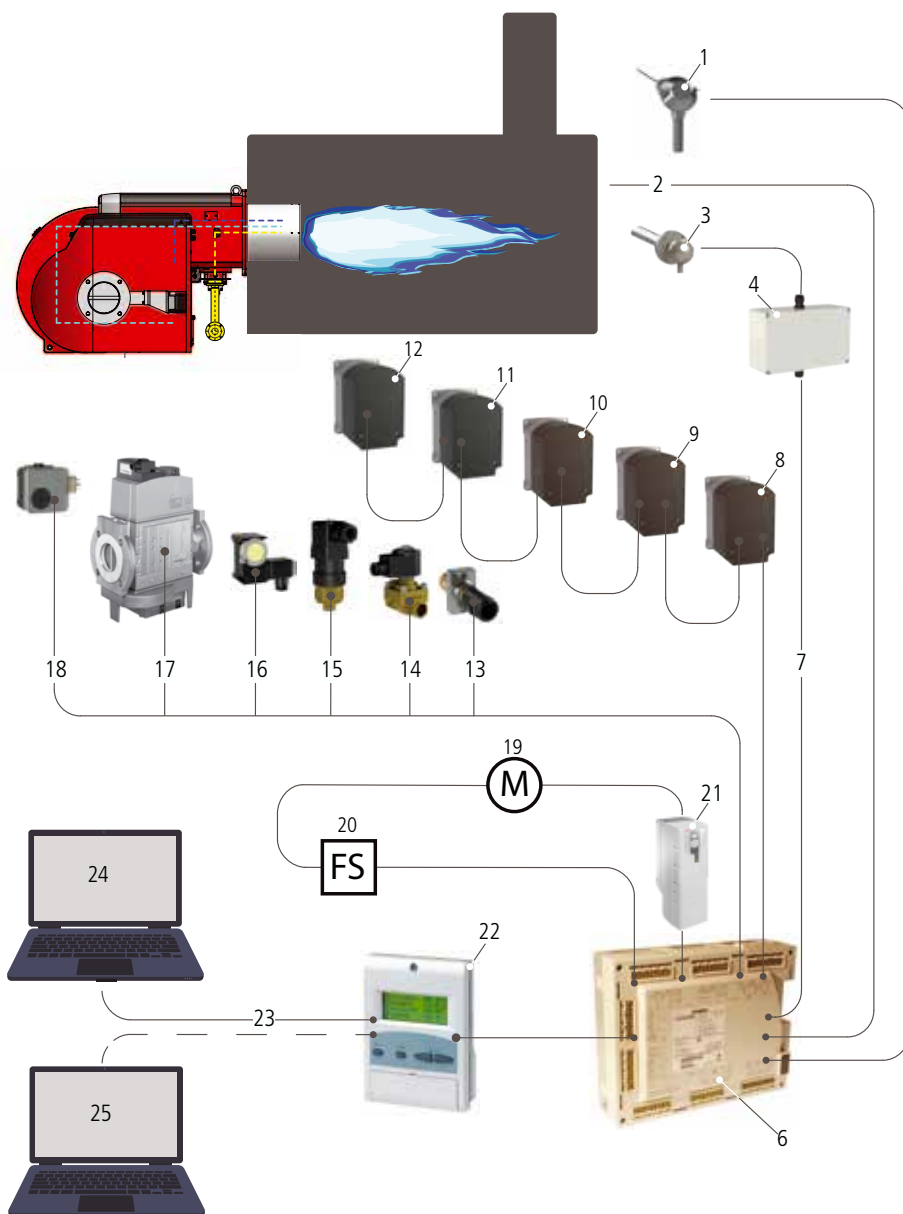

Examples of WiseDrive's functions

- Control sequences and safety functions
- Fuel/air ratio control
- Combustion head control (option)
- Load control with inbuilt PID controller, control also by an external 4...20 mA signal
- Can be connected with external plant automation via bus. Modbus RTU as standard.
- Different access levels
- Input of parameters via text display operating panel or/and PC (check software and hardware requirements)
- Fuel consumption reading (requires flow meter)
- Frequency converter control (requires rotation speed sensor)
- O₂ control (requires O₂ module and O₂ sensor)
- Flue gas temperature reading (requires temperature sensor)
- Combustion air temperature reading (requires temperature sensor)

- | | |
|---|--|
| 1. Boiler temperature | 13. Flame detector |
| 2. Safety devices | 14. Oil valves |
| 3. O ₂ sensor (option) | 15. Oil pressure switch |
| 4. O ₂ module | 16. Gas pressure switch |
| 5. CAN BUS | 17. Gas valves |
| 6. Control unit | 18. Air pressure switch |
| 7. CAN BUS - Servomotor | 19. Motor |
| 8. Gas damper | 20. Speed sensor |
| 9. Oil regulator | 21. Frequency converter for variable speed drive |
| 10. Combustion head regulation/
Gas/Oil flame disc positioning | 22. User interface |
| 11. Air damper | 23. MOD-BUS |
| 12. Flue gas damper, not available with inbuilt control system | 24. Control room |
| | 25. Service computer |

Cost savings using O₂ control and variable speed drive (VSD)


1. Effect of O₂ control on the combustion efficiency

In a traditional burner, the O₂ level of flue gases is usually adjusted to about 4 %. When using WD200, a 2 % O₂ level can be reached. Two percent reduction in O₂ level means 1 % rise in efficiency.


2. VSD in fan motor saves electricity consumption

3. When using O₂ control and VSD in fan motor the annual cost savings are largest.

Motor power consumption in 17 MMbh burner

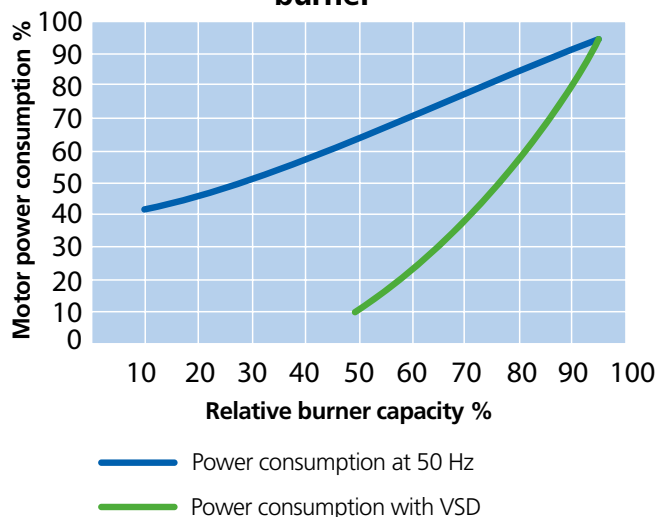

Noise level with VSD and without VSD

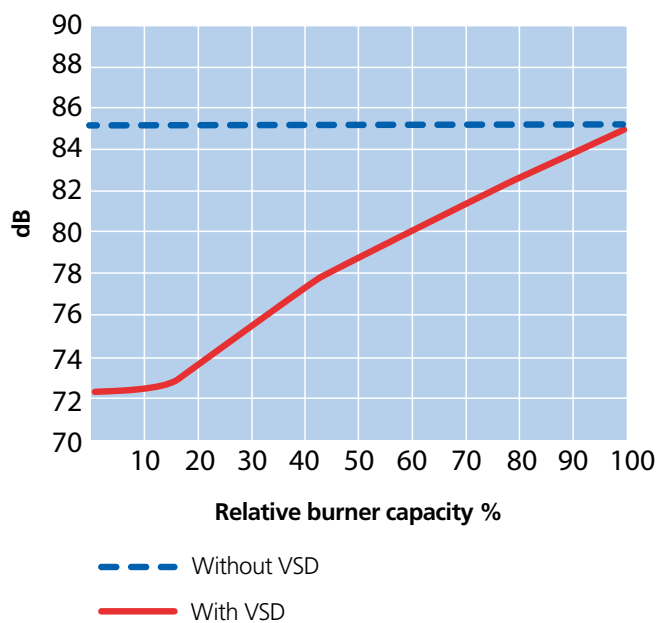

Gas Burners

GP-50...90 M

Technical Data


BURNER	GP-50 M	GP-90 M
Capacity MMBtu/h	0.4 - 3.0	0.9 - 4.99
Burner motor 3~ 208-600 V 60 Hz		
Output hp	1	3
Current A/460 V	1.5	3.8
Speed rpm	3510	3510
Control unit	WDx00i	WDx00i
Weight lb*	88	139

*) Only burner

Ratio level Gas 1:6 (100 – 16,6%)

Note! The weight varies according to delivery contents.


Dimensions

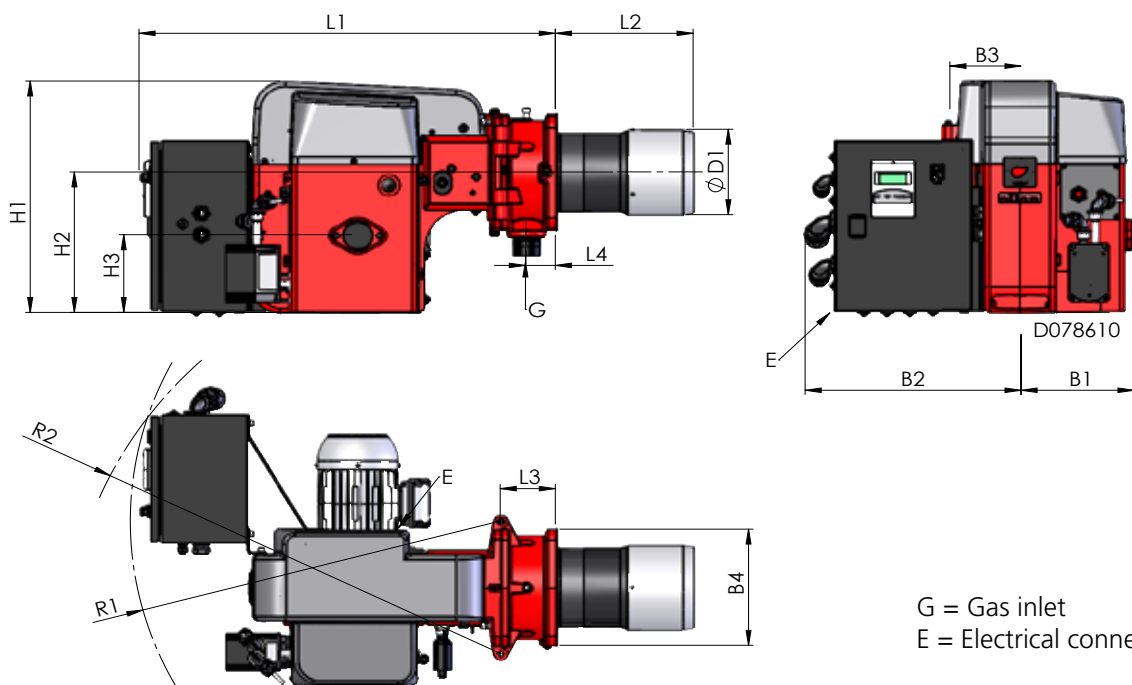

BURNER	L1	L2	L3	L4	H1	H2	H3	B1	B2	B3	B4	ØD1	R1	R2
GP-50 M	35.83	9.45	7.28	3.54	20.08	12.80	6.50	8.27	17.52	5.16	9.45	6.30	29.53	-
GP-90 M	35.83	11.81	4.72	2.56	21.46	12.99	7.17	9.69	18.50	6.10	10.71	7.87	31.89	37.40

Dimensions in inches.

Working Diagram

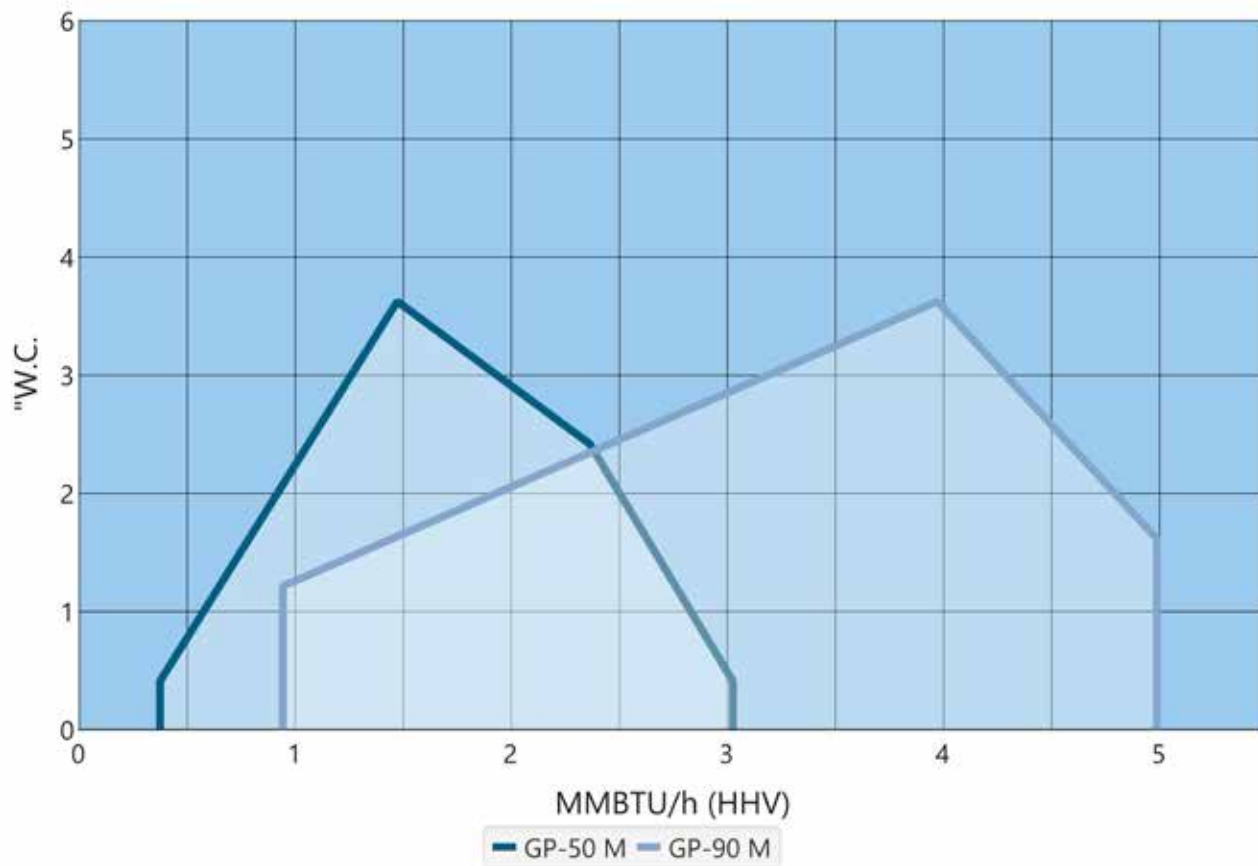

GP-140...280 M, GP140...280 M

Technical Data


BURNER	GP-140 M	GP-150 M	GP-250 M	GP-280 M
Capacity MMBtu/h	1.5 - 8.9	1.7 - 10.2	1.4 - 9.8	1.9 - 12.49
Burner motor 3~ 208-600 V 60 Hz				
Output hp	5.5	7.5	7.5	10
Current A/460 V	6.2	8.9	8.9	11.9
Speed rpm	3510	3510	3510	3510
Control unit	WDx00i	WDx00i	WDx00i	WDx00i
Weight lb*	267	287	353	463

*) Only burner

Ratio level Gas 1:6 (100 – 16,6%)

Note! The weight varies according to delivery contents.

Dimensions

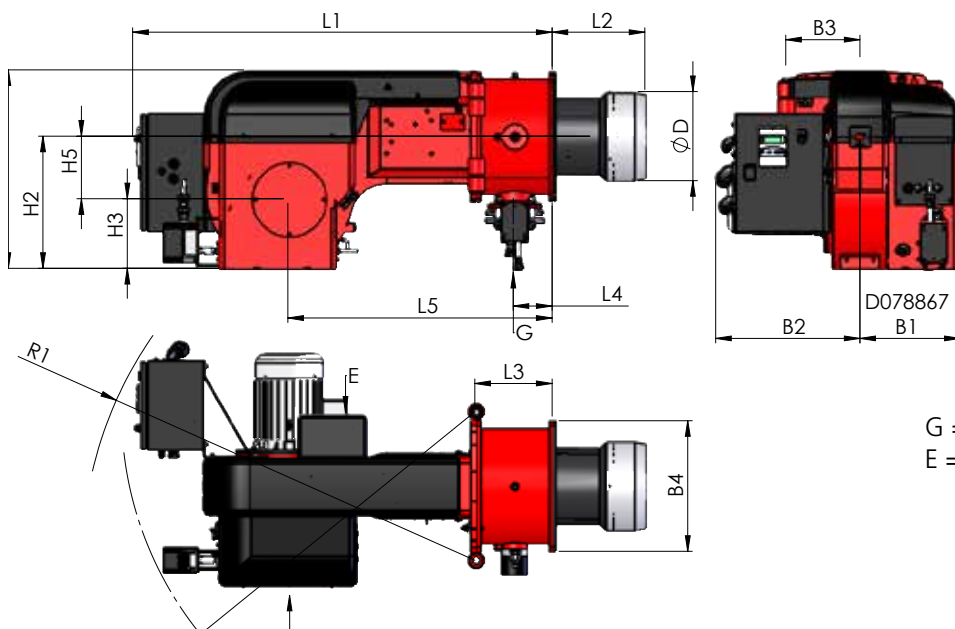


G = Gas inlet
E = Electrical connection

BURNER	L1	L2	L3	L4	L5
GP-140 M	53.74	8.66	10.24	5.08	34.65
GP-150 M	53.74	9.06	10.24	5.08	34.65
GP-250 M	55.71	11.81	10.24	5.12	35.04
GP-280 M	55.71	12.28	10.24	5.12	35.04

BURNER	H1	H2	H3	H5	B1	B2	B3	B4	ØD1	R1	R2
GP-140 M	24.61	15.75	8.27	7.68	12.01	18.31	8.27	14.17	9.45	50.00	45.28
GP-150 M	24.61	15.75	8.27	7.68	12.01	18.90	8.27	14.17	10.63	50.00	45.28
GP-250 M	26.57	17.56	9.25	8.46	13.39	19.29	9.84	17.32	10.63	51.97	47.24
GP-280 M	26.57	17.56	9.25	8.46	13.39	19.29	9.84	17.32	11.81	51.97	47.24

Dimensions in inches.

Working Diagram

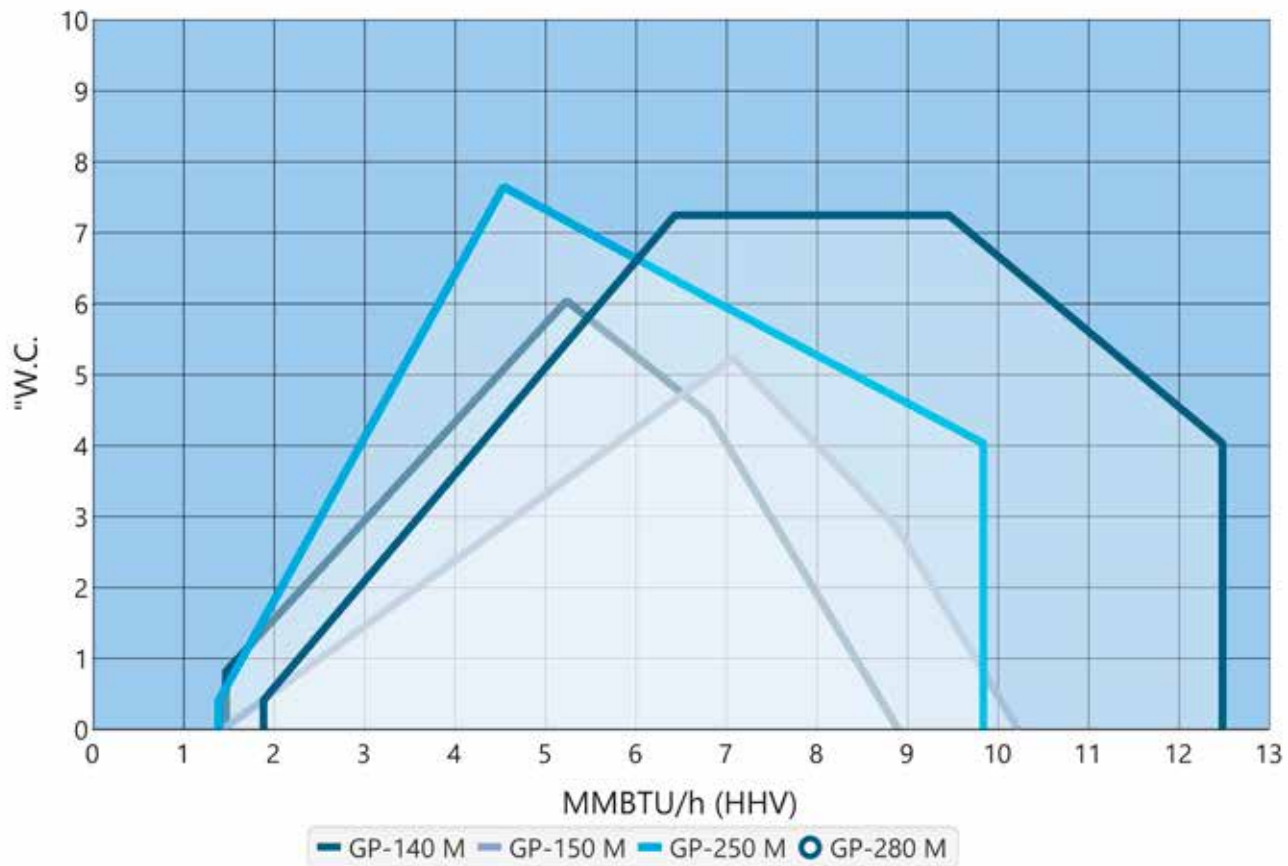

Scope of Delivery GP-50...280

	50/90	140...280
Hinge flange with limit switch	x	x
Burner flange gasket	x	x
WiseDrive (electronic ratio control)	x	x
Ignition transformer	x	x
Ignition cables and electrodes	x	x
Flame sensor	x	x
Inbuilt combustion air fan	x	x
Air damper with servomotor	x	x
Gas damper with servomotor	x	x
Gas nozzle	x	x
Connection for measuring the pressure in gas nozzle	x	x
Gas pressure switch, max.	x	x
Differential air pressure switch	x	x
Single solenoid valve for gas	x	-
Double solenoid valve for gas	o	x
Pressure switch for gas, min.	x	x
Pressure regulation valve for gas	x	x
Ignition gas valve*	o	x
LPG gas nozzle	o	o
Gas pressure gauge	o	o
Turbo combustion head	o	o
Fan motor speed sensor	o	o
Frequency converter	o	o
O ₂ control	-	-
Combustion head optimizer with servomotor	-	-
Pressure gauge for fan pressure	o	o
Manual	x	x

x Standard
o Option

*) Always in LN80 burners

Dual Fuel Burners Gas/Light Fuel Oil

GKP-50/90 MH

Technical Data

BURNER	GKP-50 MH	GKP-90 MH
Capacity, MMBtu/h gal/h	0.4 - 3.0 5.3 - 21.1	0.9 - 4.99 9.3 - 34.8
Burner motor 3~ 208-600 V 60 Hz		
Output hp	1	3
Current A/460 V	1.5	3.8
Speed rpm	3510	3510
Oil hose connection		
- suction	3/8" NPT	1/2" NPT
- return	3/8" NPT	1/2" NPT
Oil pump	AJ4	AJ6
Control unit	WDx00i	WDx00i
Weight lb*	97	143

*) Only burner




LFO: 1 gal/h = 140 MBtu/h

Ratio level Gas 1:6 (100 - 16,6%)

Ratio level LFO 1:2,5 (100 - 40%)

Note! The weight varies according to delivery contents.

Dimensions

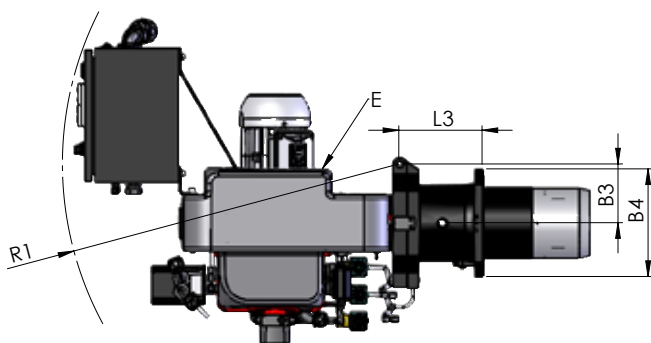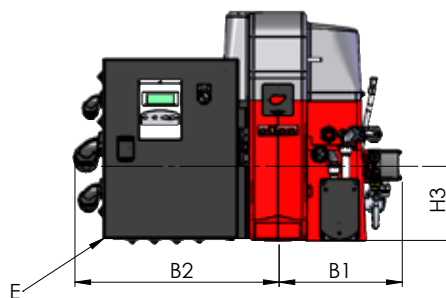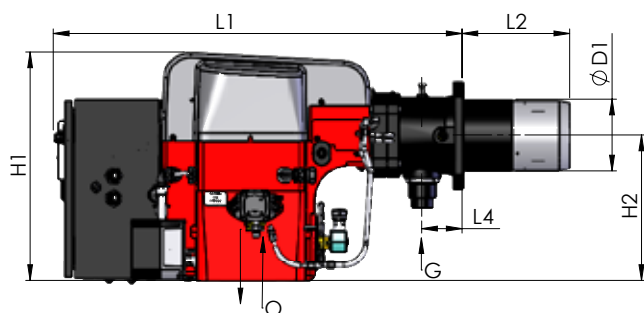


G = Gas inlet
O = Oil inlet/return
E = Electrical connection

BURNER	L1	L2	L3	L4	H1	H2	H3	B1	B2	B3	B4	ØD1	R1	R2
GKP-50 MH	35.83	9.45	7.28	3.54	20.08	12.80	6.50	10.83	17.52	5.16	9.45	6.30	29.53	-
GKP-90 MH	35.83	11.81	4.72	2.56	21.46	12.99	7.17	12.40	18.50	6.10	10.71	7.87	31.89	37.40

Dimensions in inches.

Working Diagram

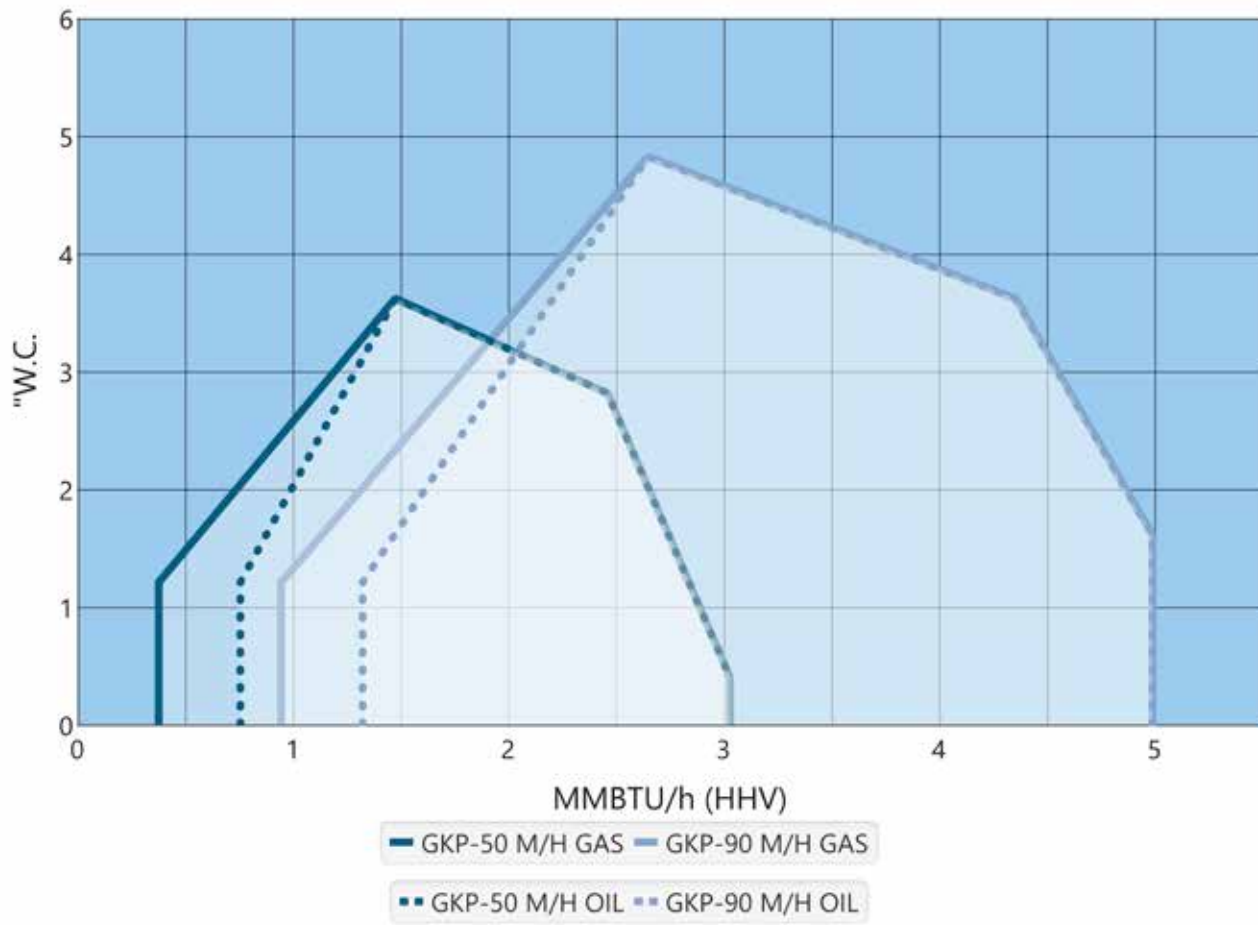

GKP-140 MH...280 MH

Technical Data

BURNER	GKP-140 MH	GKP-150 MH	GKP-250 MH	GKP-280 MH
Capacity, MMBtu/h gal/h	1.5 - 8.89 14.6 - 62.2	1.7 - 10.2 17.4 - 70.5	1.9 - 9.8 17.1 - 68.4	1.9 - 12.49 23.6 - 87.0
Burner motor 3~ 208-600 V 60 Hz				
Output hp	5.5	7.5	7.5	10
Current A/460 V	6.2	8.9	8.9	11.9
Speed rpm	3510	3510	3510	3510
Oil pump - Motor 3~ 208-600 V 60 Hz				
Output hp	1	1	1	1
Current A/460 V	1.5	1.5	1.5	1.5
Speed rpm	3510	3510	3510	3510
Control unit	WDx00i	WDx00i	WDx00i	WDx00i
Oil hose connection - suction - return	3/4" NPT 3/8" NPT	3/4" NPT 3/8" NPT	3/4" NPT 3/8" NPT	3/4" NPT 3/8" NPT
Weight lb*	357	362	595	613

*) Only burner


LFO: 1 gal/h = 140 MBtu/h

Ratio level Gas 1:6 (100 - 16,6%)

Ratio level LFO 1:2,5 (100 - 40%)

Note! The weight varies according to delivery contents.

Dimensions


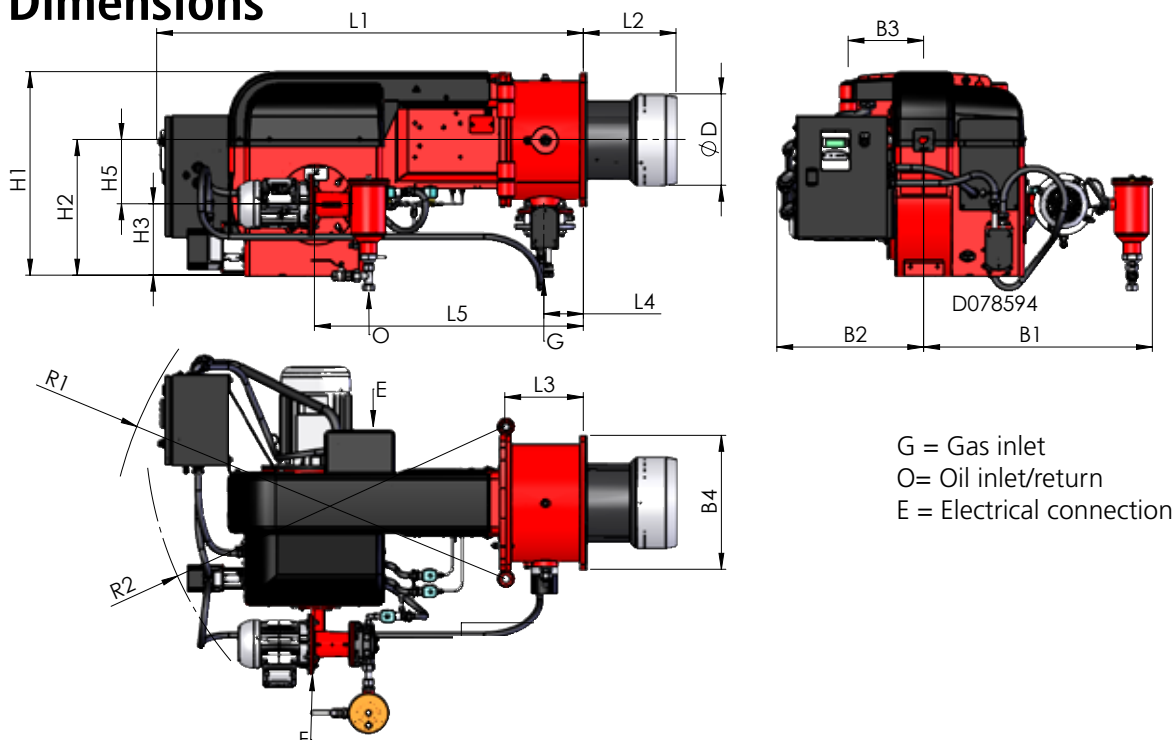


BURNER	L1	L2	L3	L4	L5
GKP-140 MH	53.74	8.66	10.24	5.08	34.65
GKP-150 MH	53.74	9.06	10.24	5.08	34.65
GKP-250 MH	55.71	11.81	10.24	5.12	35.04
GKP-280 MH	55.71	12.28	10.24	5.12	35.04

BURNER	H1	H2	H3	H5	B1	B2	B3	B4	ØD1	R1	R2
GKP-140 MH	24.61	15.75	8.27	7.68	28.43	18.31	8.27	14.17	9.45	50.00	45.28
GKP-150 MH	24.61	15.75	8.27	7.68	28.43	18.90	8.27	14.17	10.63	50.00	45.28
GKP-250 MH	26.57	17.56	9.25	8.46	29.69	19.29	9.84	17.32	10.63	51.97	47.24
GKP-280 MH	26.57	17.56	9.25	8.46	29.69	19.29	9.84	17.32	11.81	51.97	47.24

Dimensions in inches.

Working Diagrams

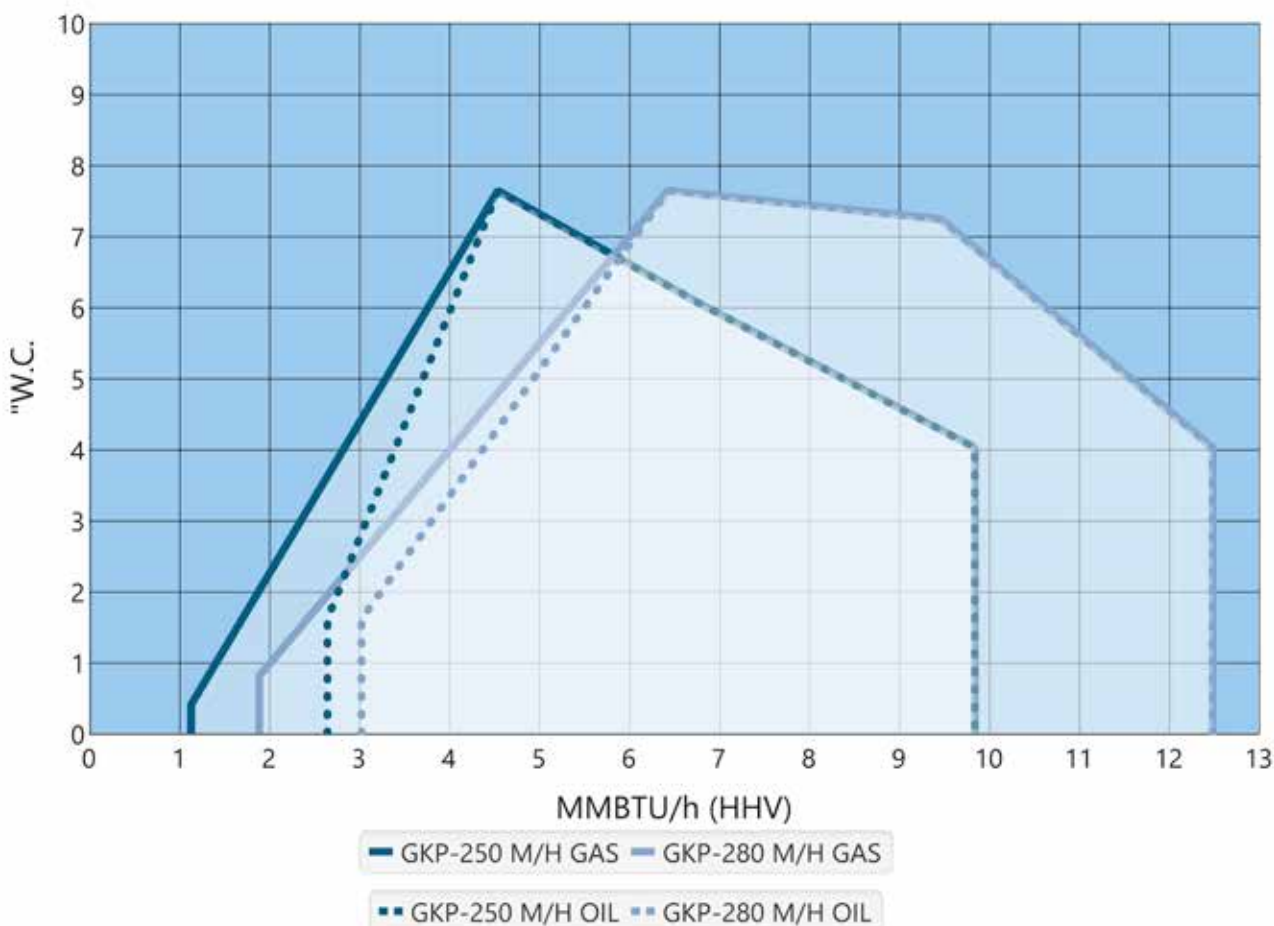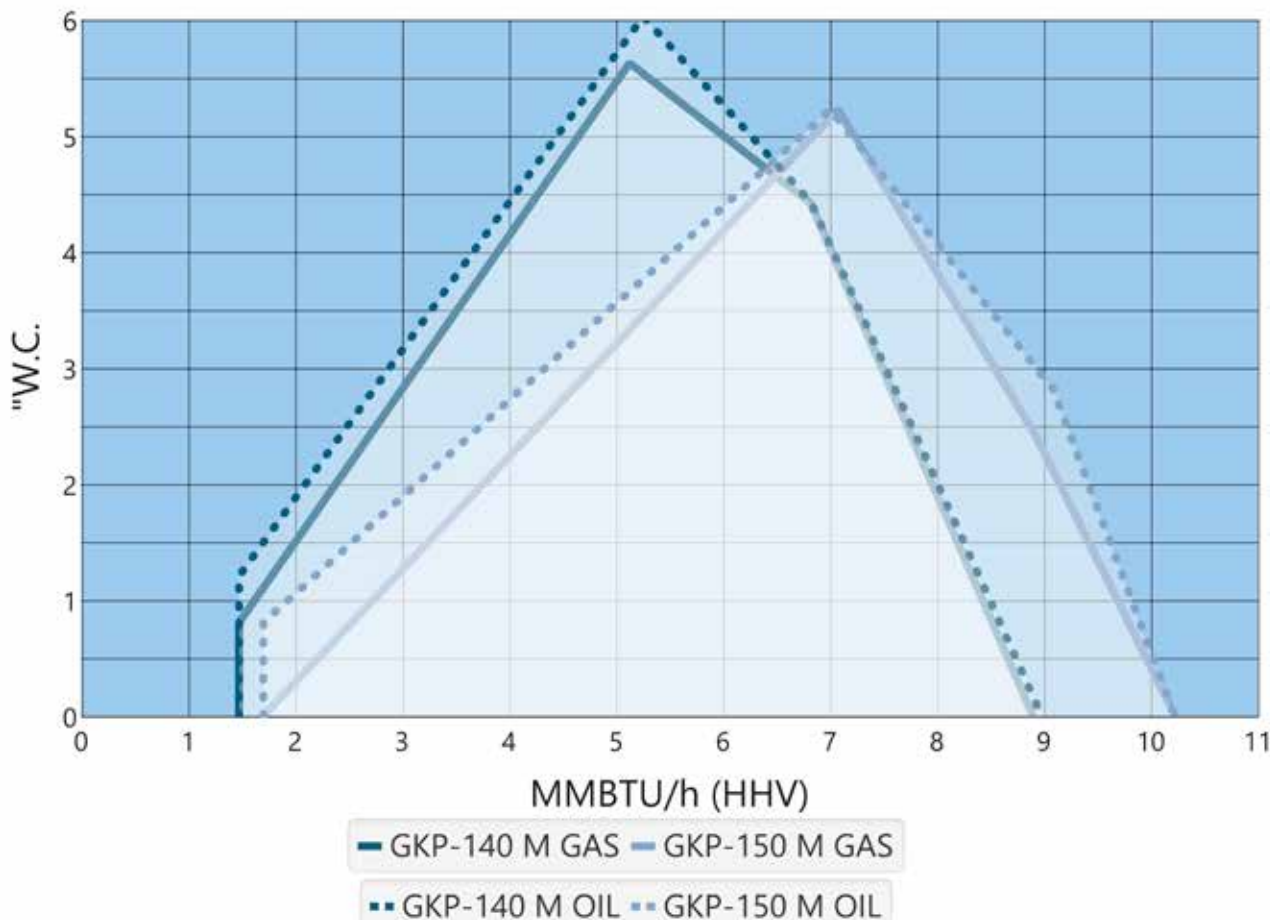

Scope of Delivery GKP-50...280

	50/90	140...280
Hinge flange with limit switch	x	x
Burner flange gasket	x	x
WiseDrive (electronic ratio control)	x	x
Ignition transformer	x	x
Ignition cables and electrodes	x	x
Flame sensor	x	x
Inbuilt combustion air fan	x	x
Air damper with servomotor	x	x
Gas damper with servomotor	x	x
Gas nozzle	x	x
Connection for measuring the pressure in gas nozzle	x	x
Gas pressure switch, max.	x	x
Differential air pressure switch	x	x
Single solenoid valve for gas	x	-
Double solenoid valve for gas	o	x
Pressure switch for gas, min.	x	x
Pressure regulation valve for gas	x	x
Ignition gas valve*	-	x
Oil nozzle	x	x
Solenoid valves for oil	x	x
Oil pump with pressure regulation valve	x	x
Oil regulating valve with servomotor	-	x
Separate motor for oil pump	-	x
Pressure gauge/gauges for oil	o	x
Pressure switch for return oil	-	x
2 oil hoses, 78.7 inches	o	o
Oil filter	x	x
Deaerator	-	o
LPG gas nozzle	o	o
Gas pressure gauge	o	o
Turbo combustion head	o	o
Fan motor speed sensor	o	o
Frequency converter	o	o
O ₂ control	-	-
Pressure gauge for monitoring of inlet oil pressure	o	o
Pressure switch for monitoring of inlet oil pressure	o	o
Combustion head optimizer with servomotor	-	-
Pressure gauge for fan pressure	o	o
Manual	x	x

x Standard

o Option

*)Always in LN80 burners

Light Fuel Oil Burners

KP-140...280 M

Technical Data


BURNER	KP-140 M	KP-150 M	KP-250 M	KP-280 M
Capacity, gal/h	14.6 - 62.2	17.4 - 74.6	17.1 - 68.4	23.6 - 91.7
Burner motor 3~ 208-600 V 60 Hz				
Output hp	5.5	7.5	10	10
Current A/460 V	6.7	8.9	11.9	11.9
Speed rpm	3510	3510	3510	3510
Oil hose connection - suction	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT
- return	3/8" NPT	3/8" NPT	3/8" NPT	3/8" NPT
Oil pump	TAR2	TAR2	TAR3	TAR3
Control unit	WDx00i	WDx00i	WDx00i	WDx00i
Weight lb*	260	282	322	331

*) Only burner

Ratio level LFO 1:2,5 (100 - 40%)

Note! The weight varies according to delivery contents.

Dimensions

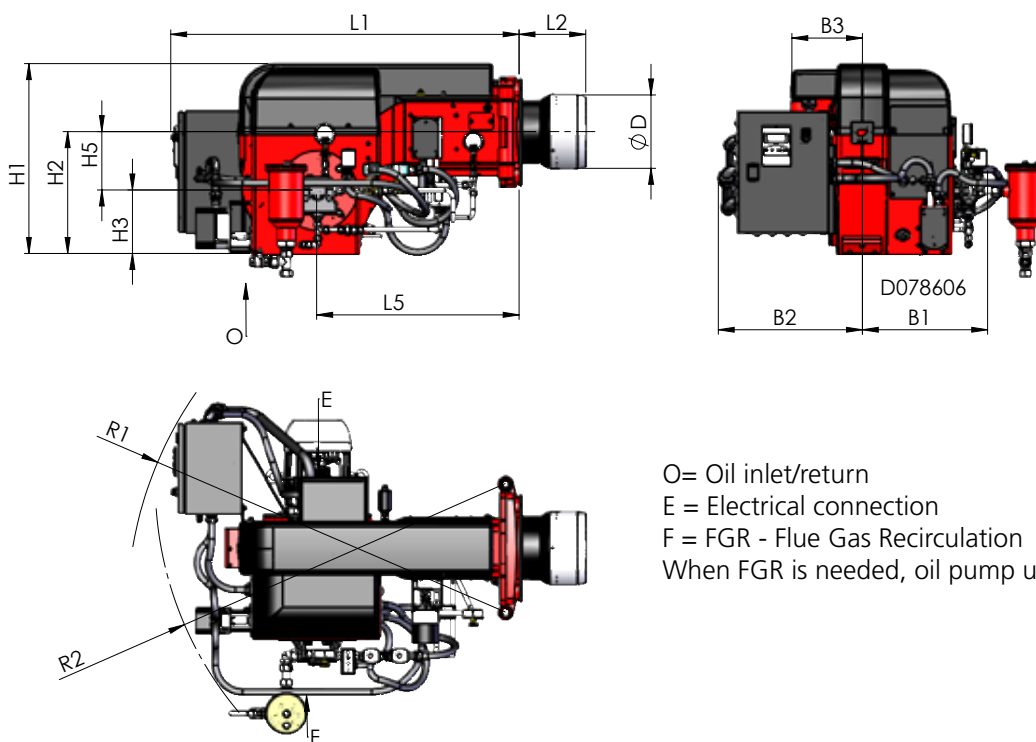


O= Oil inlet/return
E = Electrical connection
F = FGR - Flue Gas Recirculation
When FGR is needed, oil pump unit will be relocated.

BURNER	L1	L2	L5	H1	H2	H3	H5	B1	B2	B3	ØD1	R1	R2
KP-140 M	45.28	8.66	26.30	24.61	15.75	8.27	7.68	16.14	18.90	8.27	9.45	49.21	45.28
KP-150 M	45.28	9.06	26.30	24.61	15.75	8.27	7.68	16.14	18.90	8.27	10.63	49.21	45.28
KP-250 M	47.24	11.81	26.57	26.57	17.56	9.25	8.46	19.49	19.29	9.84	10.63	51.18	47.24
KP-280 M	47.24	12.28	26.57	26.57	17.56	9.25	8.46	19.49	19.29	9.84	11.81	51.18	47.24

Dimensions in inches.

Working Diagram

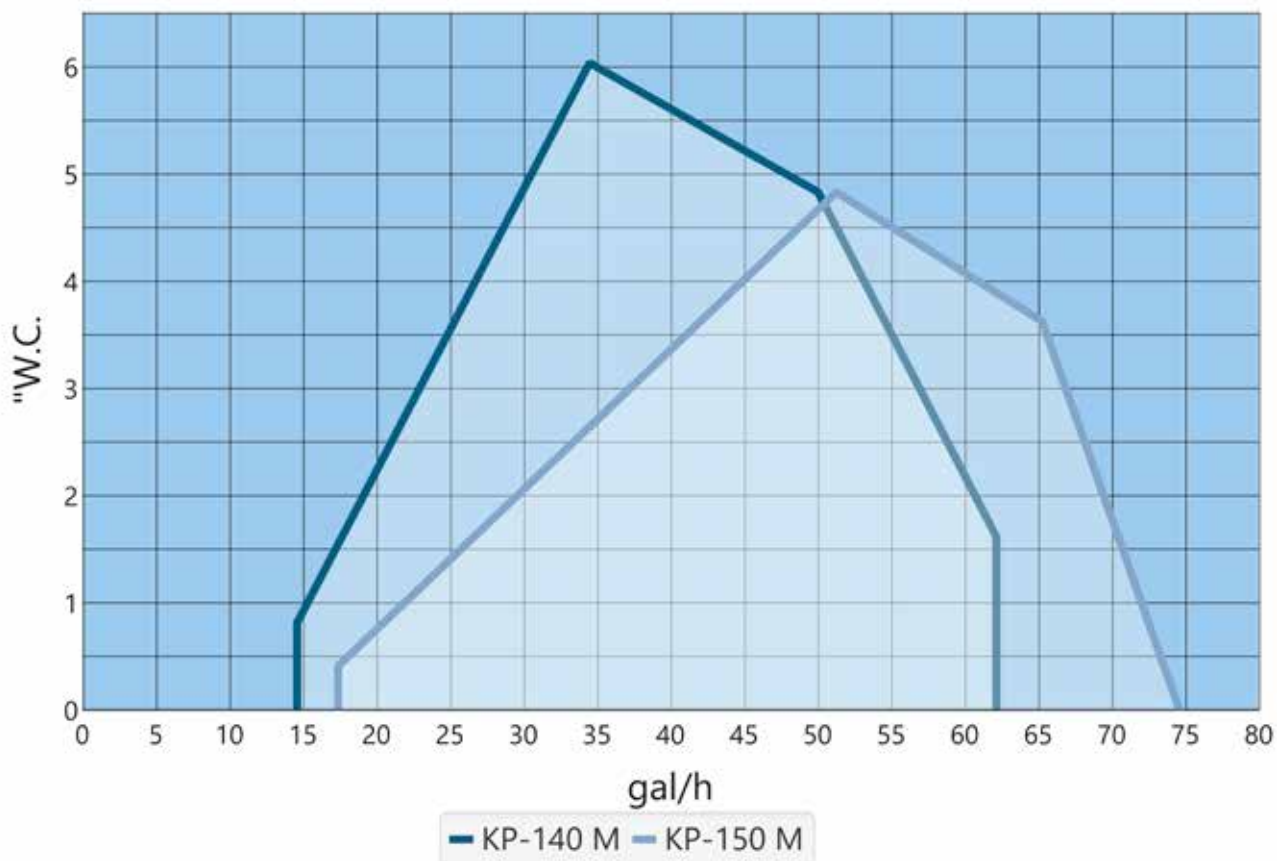


Scope of Delivery KP-140...280

	140...280
Hinge flange with limit switch	x
Burner flange gasket	x
WiseDrive (electronic ratio control)	x
Ignition transformer	x
Ignition cables and electrodes	x
Flame sensor	x
Inbuilt combustion air fan	x
Air damper with servomotor	x
Oil nozzle	x
Solenoid valves for oil	x
Oil pump with pressure regulation valve	x
Oil regulating valve with servomotor	x
Separate motor for oil pump	-
Pressure gauge/gauges for oil	x
Pressure switch for return oil	x
2 oil hoses, 78.7 inches	o
Oil filter	x
Deaerator	o
Turbo combustion head	o
Fan motor speed sensor	o
Frequency converter	o
O ₂ control	-
Pressure gauge for monitoring of inlet oil pressure	o
Pressure switch for monitoring of inlet oil pressure	o
Combustion head optimizer with servomotor	-
Pressure gauge for fan pressure	o
Manual	x

x Standard
o Option

PI Diagrams

GAS, VGD VALVE, M BURNERS

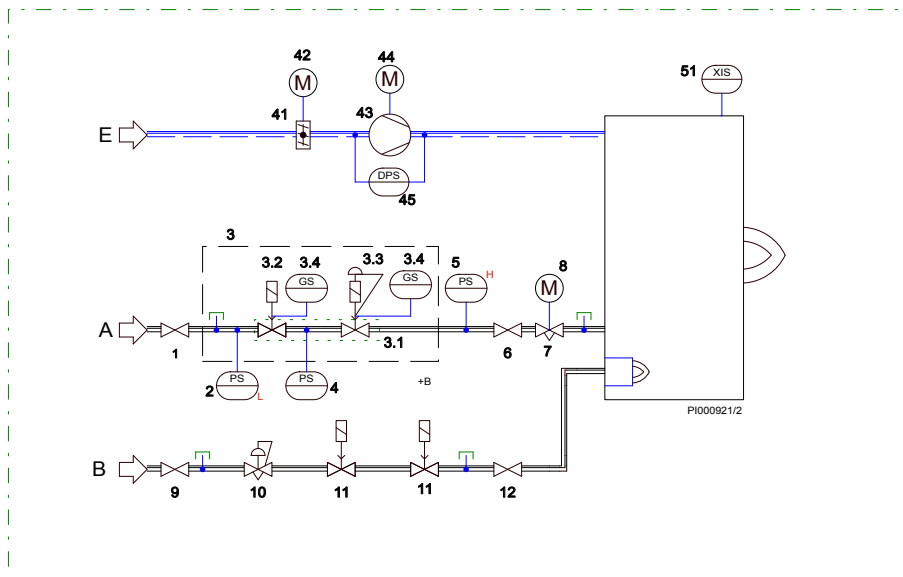

GAS PROCESS COMPONENTS

1. Manual shut-off valve
2. Pressure switch, low
3. Safety shut-off valve
 - 3.1 Valve
 - 3.2 Actuator
 - 3.3 Actuator with pressure regulator
 - 3.4 Proof of closure switch
4. Pressure switch
5. Pressure switch, high
6. Manual shut-off valve
7. Gas butterfly valve
8. Servomotor
9. Manual shut-off valve
10. Pressure regulator
11. Safety shut-off valve
12. Manual shut-off valve

OIL PROCESS COMPONENTS

21. Manual shut-off valve
22. Filter
23. Oil pump
 - 23.1 Oil pump
 - 23.2 Oil regulation valve
24. Electric motor
25. Pressure switch, low
26. Gauge valve
27. Pressure gauge
28. Safety shut-off valve
 - 28.1 Proof of closure switch
29. Solenoid valve, ignition oil
30. Oil regulator valve
31. Servomotor
32. Pressure switch, high
33. Non-return valve
34. Shut-off valve


AIR PROCESS COMPONENTS

41. Air damper
42. Servomotor
43. Combustion air fan
44. Electric motor
45. Differential pressure switch for air, not for KP-models

OTHER COMPONENTS:

51. Flame detector

- A = Gas supply
 B = Ignition gas supply
 C = Oil supply
 D = Oil return
 E = Air supply

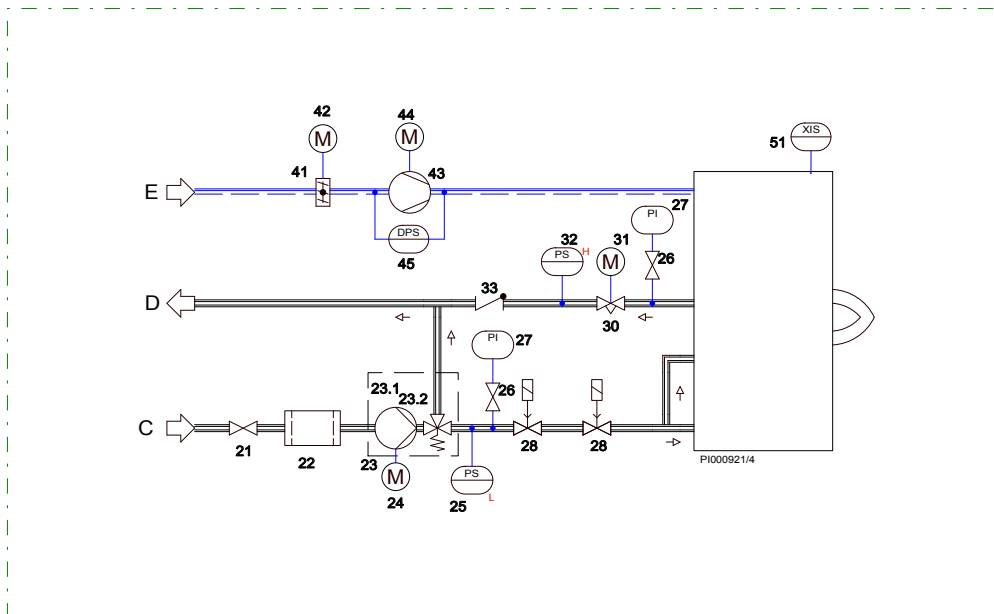

GAS PROCESS COMPONENTS

- 1. Manual shut-off valve
- 2. Pressure switch, low
- 3. Safety shut-off valve
 - 3.1 Valve
 - 3.2 Actuator
 - 3.3 Actuator with pressure regulator
 - 3.4 Proof of closure switch
- 4. Pressure switch
- 5. Pressure switch, high
- 6. Manual shut-off valve
- 7. Gas butterfly valve
- 8. Servomotor
- 9. Manual shut-off valve
- 10. Pressure regulator
- 11. Safety shut-off valve
- 12. Manual shut-off valve

OIL PROCESS COMPONENTS

- 21. Manual shut-off valve
- 22. Filter
- 23. Oil pump
 - 23.1 Oil pump
 - 23.2 Oil regulation valve
- 24. Electric motor
- 25. Pressure switch, low
- 26. Gauge valve
- 27. Pressure gauge
- 28. Safety shut-off valve
 - 28.1 Proof of closure switch
- 29. Solenoid valve, ignition oil
- 30. Oil regulator valve
- 31. Servomotor
- 32. Pressure switch, high
- 33. Non-return valve
- 34. Shut-off valve

AIR PROCESS COMPONENTS

- 41. Air damper
- 42. Servomotor
- 43. Combustion air fan
- 44. Electric motor
- 45. Differential pressure switch for air, not for KP-models

OTHER COMPONENTS:


- 51. Flame detector

- A = Gas supply
- B = Ignition gas supply
- C = Oil supply
- D = Oil return
- E = Air supply


Combustion head and masonry dimensions

Standard combustion head mounting dimensions

Mounting plate

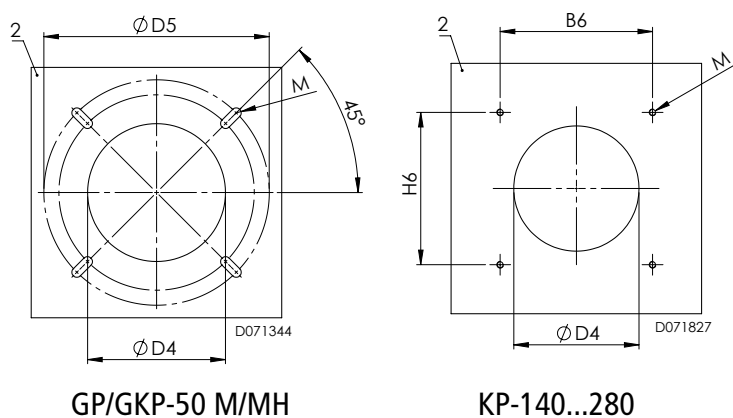

Burner mounting

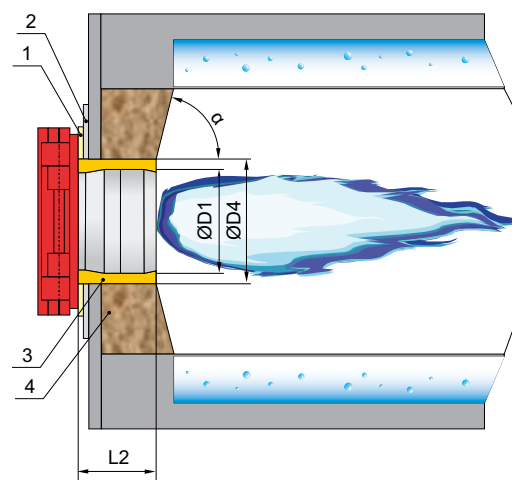

BURNER SERIE	B6	H6	ØD4	ØD5	M	ØD1	L2	α
GP/GKP-50 M/MH	-	-	6.50	9.21 - 10.63	4xM10	6.30	9.45	60° - 90°
GP/GKP-90 M/MH	8.50	8.50	8.27	-	4xM10	7.87	11.81	60° - 90°
GP/GKP/KP-140 M/MH	10.83	10.83	10.63	-	4xM16	9.45	8.66	60° - 90°
GP/GKP/KP-150 M/MH	10.83	10.83	11.81	-	4xM16	10.63	9.06	60° - 90°
KP-250 M	14.37	14.37	11.81	-	4xM16	10.63	11.81	60° - 90°
GP/GKP-250 M/MH	14.37	14.37	11.81	-	4xM16	10.63	11.81	60° - 90°
KP-280 M	14.37	14.37	12.99	-	4xM16	11.81	12.28	60° - 90°
GP/GKP-280 M/MH	14.37	14.37	12.99	-	4xM16	11.81	12.28	60° - 90°


Dimensions in inches.

Accessories WDX00i

Gas options Conversion Kit
Propane (LPG BAND) 50/90, 130...150, 250...280 sizes
Methane manifold drilling, composition to be check with Oilon sales
Stepdown
208/220/460/575V to 110V Transformer mounted in motor control cabinet
Major Upgrade Options
GP/GKP LMV 52 UPGRADE (O2 Trim, VFD, Efficiency Calculation Capabilities)
O2 Trim Kit (Requires LMV 52 UPGRADE Above) O2 electronic, UL 110V 1(4) Electronics
O2 Trim Kit (Requires LMV 52 UPGRADE Above), O2 sensor 3(4)
O2 Trim Kit (Requires LMV 52 UPGRADE) Additional Canbus Cable (35ft) 4(4)
GAS Flow Meter (Requires LMV 52 UPGRADE Above)
Gas train option
1 1/2", 2" diaphragm pressure regulator to meet CSA 149.3 field approval (Dungs, Maxitrol)
- 1/4" NPT ball valve manifold pressure kit, 1 of 3
- pressure gauge 0-60" WC manifold pressure kit, 2 of 3
- 1/4" x 3" nipple manifold pressure kit, 3 of 3
1 1/2", 2", 2 1/2" Apollo manual closing valve UL
1 1/2", 2", 2 1/2" gas strainer, cast iron
1 1/2" CSA lubricated plug valve, 1 of 2
2" CSA lubricated plug valve, 1 of 2
Handle for CSA lubricated plug valves 1-1/2 and 2", 2 of 2
2 1/2" CSA lubricated plug valve, 1 of 2
Handle for CSA 2 1/2"...3" plug valve, 2 of 2
2 1/2" CSA lubricated plug valve, 1 of 2
Handle for CSA 2 1/2"...3" plug valve, 2 of 2
2", 2.5", 3", 4" VGD Standard Valve UL gas module for 140...280M WDX3x, 110V, 2...5PSI, 1 pcs POC, SKP25 pressure regulator, min/max gas pressure switch
2" VGG Siemens single body NPT, 2-5PSI, 110V, complete with pressure switches
2" BIOGAS BUTTERFLY ASSEMBLY VRG10.050U (SCC) BUTTERFLY VALVE 1(3)
AGA93.1 assembly brackets 2(3)
2" VRD Siemens Bio gas double body NPT, 2-5PSI, 110V, complete with pressure switches, left handed 3(3)

Temperature & Pressure Sensors	
Temp. Sen.	Air temp, High temp 1200C, PT1000 , 1/2" NPT, no well
Temp. Sen.	Water PT1000 ,immersion type, 1/2" NPT, 4" well, LMV
Temp. Sen.	Water PT1000 ,immersion type, 1/2" NPT, 6" well, LMV
Pres. sen.	0 - 15, 0 - 150, 0 - 300 PSI, 4-20mA, 1/4" NPT
Uline Shipping Boxes	
Size 50...90 plywood box for heavy duty shipping	
De-aerator	
Oilon Plus one pipe system deaerator, NPT, UL model	

Packing

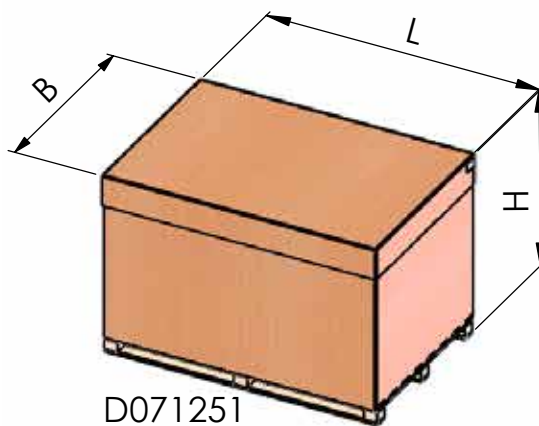


BURNER SERIE	Dimensions			Weight lb	Material standard
	L	B	H		
GP-50 M	57.9	45.3	34.6	11.0	Board
GP-90 M	57.9	45.3	34.6	15.4	Board
GP-140...280 M...	64.6	48.0	34.6	121.3	Board
GKP-50 MH	57.9	45.3	34.6	11.0	Board
GKP-90 MH	57.9	45.3	34.6	15.4	Board
GKP-140...280 M...	64.6	48.0	34.6	121.3	Board
KP-140...280 M...	57.9	45.3	34.6	103.6	Board

Dimensions in inches.




WDx00 - Separate Control Cabinet

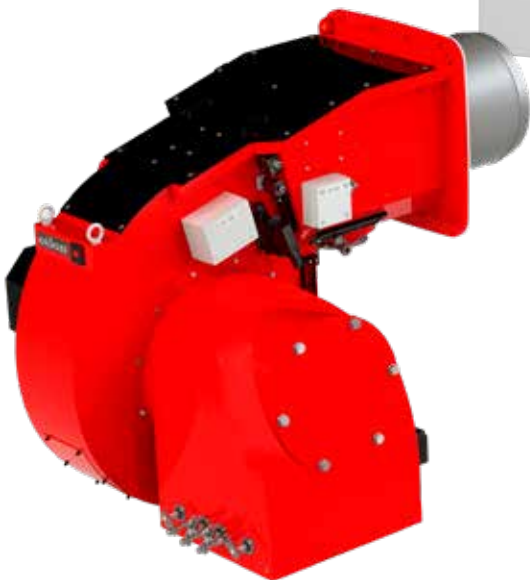

WiseDrive WDx00

Example of Oilon WiseDrive WD100 Electronic fuel/air ratio control system

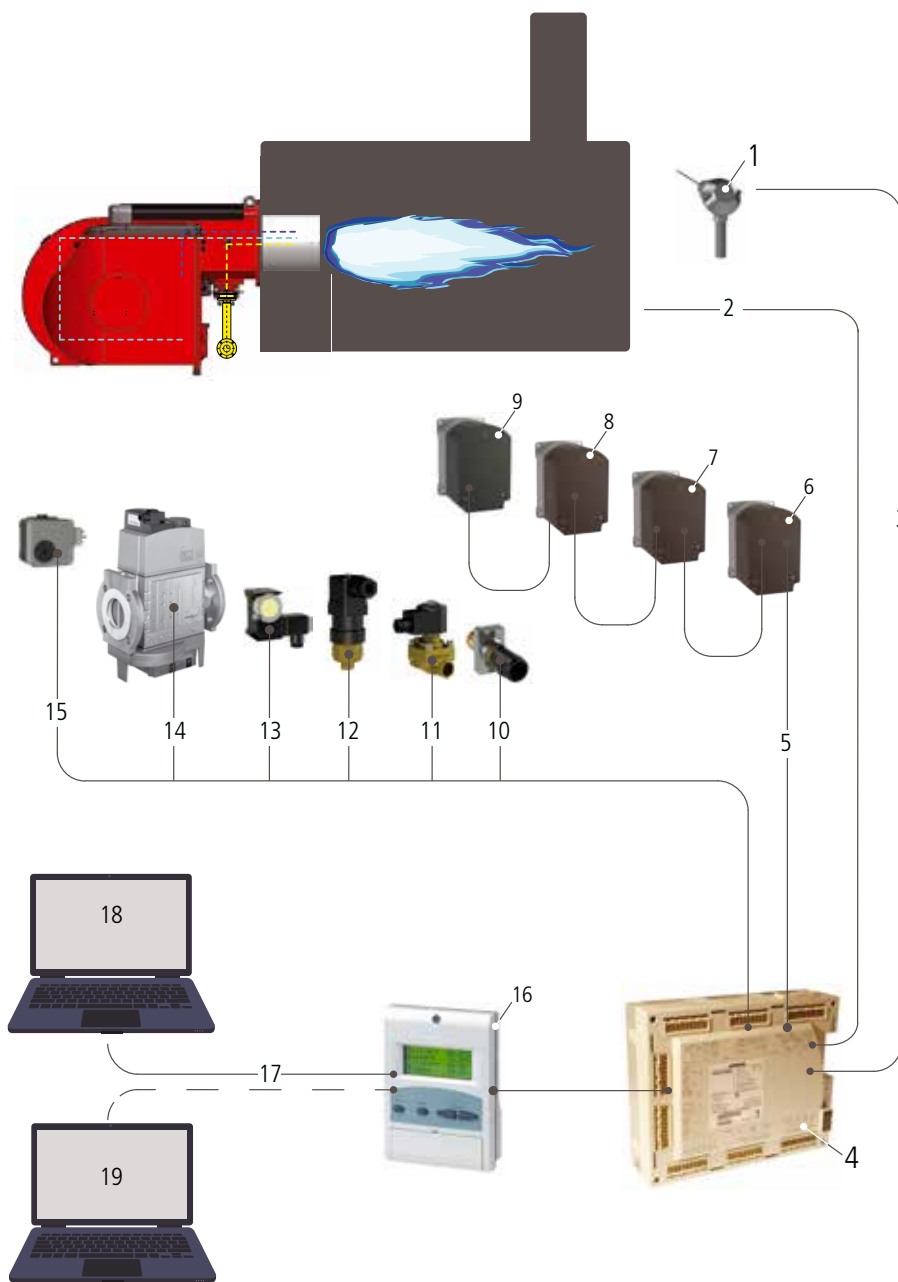


Examples of WiseDrive's functions:

- Control sequences and safety functions
- Fuel/air ratio control
- Combustion head control (option)
- Load control with inbuilt PID controller, control also by an external 4...20 mA signal
- Can be connected with external plant automation via bus. Modbus RTU as standard.
- Different access levels
- Input of parameters via text display operating panel or/and PC (check software and hardware requirements)

1. Boiler pressure/ Boiler temperature
2. Safety devices
3. CAN BUS
4. Control unit
5. CAN BUS - Servomotor
6. Gas damper
7. Air damper
8. Oil regulator
9. Combustion head regulator - Gas/Oil flame plate positioning
10. Flame detector
11. Oil valves
12. Oil pressure switch
13. Gas pressure switch
14. Gas valves
15. Air pressure switch
16. User interface
17. MOD-BUS
18. Control room
19. Service computer

Example of Oilon WiseDrive WD200 Electronic fuel/air ratio control system with O₂ control and variable speed drive (VSD)

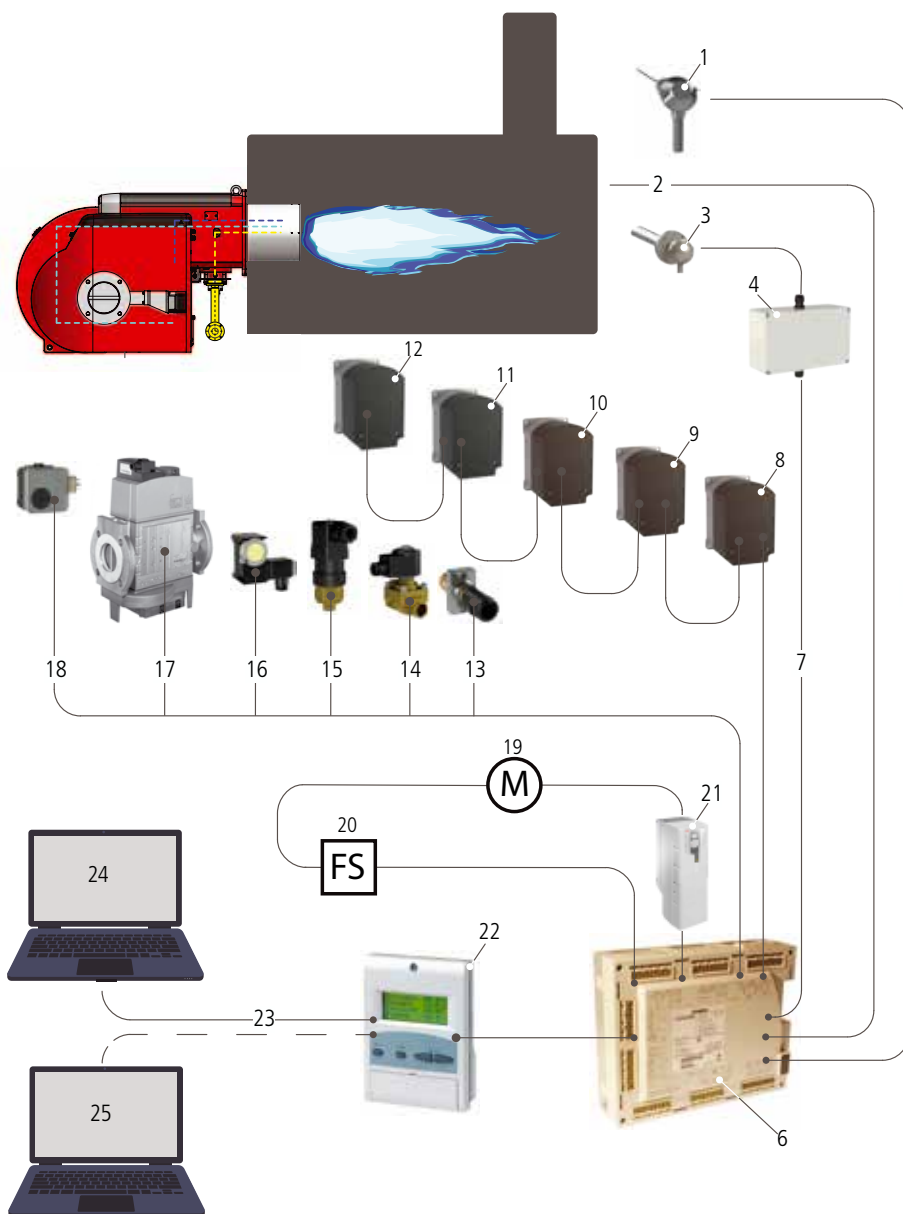

Examples of WiseDrive's functions

- Control sequences and safety functions
- Fuel/air ratio control
- Combustion head control (option)
- Load control with inbuilt PID controller, control also by an external 4...20 mA signal
- Can be connected with external plant automation via bus. Modbus RTU as standard.
- Different access levels
- Input of parameters via text display operating panel or/and PC (check software and hardware requirements)
- Fuel consumption reading (requires flow meter)
- Frequency converter control (requires rotation speed sensor)
- O₂ control (requires O₂ module and O₂ sensor)
- Flue gas temperature reading (requires temperature sensor)
- Combustion air temperature reading (requires temperature sensor)

1. Boiler temperature

2. Safety devices

3. O₂ sensor (option)

4. O₂ module

5. CAN BUS

6. Control unit

7. CAN BUS - Servomotor

8. Gas damper

9. Oil regulator

10. Combustion head regulation/
Gas/Oil flame disc positioning

11. Air damper

12. Flue gas damper

13. Flame detector

14. Oil valves

15. Oil pressure switch

16. Gas pressure switch

17. Gas valves

18. Air pressure switch

19. Motor

20. Speed sensor

21. Frequency converter for variable speed drive

22. User interface

23. MOD-BUS

24. Control room

25. Service computer

Cost savings using O₂ control and variable speed drive (VSD)


1. Effect of O₂ control on the combustion efficiency

In a traditional burner, the O₂ level of flue gases is usually adjusted to about 4 %. When using WD200, a 2 % O₂ level can be reached. Two percent reduction in O₂ level means 1 % rise in efficiency.


2. VSD in fan motor saves electricity consumption

3. When using O₂ control and VSD in fan motor the annual cost savings are largest.

Motor power consumption in 17 MMbh burner

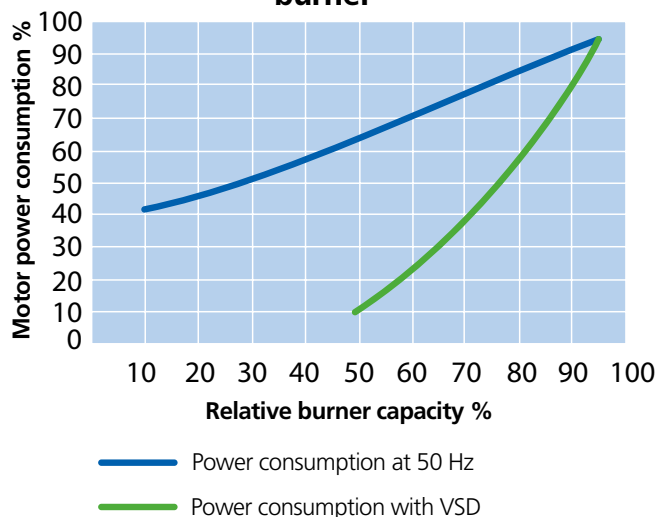


Noise level with VSD and without VSD

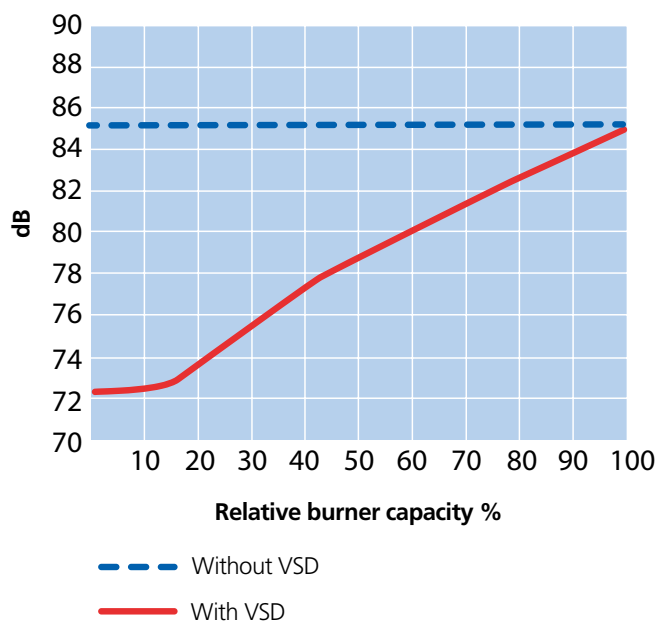

FGR - Flue Gas Recirculation

The effect of FGR in natural gas combustion

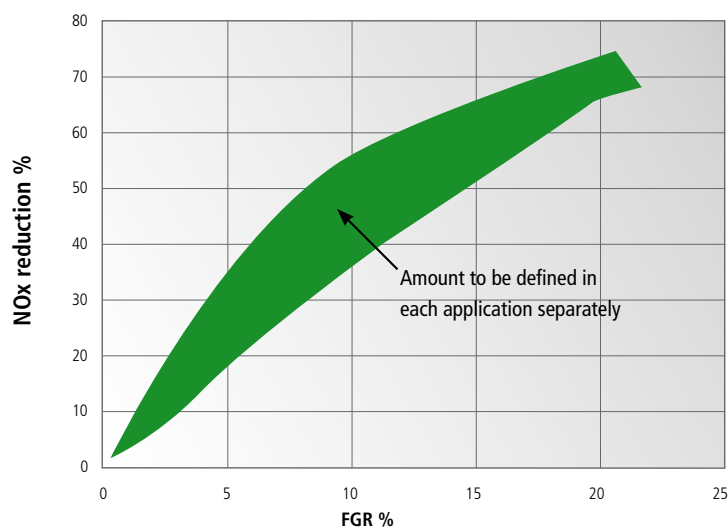


External Flue Gas Recirculation, FGR, is an effective low cost solution to achieve very low NO_x emissions with various fuels.

A certain proportion of flue gas is led back to the furnace through burner. This causes the flame peak temperatures to drop and combustion reactions to slow down, which reduces NO_x emissions.

Achievable reduction depends on many factors including burner type, boiler, combustion air temperature and the amount of recirculated flue gas, see relevant curve. When designing the assembly, it is important to notice the reduction of the burner maximum output caused by flue gas recirculation, depending on the FGR rate and flue gas temperature.

Gas mixture temperature in FGR, standard application

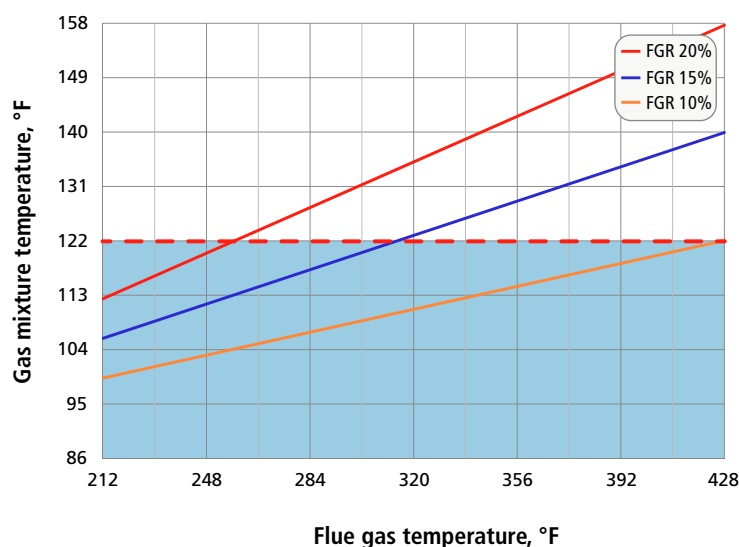


Flue gas recirculation is available as an option for a variety of new burners, or in many cases, as a retrofit to an existing burner.

Diagram valid for 187 °F combustion air


Recommended working range

Boiler efficiency

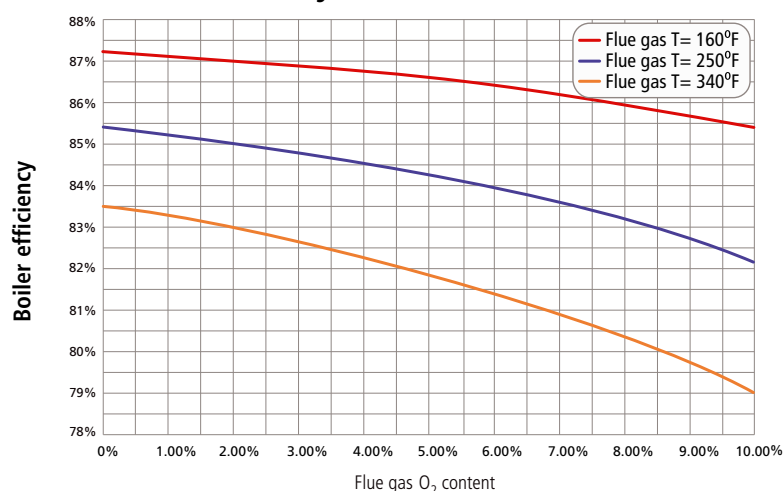

NO_x emissions and required residual O₂ will vary depending on furnace geometry and conditions

Oilon burner FGR application

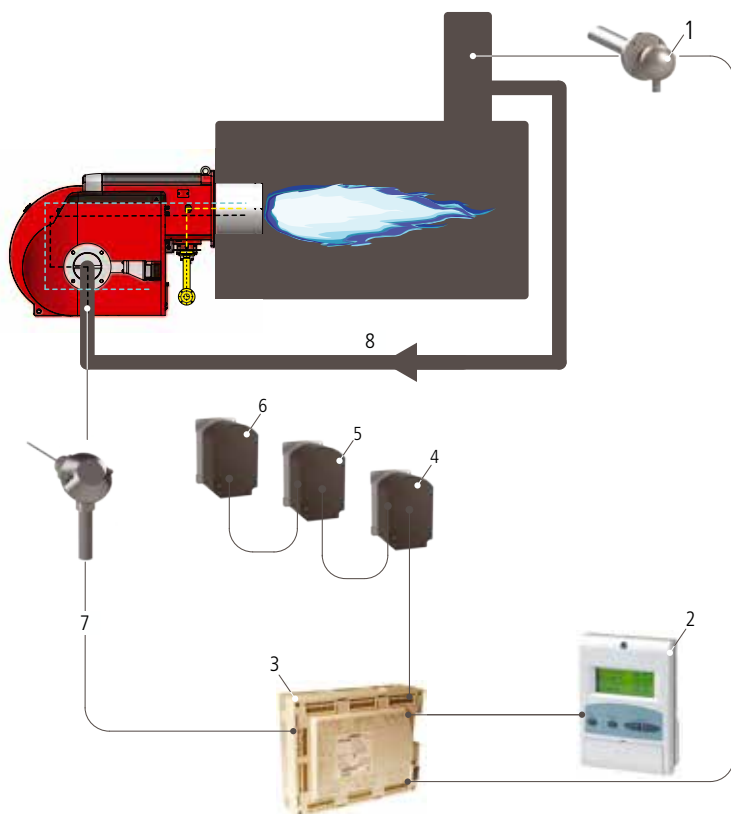

- Minimum required components:
- WD200 burner control system
 - Flue gas damper with servomotor
 - Flue gas inlet adapter
 - Recirculation pipe (in customer scope)

1. O₂ sensor (option)
2. User interface
3. Control Unit
4. Gas damper
5. Air damper
6. Flue gas damper
7. Temperature sensor
8. Recirculation pipe

Example of application



Gas Burners

GP-140...280 M, GP-140...280 M LN80

Technical Data


BURNER	GP-140 M	GP-150 M	GP-250 M	GP-280 M	GP-140 M LN80	GP-250 M LN80	GP-280 M LN80
Capacity MMBtu/h	1.5 - 8.9	1.7 - 10.2	1.4 - 9.8	1.9 - 12.49	1.4 - 6.4	1.3 - 8.0	1.7 - 9.5
Burner motor 3~ 208-600 V 60 Hz							
Output hp	5.5	7.5	7.5	10	5.5	10	10
Current A/460 V	6.2	8.9	8.9	11.9	8.9	11.9	11.9
Speed rpm	3510	3510	3510	3510	3510	3510	3510
Control unit	WDx00	WDx00	WDx00	WDx00	WDx00	WDx00	WDx00
Weight lb*	267	287	353	463	276	364	474

*) Only burner

Ratio level Gas 1:6 (100 – 16,6%)

Note! The weight varies according to delivery contents.

Dimensions

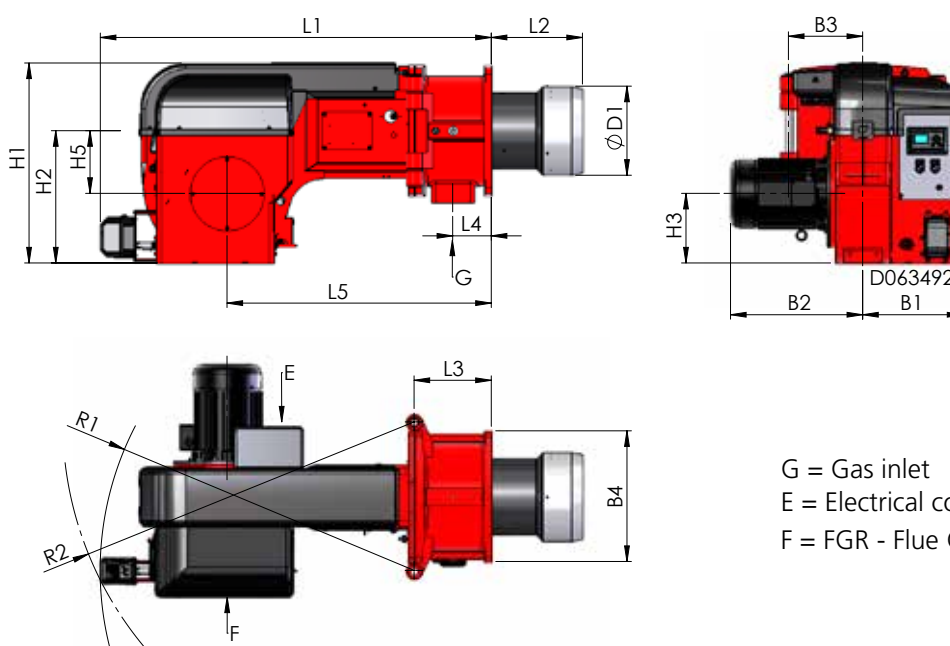

G = Gas inlet
E = Electrical connection
F = FGR - Flue Gas Recirculation



48

BURNER	L1	L2	L2		L3	L4	L5
			C1	C2			
GP-140 M	50.59	8.66	-	-	10.24	5.08	34.65
GP-150 M	50.59	9.06	-	-	10.24	5.08	34.65
GP-250 M	51.97	11.81	-	-	10.24	5.12	35.04
GP-280 M	51.97	12.28	-	-	10.24	5.12	35.04
GP-140 M LN80	50.59	16.93	-	-	10.24	5.08	34.65
GP-250 M LN80	51.97	-	16.54	21.65	10.24	5.12	35.04
GP-280 M LN80	51.97	-	16.54	21.65	10.24	5.12	35.04

BURNER	H1	H2	H3	H5	B1	B2	B3	B4	ØD1	R1	R2
GP-140 M	24.61	15.75	8.27	7.68	12.01	16.93	8.27	14.17	9.45	41.34	45.28
GP-150 M	24.61	15.75	8.27	7.68	12.01	18.90	8.27	14.17	10.63	41.34	45.28
GP-250 M	26.57	17.56	9.25	8.46	13.39	19.29	9.84	17.32	10.63	43.31	47.24
GP-280 M	26.57	17.56	9.25	8.46	13.39	19.29	9.84	17.32	11.81	43.31	47.24
GP-140 M LN80	24.61	15.75	8.27	7.68	12.01	16.93	8.27	14.17	9.45	41.34	45.28
GP-250 M LN80	26.57	17.56	9.25	8.46	13.39	19.29	9.84	17.32	10.08	43.31	47.24
GP-280 M LN80	26.57	17.56	9.25	8.46	13.39	19.29	9.84	17.32	10.87	43.31	47.24

Dimensions in inches.

Working Diagram

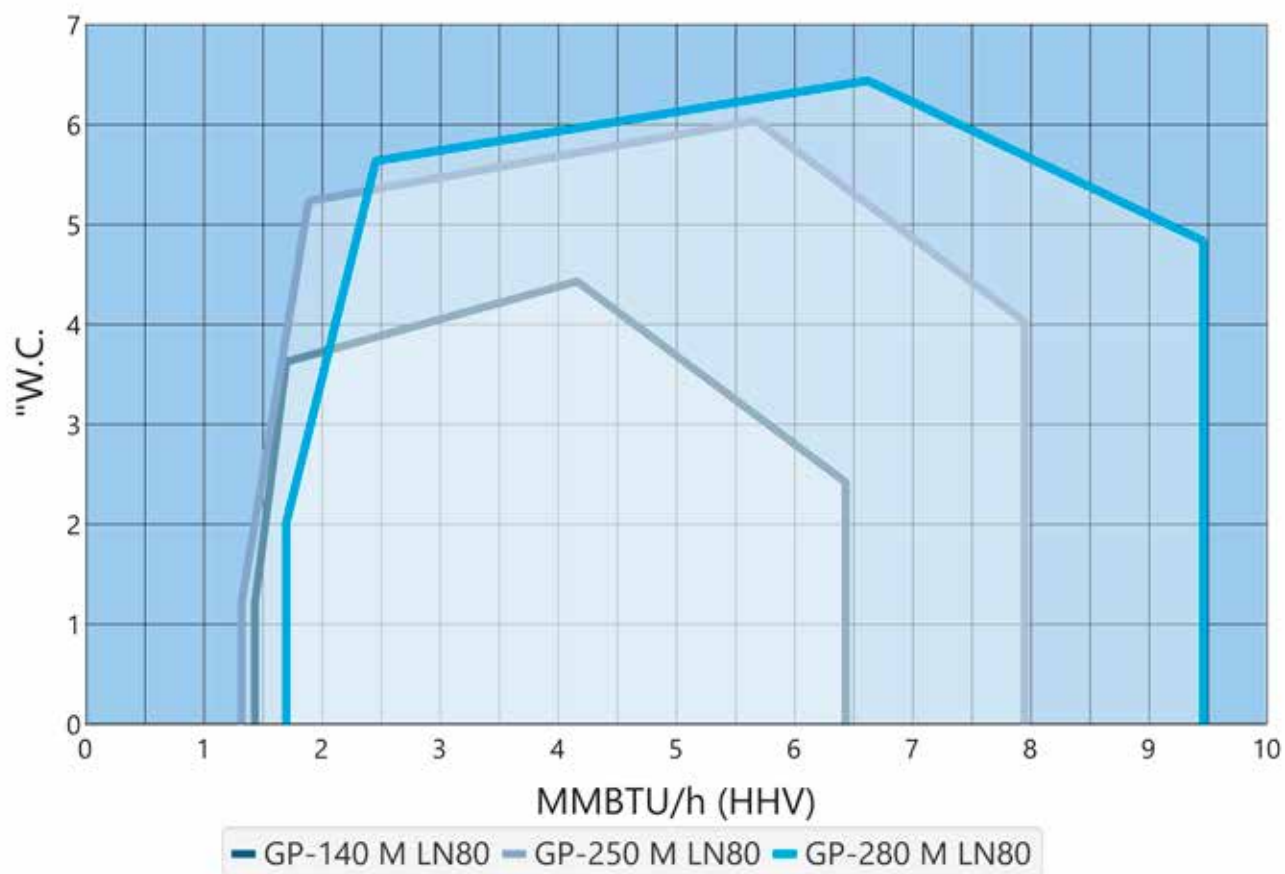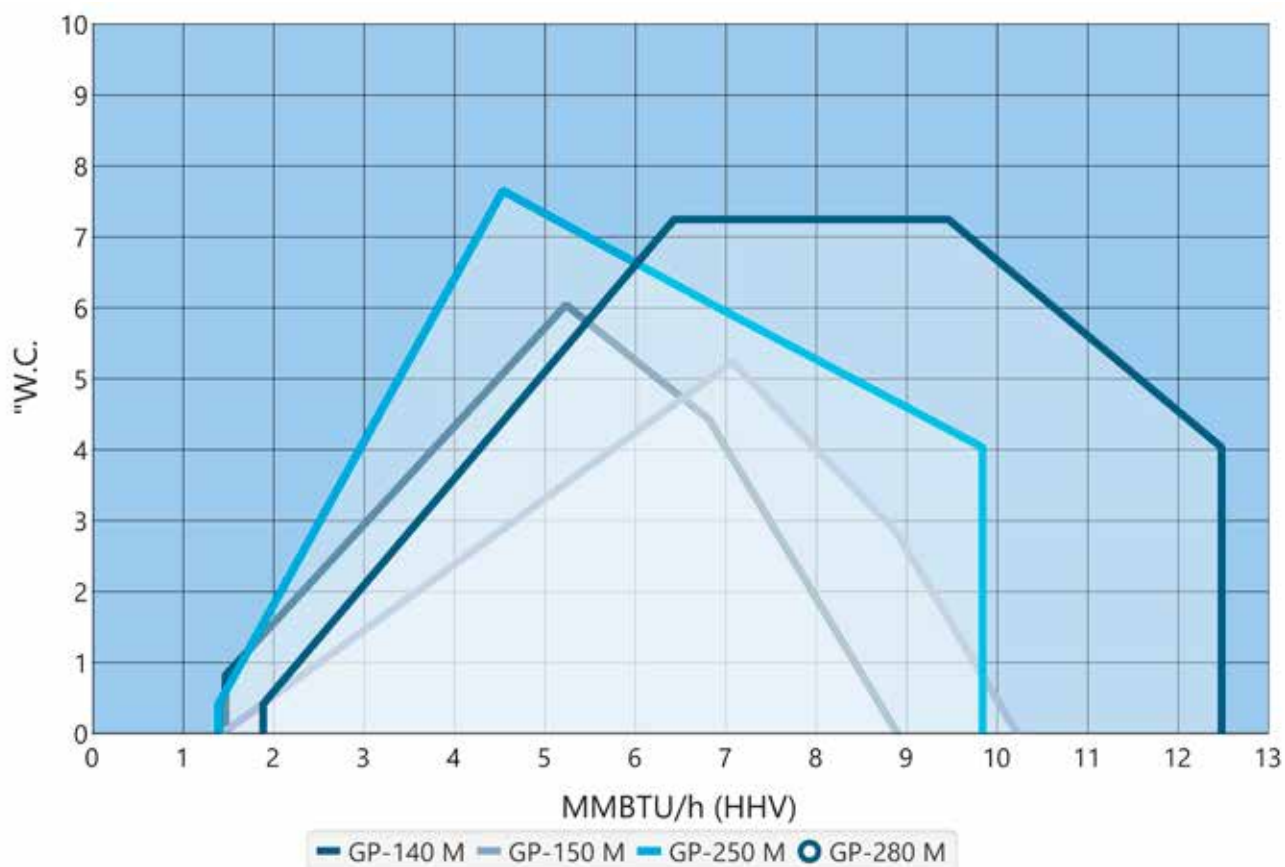

GP-350/450 M, GP-320...450 M LN80

Technical Data


BURNER	GP-350 M	GP-450 M	GP-320 M LN80	GP-350 M LN80	GP-450 M LN80
Capacity MMBtu/h	2.6 - 16.1	3.2 - 20.8	2.0 - 12.1	3.4 - 15.1	3.5 - 19.7
Burner motor 3~ 208-600 V 60 Hz					
Output hp	10	15	10	10	20
Current A/460 V	11.9	17	11.9	11.9	23.5
Speed rpm	3510	3510	3510	3510	3510
Control unit	WDx00	WDx00	WDx00	WDx00	WDx00
Weight lb*	705	992	705	717	1023

*) Only burner

Ratio level Gas 1:6 (100 – 16,6%)

Note! The weight varies according to delivery contents.


Dimensions

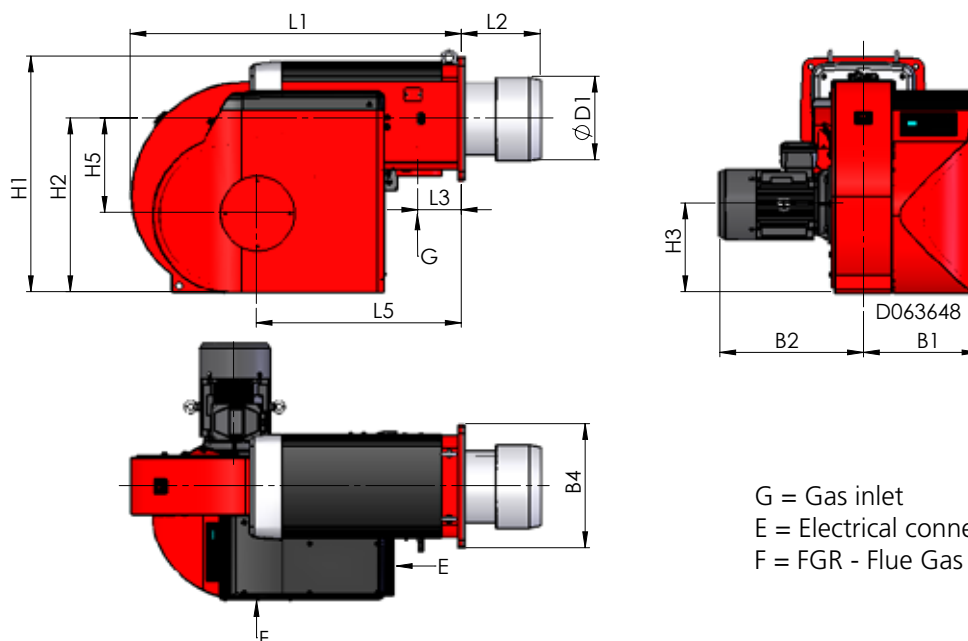

BURNER	L1	L2	L3	L5	H1	H2	H3	H5	B1	B2	B4	ØD1
GP-350 M	53.54	13.78	7.68	31.89	37.01	27.36	13.98	13.58	19.29	22.83	19.29	12.60
GP-450 M	57.87	13.78	7.68	35.83	41.34	30.31	15.55	16.54	20.08	25.59	21.65	14.57
GP-320 M LN80	53.54	19.69	7.68	31.89	37.01	27.36	13.98	13.58	19.29	19.29	19.29	11.89
GP-350 M LN80	53.54	18.90	7.68	31.89	37.01	27.36	13.98	13.58	19.29	22.83	19.29	12.76
GP-450 M LN80	57.87	18.90	7.68	35.83	41.34	30.31	15.55	16.54	20.08	25.59	21.65	12.76

Dimensions in inches.

Working Diagram

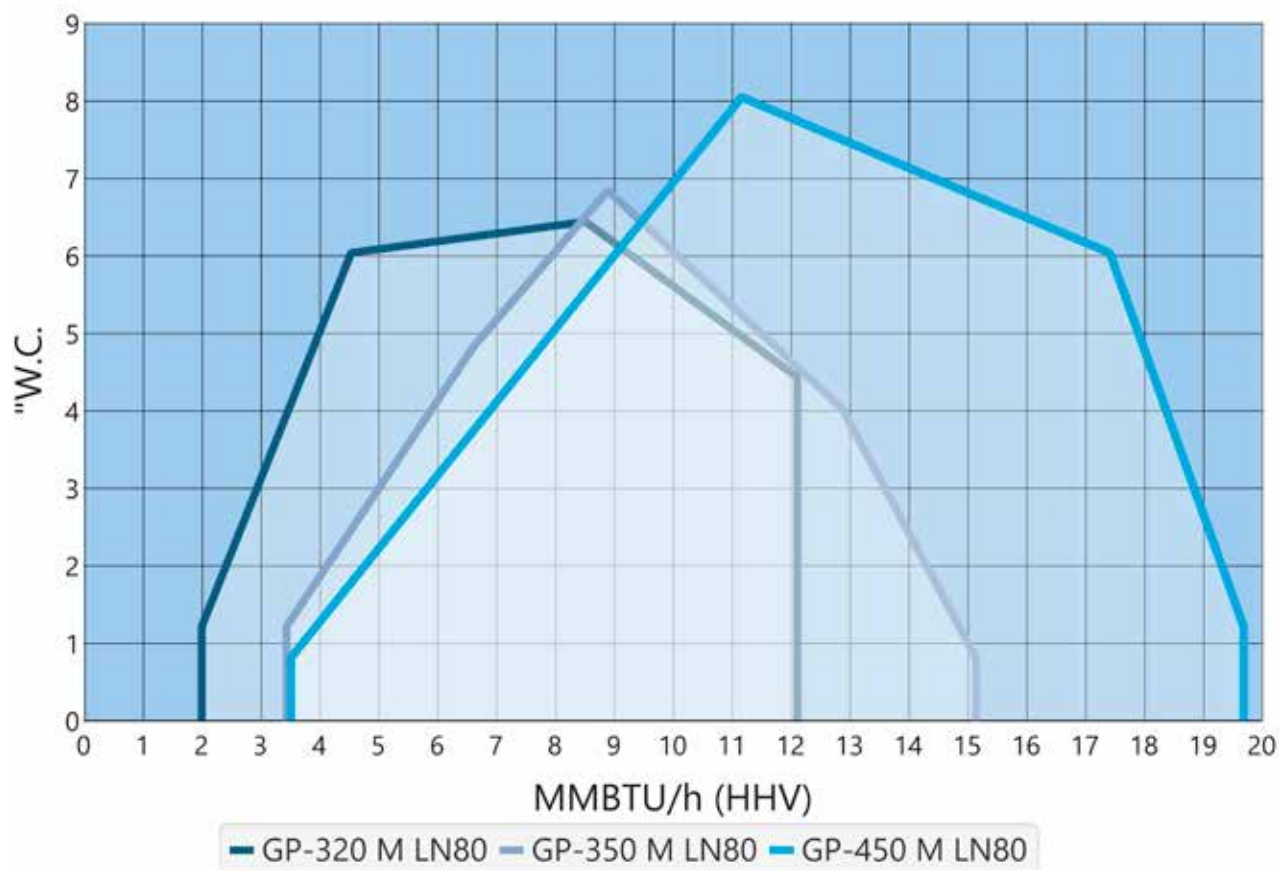

GP-600 M...700 M-III

Technical Data

BURNER	GP-600 M	GP-700 M	GP-700 M-II	GP-700 M-III
Capacity MMBtu/h	3.7 - 25.6	4.5 - 31.8	5.1 - 36.0	5.7 - 39.8
Burner motor 3~ 208-600 V 60 Hz				+ frequency converter
Output hp	20	25	30	40
Current A/460 V	23.5	31	35.8	45
Speed rpm	3510	3510	3510	2970*
Control unit	WDx00	WDx00	WDx00	WDx00
Weight lb**	1014	1179	1246	1488


*) The frequency must be converted to 50 Hz

***) Only burner

Ratio level Gas 1:6 (100 – 16,6%)

Note! The weight varies according to delivery contents.

Dimensions

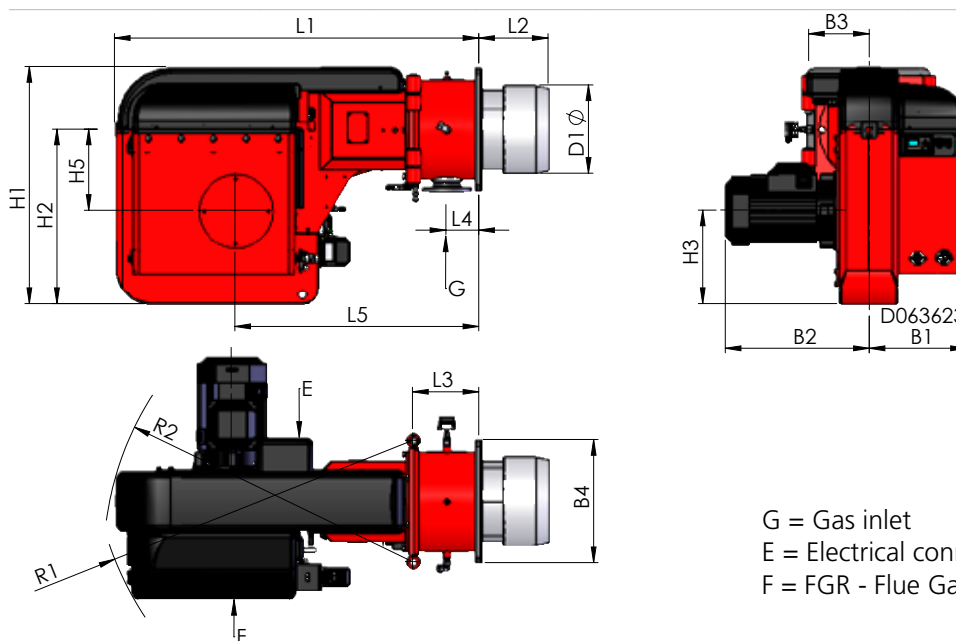


G = Gas inlet
E = Electrical connection
F = FGR - Flue Gas Recirculation

BURNER	L1	L2	L3	L4	L5
GP-600 M	64.96	12.20	11.61	5.71	42.91
GP-700 M	64.96	12.20	11.61	5.71	42.91
GP-700 M-II	64.96	12.20	11.61	5.71	42.91
GP-700 M-III	64.96	15.75	11.61	5.71	42.91

BURNER	H1	H2	H3	H5	B1	B2	B3	B4	ØD1	R1	R2
GP-600 M	41.73	30.71	16.54	14.37	17.13	25.39	10.63	21.65	14.57	56.69	55.12
GP-700 M	41.73	30.71	16.54	14.37	19.29	27.56	10.63	21.65	15.55	57.48	55.12
GP-700 M-II	41.73	30.71	16.54	14.37	19.29	29.92	10.63	21.65	15.55	57.48	55.12
GP-700 M-III	41.73	30.71	16.54	14.37	19.29	33.27	10.63	21.65	16.73	57.48	55.12

Dimensions in inches.

Working Diagram

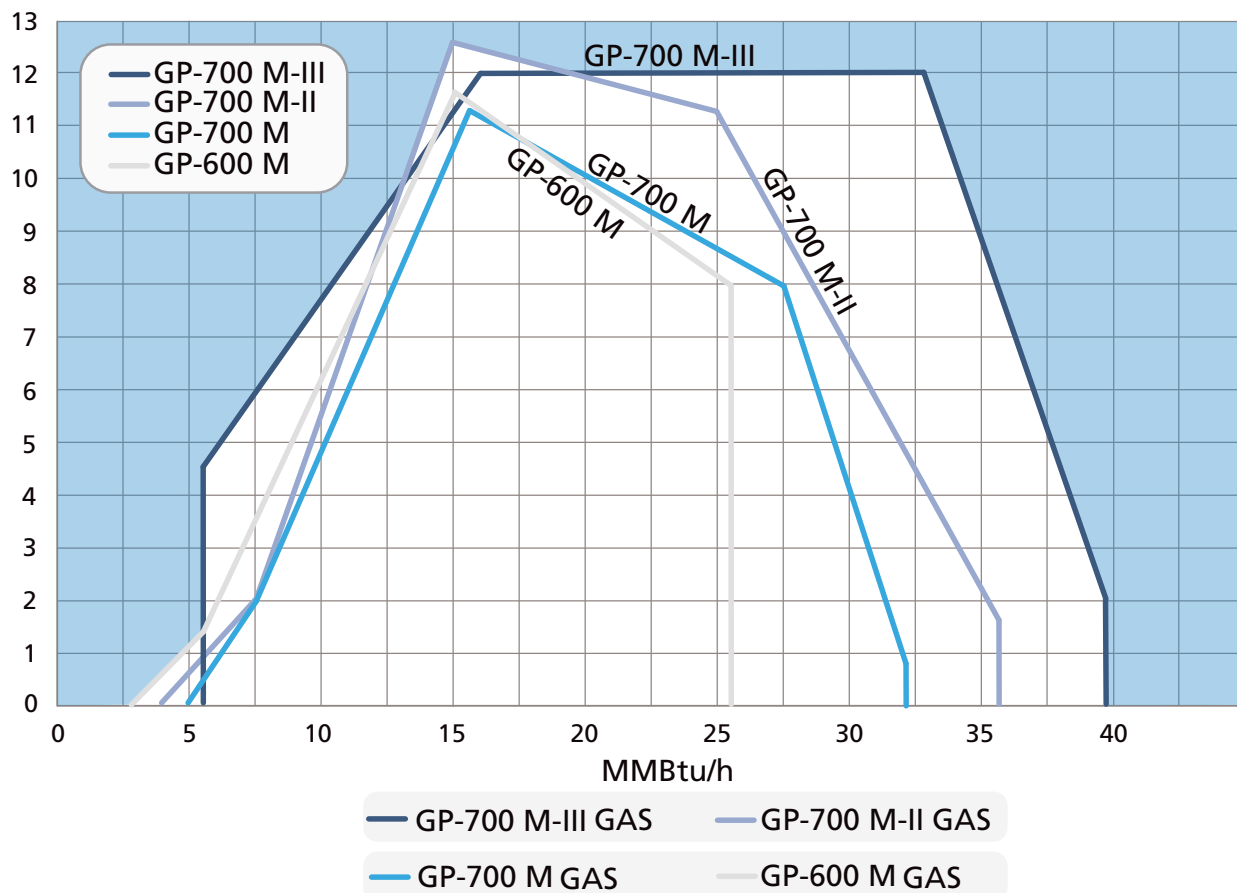

GP-600 M_700 M-III LN80

GP-600 M/GP-700 M-III LN60, GP-600...700 M-III LN80

Technical Data

BURNER	GP-600 M LN60	GP-700 M-III LN60	GP-600 M LN80	GP-700 M-II LN80	GP-700 M-III LN80
Capacity MMBtu/h	3.0 - 24.6	5.2 - 28.4	3.6 - 25.4	4.5 - 28.8	5.7 - 33.3
Burner motor 3~ 208-600 V 60 Hz		+ frequency converter			+ frequency converter
Output hp	25	40	20	30	40
Current A/460 V	34	52	26	38	45
Speed rpm	3510	2970*	3510	3510	2970*
Control unit	WDx00	WDx00	WDx00	WDx00	WDx00
Weight lb**	1069	1510	1025	1499	1543


*) The frequency must be converted to 50 Hz

***) Only burner

Ratio level Gas 1:6 (100 - 16,6%)

Note! The weight varies according to delivery contents.

Dimensions

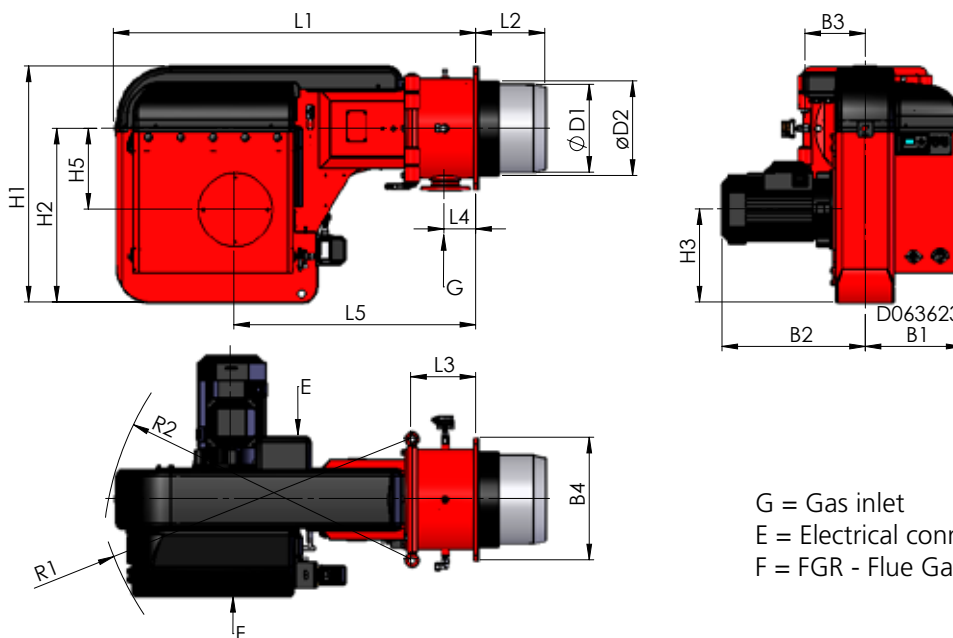



G = Gas inlet
E = Electrical connection
F = FGR - Flue Gas Recirculation

BURNER	L1	L2	L3	L4	L5
GP-600 M LN60	64.96	20.87	11.61	5.71	42.91
GP-700 M-III LN60	64.96	24.02	11.61	5.71	42.91
GP-600 M LN80	64.96	20.87	11.61	5.71	42.91
GP-700 M-II LN80	64.96	20.87	11.61	5.71	42.91
GP-700 M-III LN80	64.96	24.02	11.61	5.71	42.91

BURNER	H1	H2	H3	H5	B1	B2	B3	B4	ØD1	ØD2	R1	R2
GP-600 M LN60	41.73	30.71	16.54	14.37	17.13	25.39	10.63	21.65	16.06	-	56.69	55.12
GP-700 M-III LN60	41.73	30.71	16.54	14.37	19.29	33.27	10.63	21.65	17.52	-	57.48	55.12
GP-600 M LN80	41.73	30.71	16.54	14.37	17.13	25.39	10.63	21.65	15.12	-	56.69	55.12
GP-700 M-II LN80	41.73	30.71	16.54	14.37	19.29	29.92	10.63	21.65	15.98	-	57.48	55.12
GP-700 M-III LN80	41.73	30.71	16.54	14.37	19.29	33.27	10.63	21.65	15.98	-	57.48	55.12

Dimensions in inches.

Working Diagram

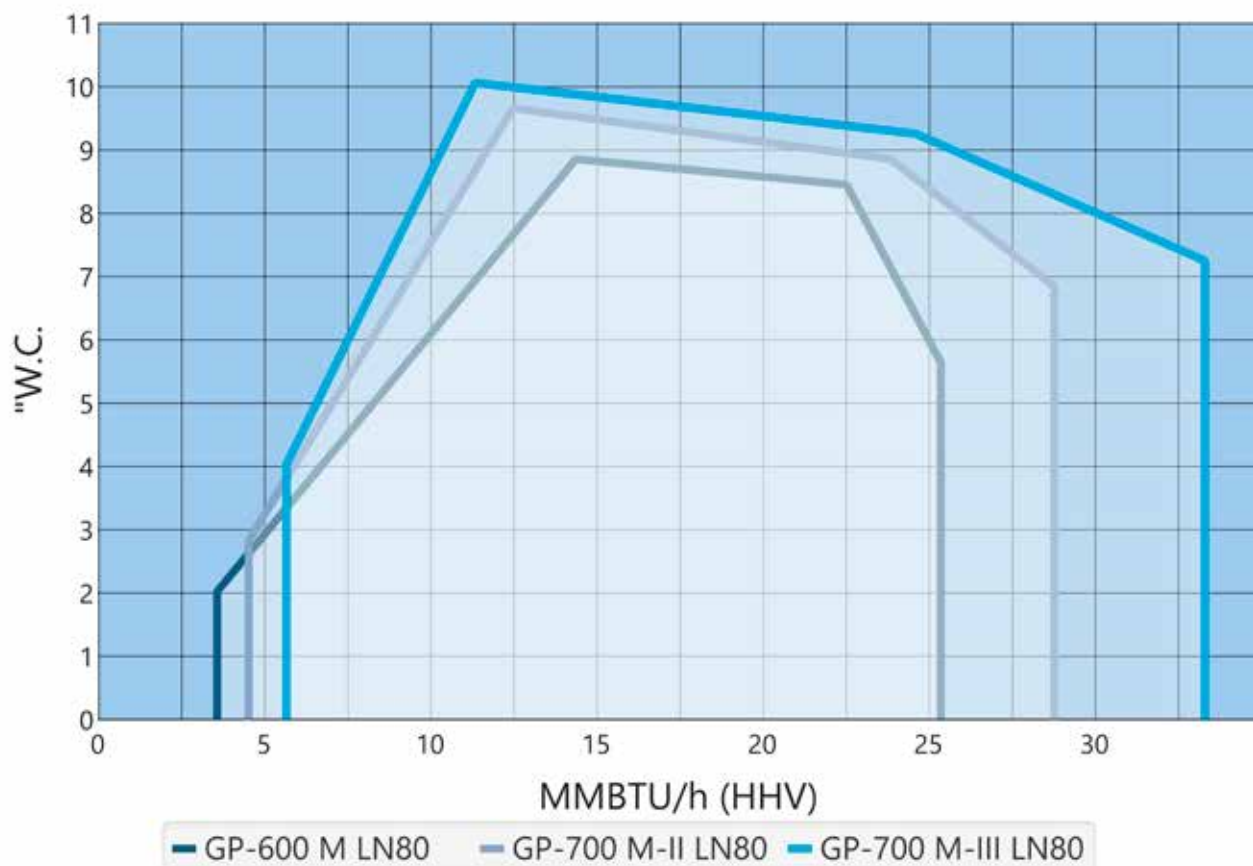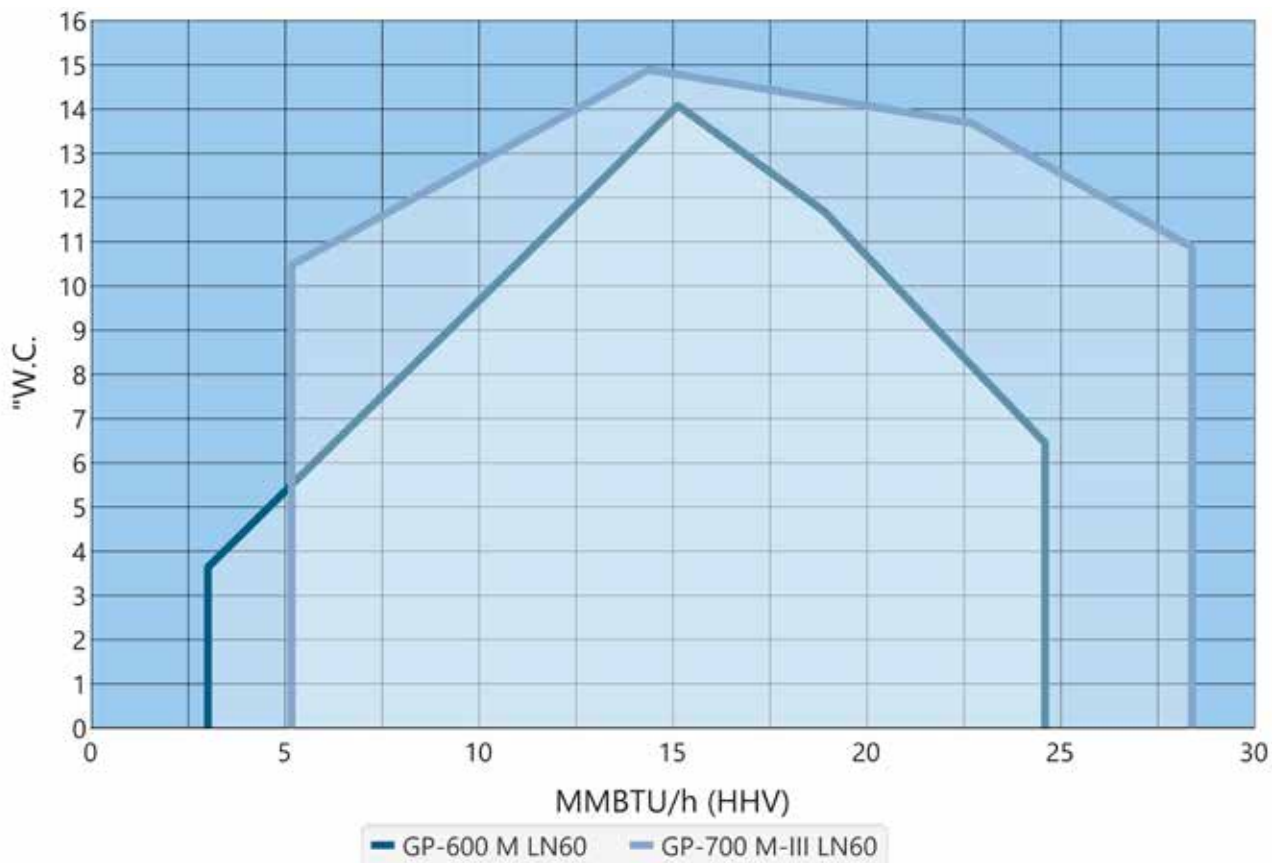

GP-1000/1200 M, GP-1000 M LN80

Technical Data

BURNER	GP-1000 M	GP-1200 M	GP-1000 M LN80
Capacity MMBtu/h	6.8 - 42.0	8.3 - 50.4	6.8 - 41.7
Burner motor 3~ 208-600 V 60 Hz	+ frequency converter	+ frequency converter	+ frequency converter
Output hp	50	60	50
Current A/460 V	55.9	66.7	55.9
Speed rpm*	2970	2970	2970
Control unit	WDx00	WDx00	WDx00
Weight lb**	1720	1830	1742


*) The frequency must be converted to 50 Hz

***) Only burner

Ratio level Gas 1:5 (100 – 20%)

Note! The weight varies according to delivery contents.

Dimensions

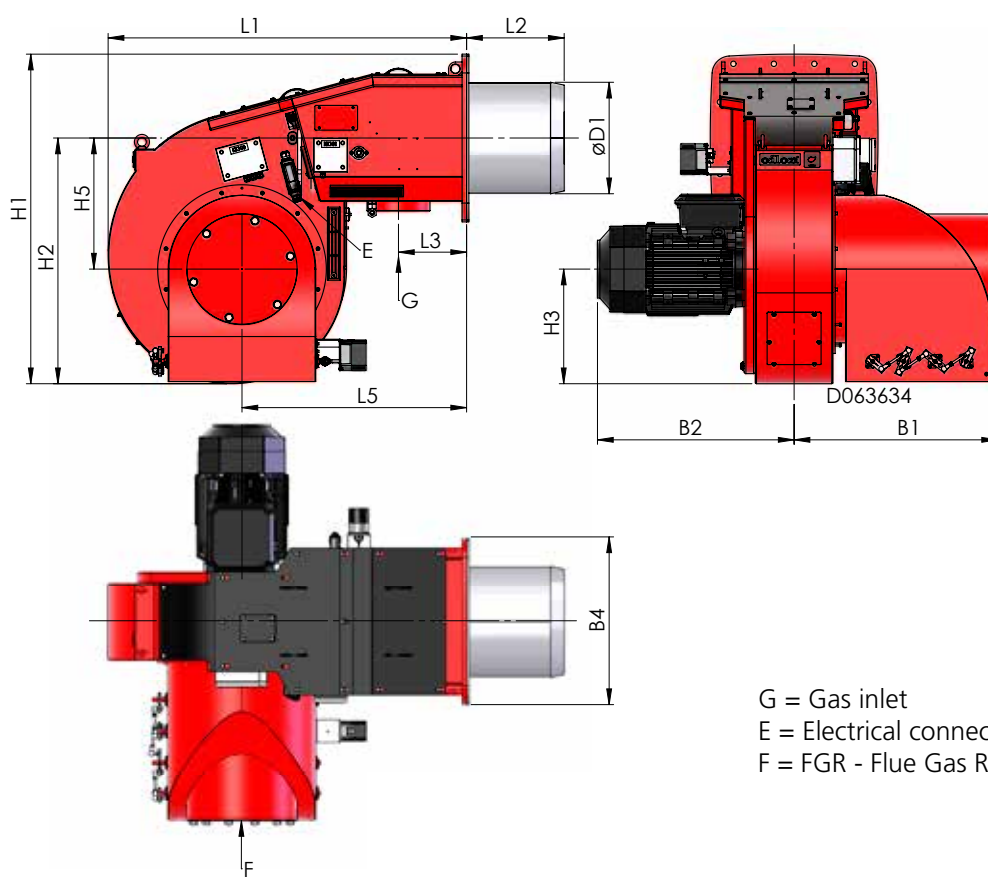

G = Gas inlet
E = Electrical connection
F = FGR - Flue Gas Recirculation

BURNER	L1	L2	L3	L5	H1	H2	H3	H5	B1	B2	B4	ØD1
GP-1000 M	62.99	17.09	11.93	39.37	57.87	43.31	20.08	23.03	35.63	34.65	29.53	19.53
GP-1200 M	62.99	17.09	11.93	39.37	57.87	43.31	20.08	23.03	35.63	36.61	29.53	20.47
GP-1000 M LN80	62.99	25.59	11.93	39.37	57.87	43.31	20.08	23.03	35.63	34.65	29.53	17.87

Dimensions in inches.

Working Diagram



Scope of Delivery GP-140...1200

	140...280	320...450	500...700	1000...1200
Hinge flange with limit switch	x	-	x	-
Burner flange gasket	x	x	x	x
WiseDrive (electronic ratio control)	x	x	x	x
Ignition transformer	x	x	x	x
Ignition cables and electrodes	x	x	x	x
Flame sensor	x	x	x	x
Inbuilt combustion air fan	x	x	x	x
Air damper with servomotor	x	x	x	x
Gas damper with servomotor	x	x	x	x
Gas nozzle	x	x	x	x
Connection for measuring the pressure in gas nozzle	x	x	x	x
Gas pressure switch, max.	x	x	x	x
Differential air pressure switch	x	x	x	x
Double solenoid valve for gas	x	x	x	x
Pressure switch for gas, min.	x	x	x	x
Automatic valve leak testing for gas	x	x	x	x
Pressure regulation valve for gas	x	x	x	x
Ignition gas valve*	x	x	x	x
LPG gas nozzle	o	o	o	o
FGR	o	o	o	o
Gas pressure gauge	o	o	o	o
Turbo combustion head	o	o	o	o
Fan motor speed sensor	o	o	o	o
Frequency converter	o	o	o**	x
O ₂ control	o	o	o	o
O ₂ +CO control	-	-	-	-
Combustion head optimizer with servomotor	-	-	o	-
Pressure gauge for fan pressure	o	o	o	o
Manual	x	x	x	x

x Standard
o Option

*) Always in LN80 burners

***) Included in -700 M-III

Dual Fuel Burners
Gas/Light Fuel Oil
2.1 - 49.9 MMBtu/h

GKP-140 M...280 M, GKP-140/250 M LN80

Technical Data

BURNER	GKP-140 M	GKP-150 M	GKP-250 M	GKP-280 M	GKP-140 M LN80	GKP-250 M LN80
Capacity MMBtu/h gal/h	1.5 - 8.9 14.6 - 62.2	1.7 - 10.2 17.4 - 70.5	1.4 - 9.8 17.1 - 68.4	1.9 - 12.49 23.6 - 87.0	1.4 - 6.4 9.9 - 44.4	1.3 - 780 21.1 - 55.0
Burner motor 3~ 208-600 V 60 Hz						
Output hp	5.5	7.5	7.5	10	5.5	10
Current A/460 V	6.2	8.9	8.9	11.9	6.2	11.9
Speed rpm	3510	3510	3510	3510	3510	3510
Control unit	WDx00	WDx00	WDx00	WDx00	WDx00	WDx00
Oil hose connection - suction - return	3/4" NPT 3/8" NPT	3/4" NPT 3/8" NPT	3/4" NPT 3/8" NPT	3/4" NPT 3/8" NPT	3/4" NPT 3/8" NPT	3/4" NPT 3/8" NPT
Oil pump - Motor 3~ 208-600 V 60 Hz	TAR2	TAR2	TAR3	TAR3	TAR2	TAR2
Output hp	1	1	2	2	1	1
Current A/460 V	2.8	2.8	2.8	2.8	2.8	2.8
Speed rpm	3510	3510	3510	3510	3510	3510
Weight lb*	357	362	595	613	364	604

*) Only burner


LFO: 1 gal/h = 140 MBtu/h

Ratio level Gas 1:6 (100 - 16,6%)

Ratio level LFO 1:2,5 (100 - 40%)

Note! The weight varies according to delivery contents.

Dimensions

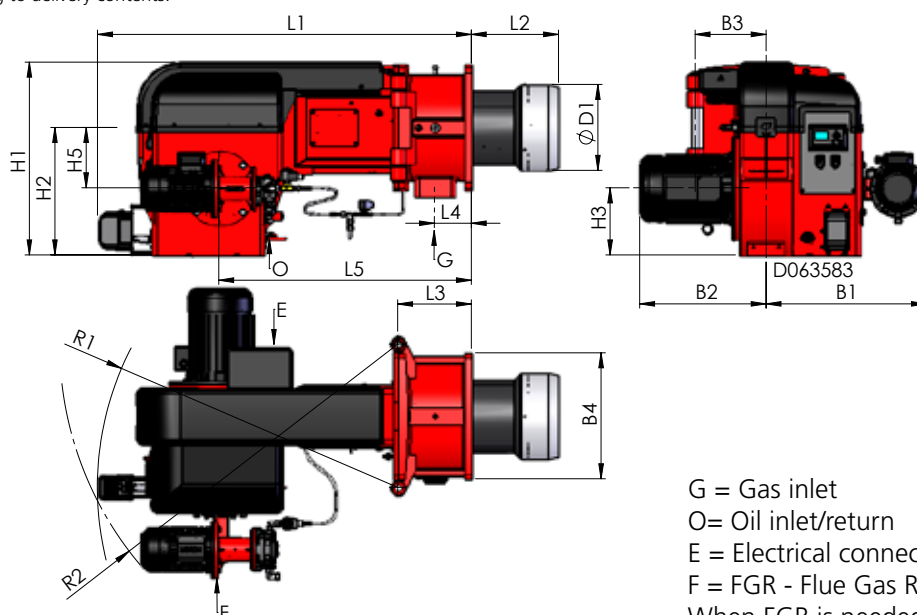



G = Gas inlet
O = Oil inlet/return
E = Electrical connection
F = FGR - Flue Gas Recirculation
When FGR is needed, oil pump unit will be relocated.

BURNER	L1	L2	L2		L3	L4	L5
			C1	C2			
GKP-140 M	50.59	8.66	-	-	10.24	5.08	34.65
GKP-150 M	50.59	9.06	-	-	10.24	5.08	34.65
GKP-250 M	51.97	11.81	-	-	10.24	5.12	35.04
GKP-280 M	51.97	12.28	-	-	10.24	5.12	35.04
GKP-140 M LN80	50.59	16.93	-	-	10.24	5.08	34.65
GKP-250 M LN80	51.97	-	16.54	21.65	10.24	5.12	35.04


BURNER	H1	H2	H3	H5	B1	B2	B3	B4	ØD1	R1	R2
GKP-140 M	24.61	15.75	8.27	7.68	16.93	22.44	8.27	14.17	9.45	41.34	45.28
GKP-150 M	24.61	15.75	8.27	7.68	16.93	22.44	8.27	14.17	10.63	41.34	45.28
GKP-250 M	26.57	17.56	9.25	8.46	18.31	23.82	9.84	17.32	10.63	43.31	47.24
GKP-280 M	26.57	17.56	9.25	8.46	18.31	23.82	9.84	17.32	11.81	43.31	47.24
GKP-140 M LN80	24.61	15.75	8.27	7.68	16.93	22.44	8.27	14.17	9.45	41.34	45.28
GKP-250 M LN80	26.57	17.56	9.25	8.46	18.31	23.82	9.84	17.32	10.08	43.31	47.24

Dimensions in inches.

Working Diagram

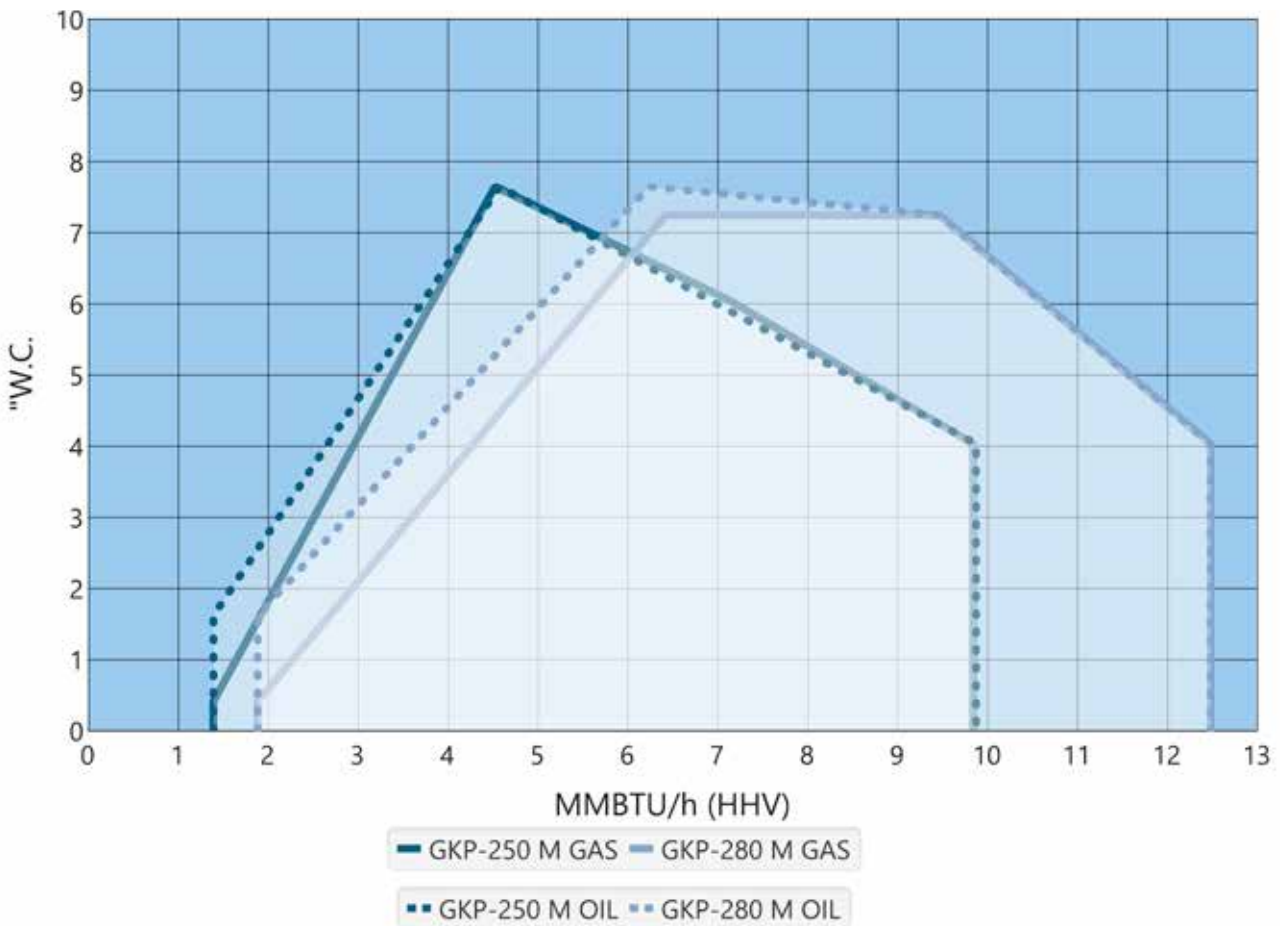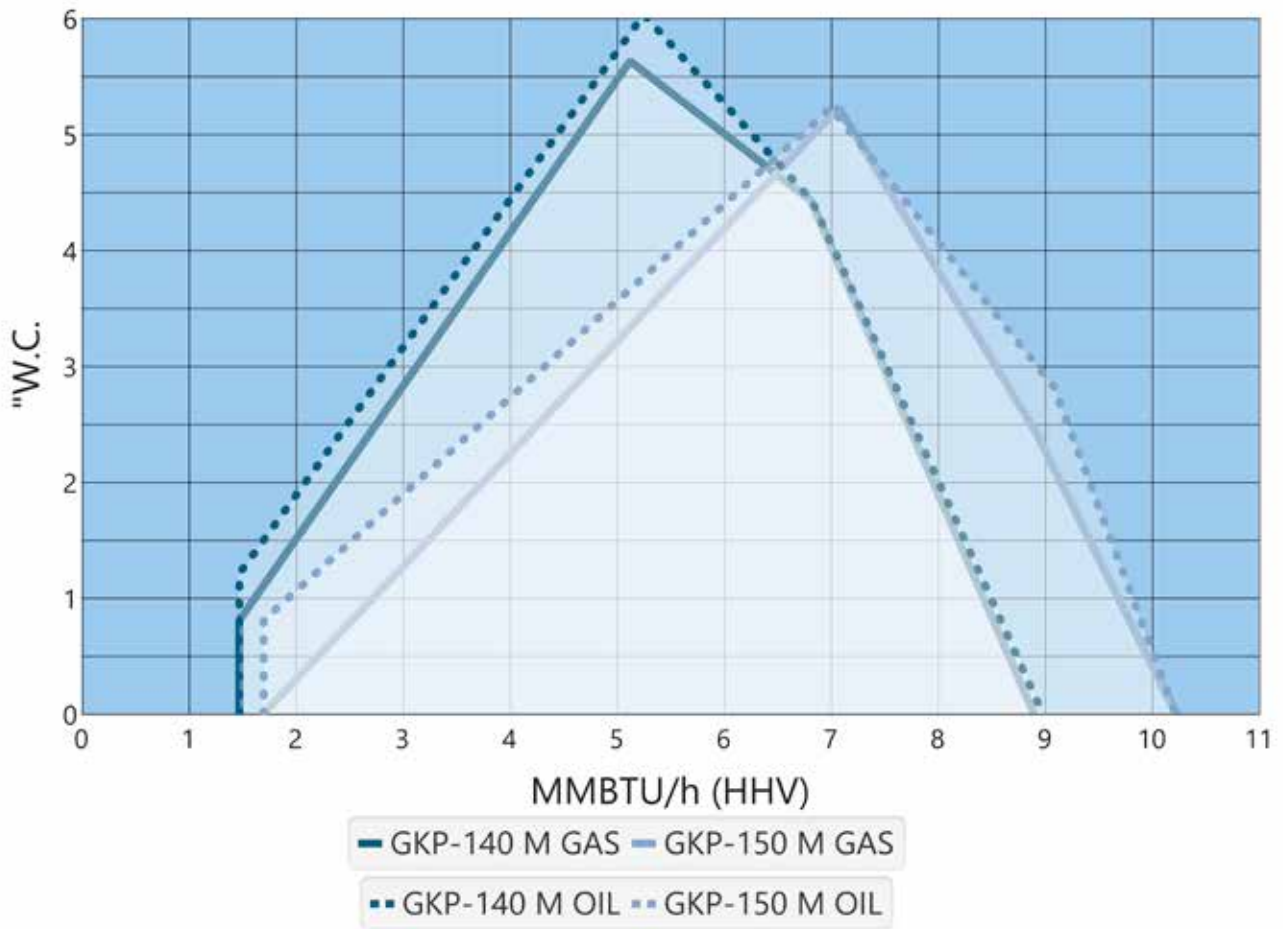

Working Diagram

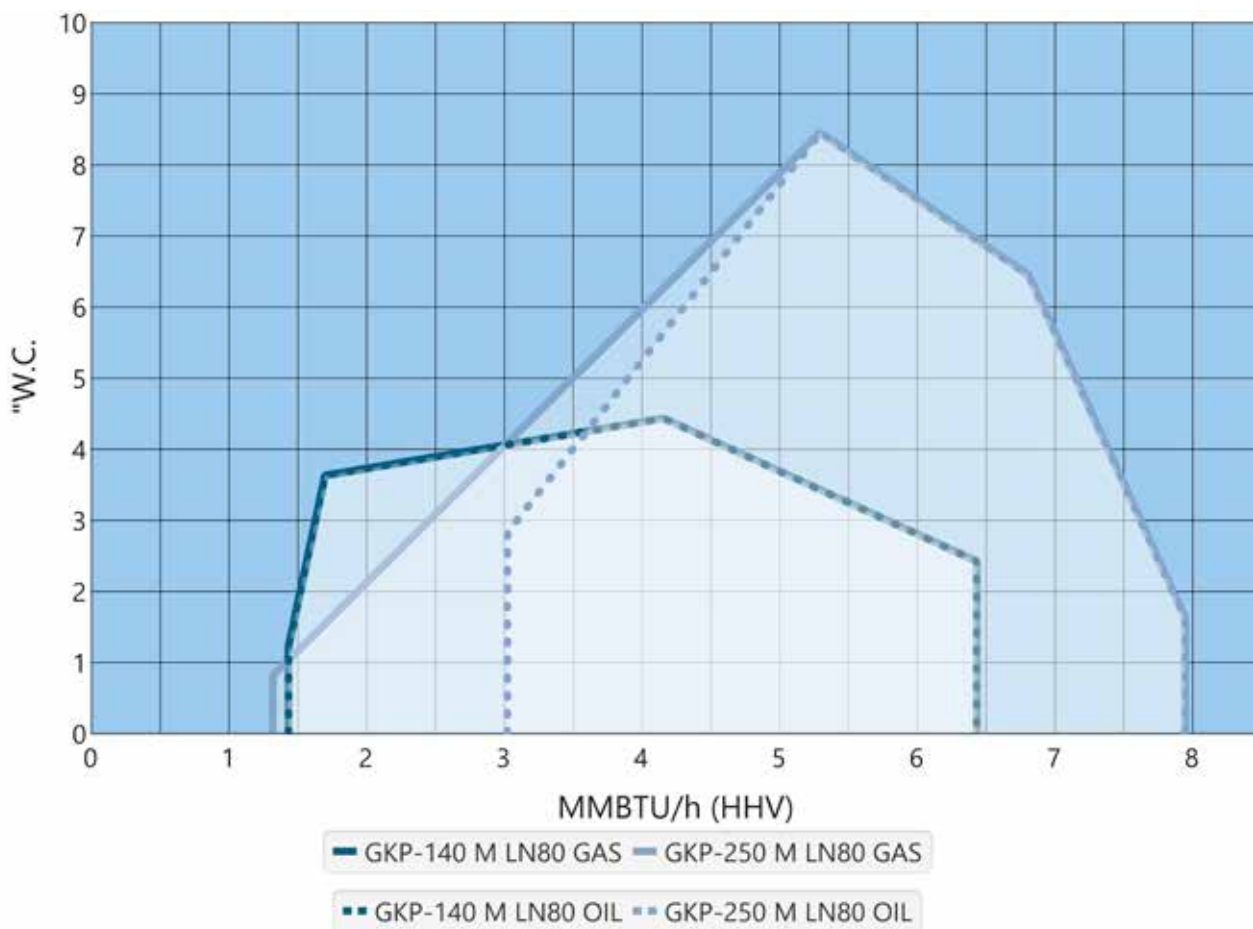

GKP-350/450 M, GKP-320/450 M LN80

Technical Data

BURNER	GKP-350 M	GKP-450 M	GKP-320 M LN80	GKP-450 M LN80
Capacity MMBtu/h gal/h	2.7 - 16.1 42.0 - 111.9	3.2 - 20.8 57.5 - 143.0	2.0 - 12.1 21.8 - 83.9	3.5 - 19.7 38.8 - 135.2
Burner motor 3~ 208-600 V 60 Hz				
Output hp	10	15	10	20
Current A/460 V	11.9	17.7	11.9	23.5
Speed rpm	3510	3510	3510	3510
Oil hose connection				
- suction	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT
- return	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT
Oil pump				
- Motor 3~ 208-600 V 60 Hz				
Output hp	2	2	2	2
Current A	2.8	2.8	2.8	2.8
Speed r/min	3510	3510	3510	3510
Control unit	WDx00	WDx00	WDx00	WDx00
Weight lb*	860	1113	871	1124

*) Only burner



LFO: 1 gal/h = 140 MBtu/h

Ratio level Gas 1:6 (100 - 16,6%)

Ratio level LFO 1:2,5 (100 - 40%)

Note! The weight varies according to delivery contents.

Dimensions

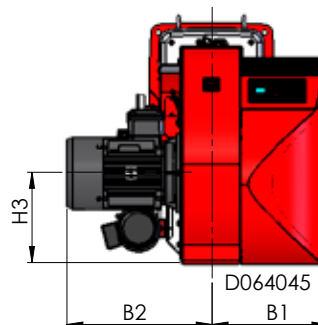
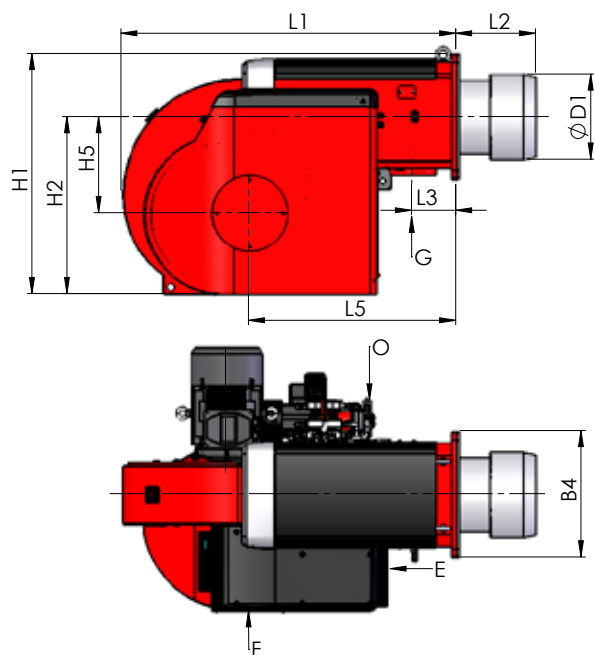


G = Gas inlet
O = Oil inlet/return
E = Electrical connection
F = FGR - Flue Gas Recirculation

BURNER	L1	L2	L3	L5	H1	H2	H3	H5	B1	B2	B4	ØD1
GKP-350 M	53.54	13.78	7.68	31.89	37.01	27.36	13.98	13.58	19.29	22.83	19.29	12.60
GKP-450 M	57.87	13.78	7.68	35.83	41.34	30.31	15.55	16.54	20.08	25.59	21.65	14.57
GKP-320 M LN80	53.54	19.69	7.68	31.89	37.01	27.36	13.98	13.58	19.29	22.83	19.29	11.89
GKP-450 M LN80	57.87	18.90	7.68	35.83	41.34	30.31	15.55	16.54	20.08	25.59	21.65	12.76

Dimensions in inches.

Working Diagram

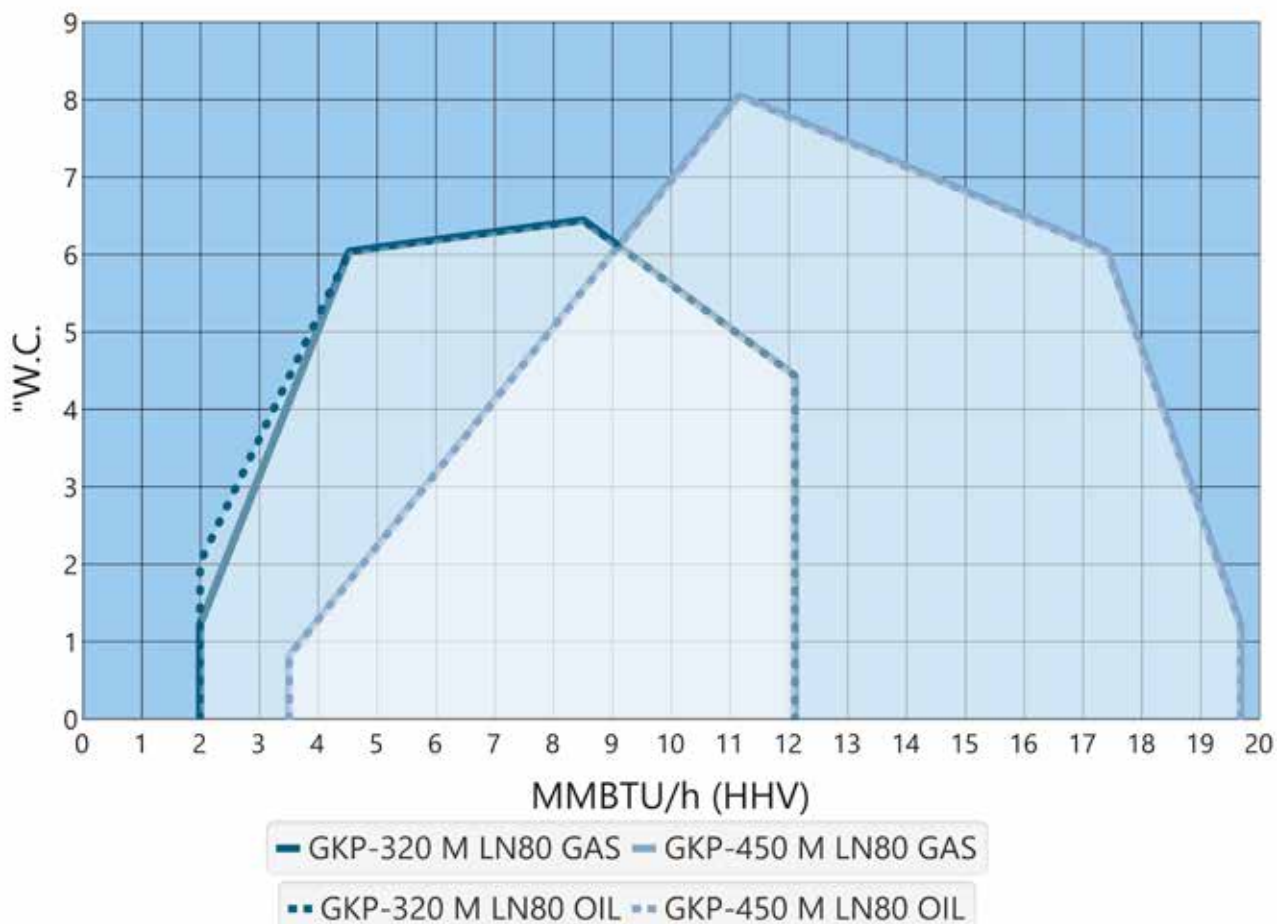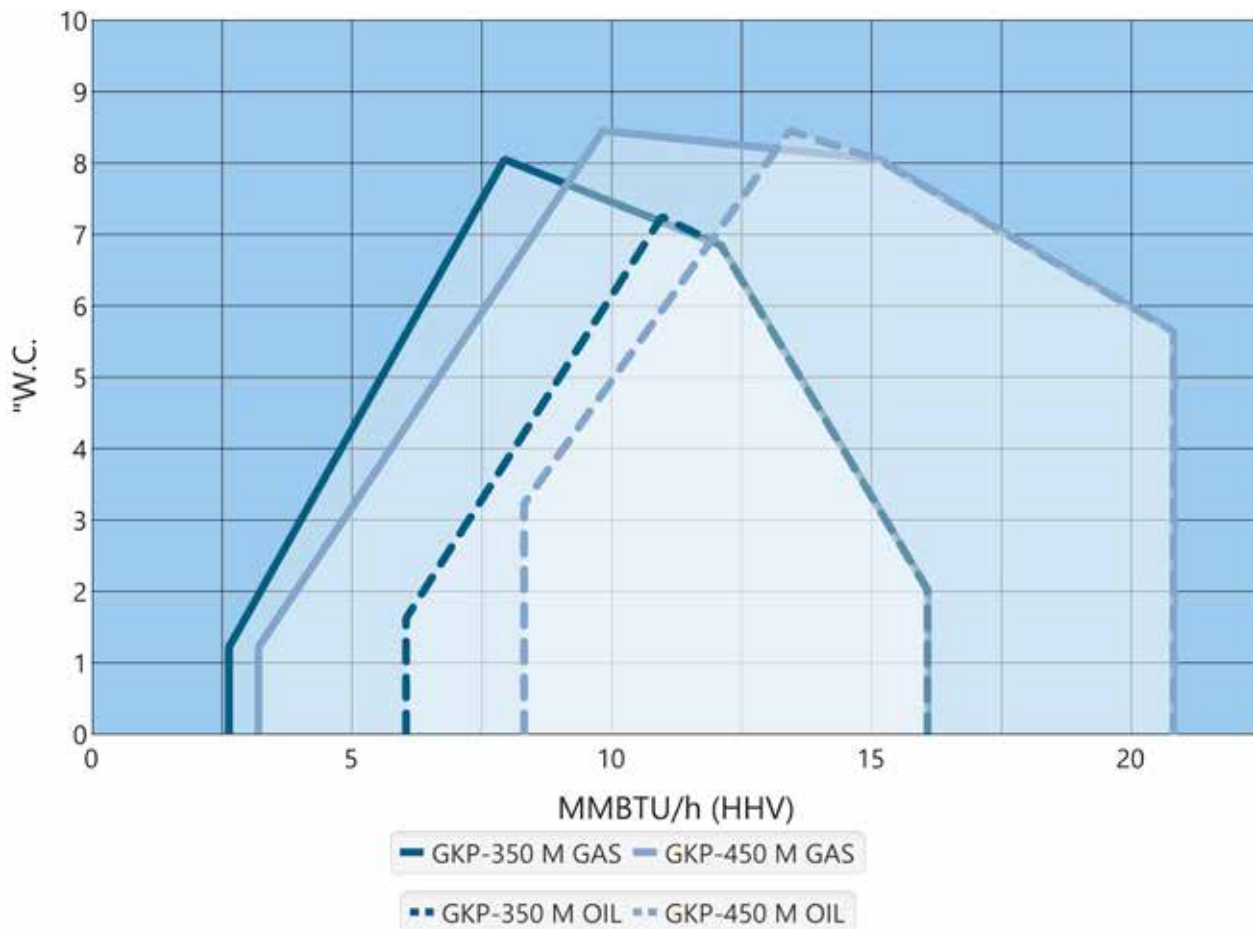

GKP-600 M...700 M-III

Technical Data

BURNER	GKP-600 M	GKP-700 M	GKP-700 M-II	GKP-700 M-III
Capacity MMBtu/h gal/h	3.7 - 25.6 37.3 - 177.1	4.5 - 31.8 52.8 - 220.7	5.1 - 36.0 55.9 - 255.2	5.7 - 39.8 71.5 - 269.8
Burner motor 3~ 208-600 V 60 Hz				+ frequency converter
Output hp	20	25	30	40
Current A/460 V	23.4	31	35.8	45
Speed rpm	3510	3510	3510	2970*
Oil hose connection				
- suction	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT
- return	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT
Oil pump				
- Motor 3~ 208-600 V 60 Hz				
Output hp	3	5.5	5.5	5.5
Current A/460 V	3.8	6.7	6.7	6.7
Speed rpm	3510	3510	3510	3510
Regulating valve	-	TV4001	TV4001	TV4001
Control unit	WDx00	WDx00	WDx00	WDx00
Weight lb**	1146	1246	1499	1510

*) The frequency must be converted to 50 Hz

***) Only burner


LFO: 1 gal/h = 140 MBtu/h

Ratio level Gas 1:6 (100 - 16,6%)

Ratio level LFO 1:2,5 (100 - 40%)

Note! The weight varies according to delivery contents.

Dimensions

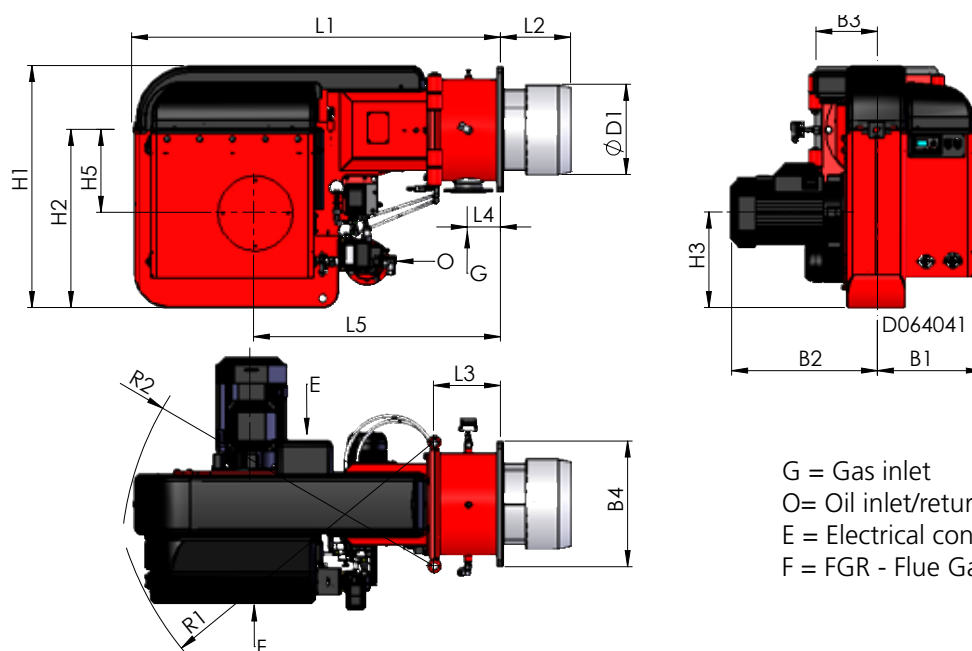



G = Gas inlet
O = Oil inlet/return
E = Electrical connection
F = FGR - Flue Gas Recirculation

BURNER	L1	L2	L3	L4	L5
GKP-600 M	64.96	12.20	11.61	5.71	42.91
GKP-700 M	64.96	12.20	11.61	5.71	42.91
GKP-700 M-II	64.96	12.20	11.61	5.71	42.91
GKP-700 M-III	64.96	15.75	11.61	5.71	42.91

BURNER	H1	H2	H3	H5	B1	B2	B3	B4	ØD1	R1	R2
GKP-600 M	41.73	30.71	16.54	14.37	18.31	25.39	10.63	21.65	14.57	56.69	55.12
GKP-700 M	41.73	30.71	16.54	14.37	20.28	27.56	10.63	21.65	15.55	57.48	55.12
GKP-700 M-II	41.73	30.71	16.54	14.37	20.28	29.92	10.63	21.65	15.55	57.48	55.12
GKP-700 M-III	41.73	30.71	16.54	14.37	20.28	33.27	10.63	21.65	16.73	57.48	55.12

Dimensions in inches.

Working Diagram

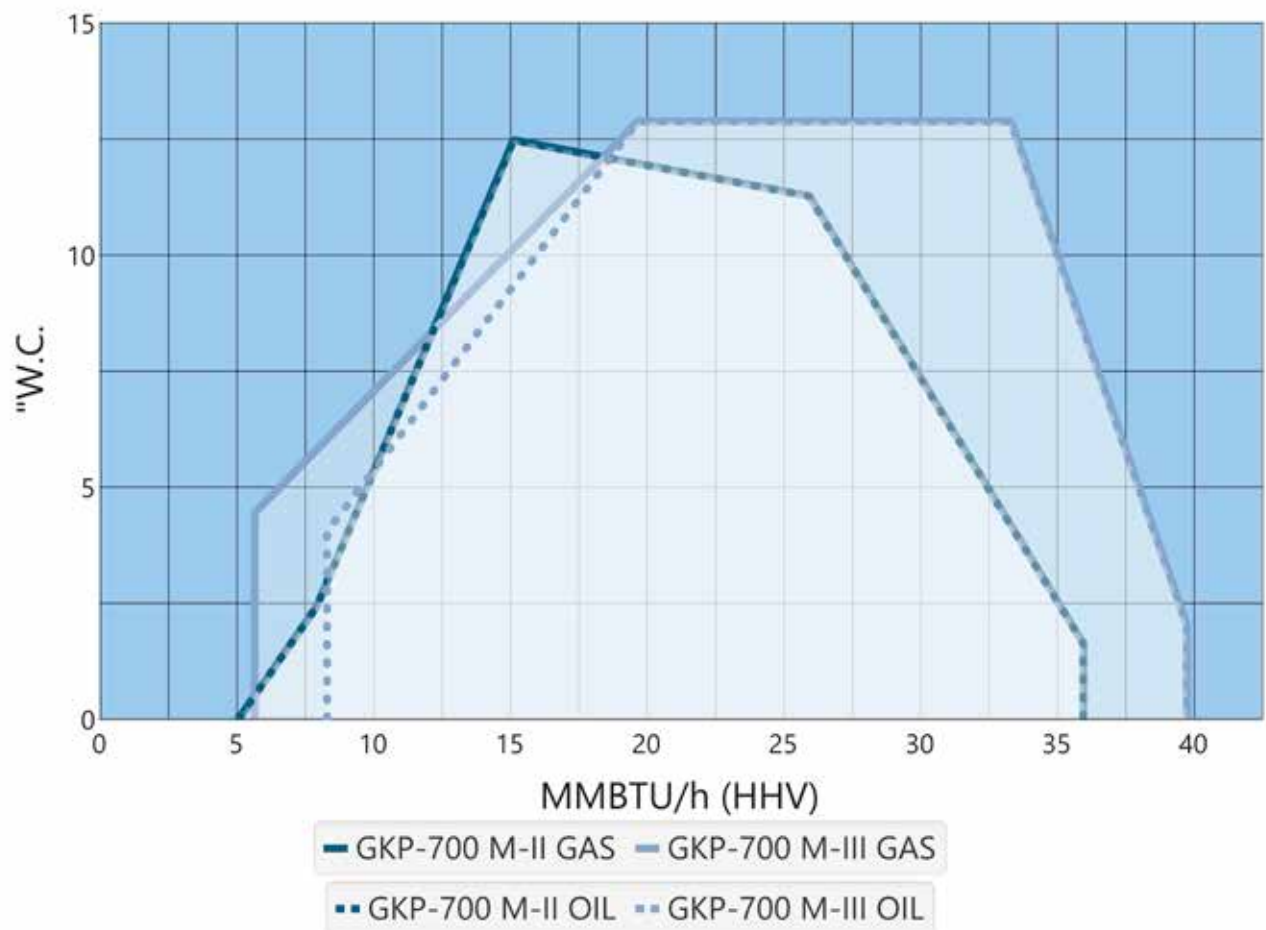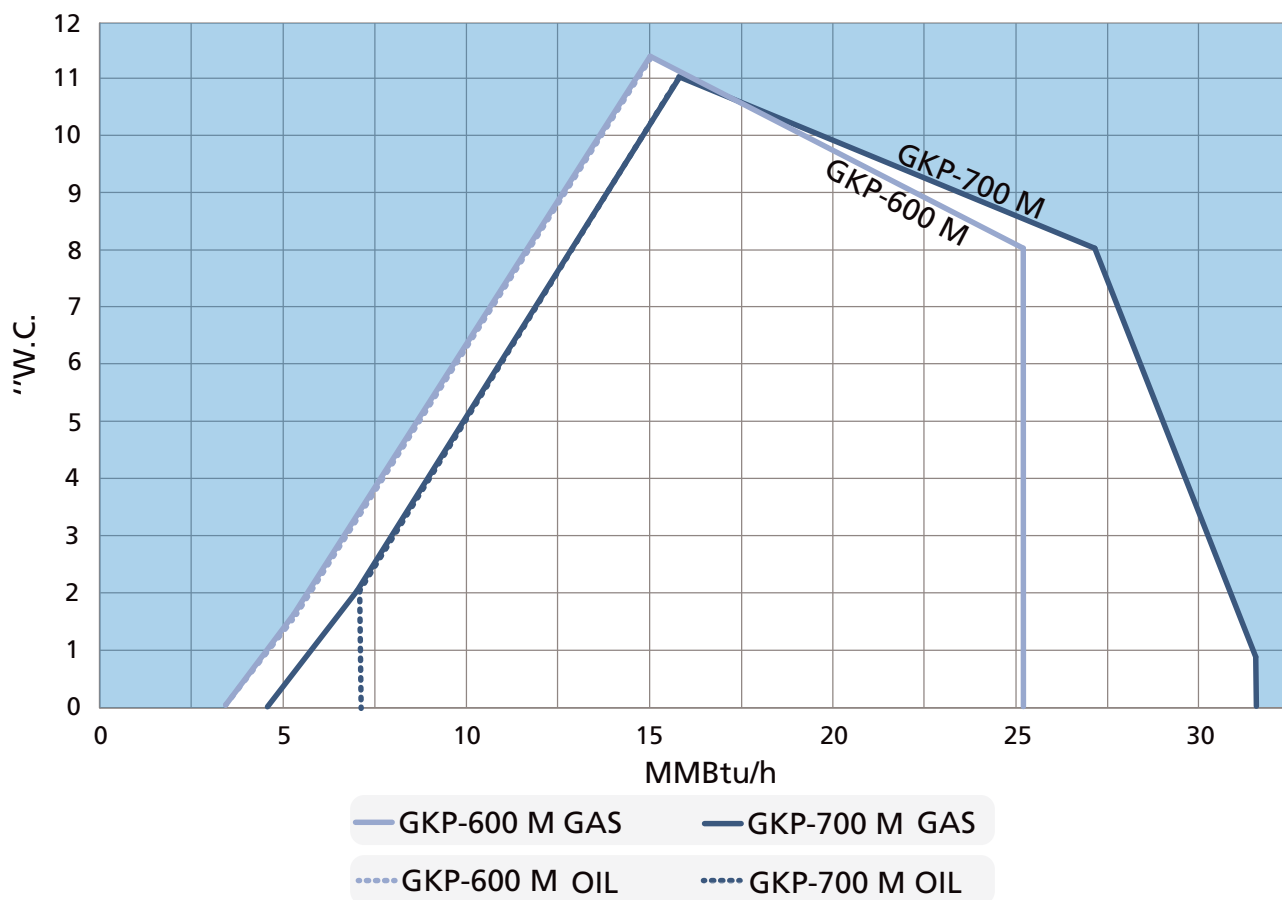

GKP-600 M...700 M

GKP-600 M LN80/ GKP-700 M-III LN80

Technical Data

BURNER	GKP-600 M LN80	GKP-700 M-II LN80	GKP-700 M-III LN80
Capacity MMBtu/h	3.8 - 24.4	4.5 - 28.8	6.3 - 33.3
gal/h	40.4 - 175.6	31.1 - 198.9	43.5 - 230.6
Burner motor			+ frequency converter
3~ 208-600 V 60 Hz			
Output hp	20	30	40
Current A/460 V	23.4	34	45
Speed rpm	3510	3510	2970*
Oil hose connection			
- suction	3/4" NPT	3/4" NPT	3/4" NPT
- return	3/4" NPT	3/4" NPT	3/4" NPT
Oil pump			
- Motor	TAR5	T4	T4
3~ 208-600 V 60 Hz			
Output hp	3	5.5	5.5
Current A/460 V	3.8	6.7	6.7
Speed rpm	3510	3510	3510
Regulating valve	-	TV4001	TV4001
Control unit	WDx00	WDx00	WDx00
Weight lb**	1378	1731	1775

*) The frequency must be converted to 50 Hz

***) Only burner


LFO: 1 gal/h = 140 MBtu/h

Ratio level Gas 1:6 (100 - 16,6%)

Ratio level LFO 1:2,5 (100 - 40%)

Note! The weight varies according to delivery contents.

Dimensions

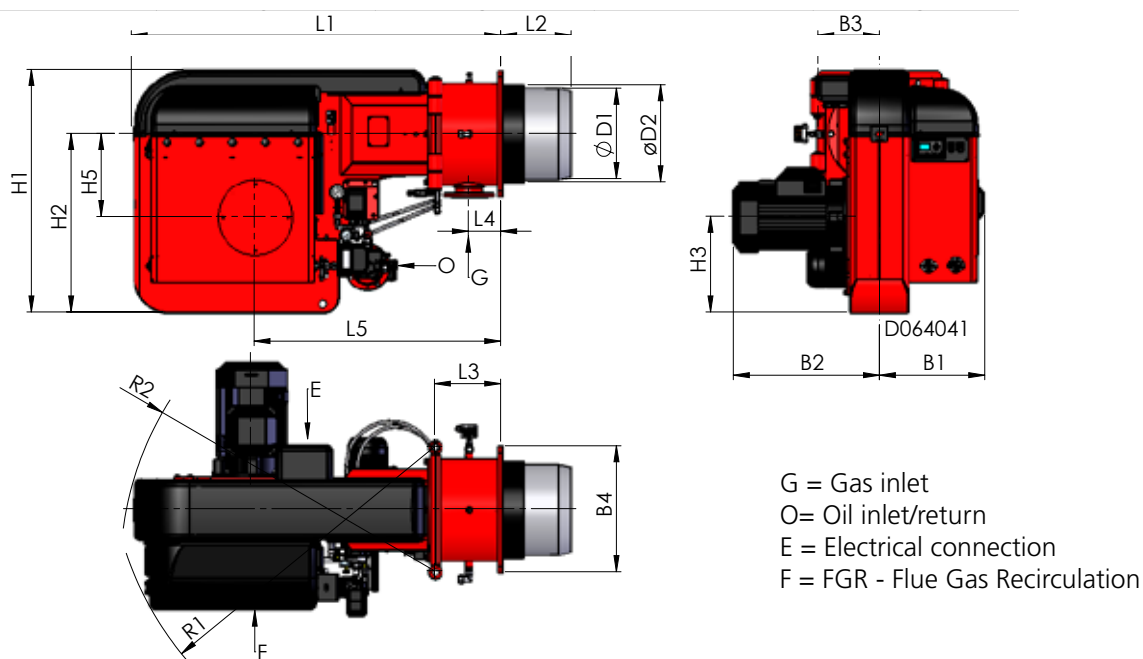


BURNER	L1	L2	L3	L4	L5
GKP-600 M LN80	64.96	20.87	11.61	5.71	42.91
GKP-700 M-II LN80	64.96	20.87	11.61	5.71	42.91
GKP-700 M-III LN80	64.96	24.02	11.61	5.71	42.91

BURNER	H1	H2	H3	H5	B1	B2	B3	B4	ØD1	ØD2	R1	R2
GKP-600 M LN80	41.73	30.71	16.54	14.37	18.31	25.39	10.63	21.65	15.12	-	56.69	55.12
GKP-700 M-II LN80	41.73	30.71	16.54	14.37	20.28	29.92	10.63	21.65	15.98	-	57.48	55.12
GKP-700 M-III LN80	41.73	30.71	16.54	14.37	20.28	33.27	10.63	21.65	15.98	-	57.48	55.12

Dimensions in inches.

Working Diagram

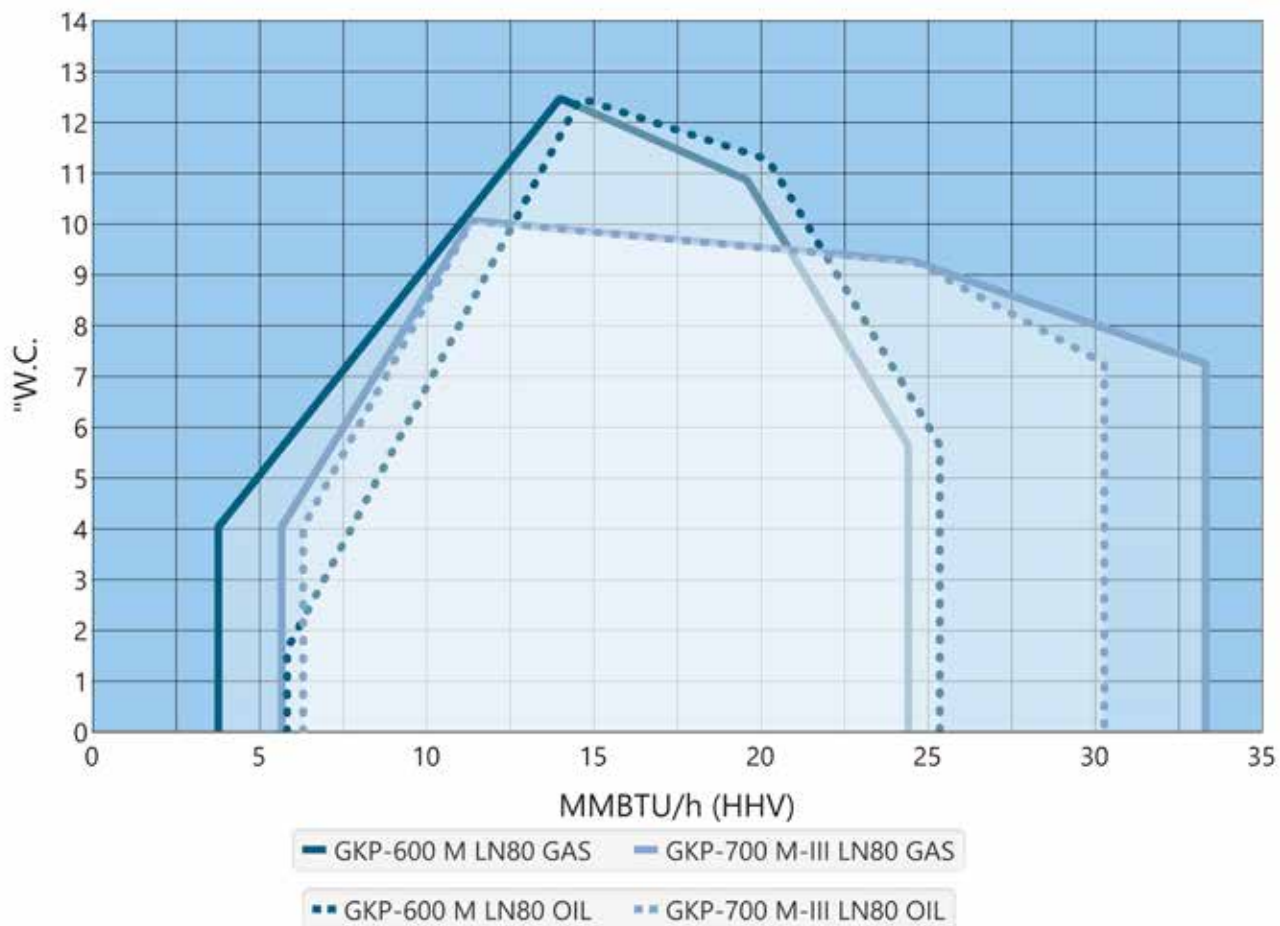

GKP-1000/1200 M

Technical Data

BURNER	GKP-1000 M	GKP-1200 M
Capacity MMBtu/h	6.8 - 42.0	8.3 - 50.4
gal/h	47.2 - 290.6	57.5 - 348.1
Burner motor	+ frequency converter	+ frequency converter
3~ 208-600 V 60 Hz		
Output hp	50	60
Current A/460 V	55.9	66.7
Speed rpm*	2970	2970
Oil pipe connections	2 x Ø 22 mm	2 x Ø 22 mm
Control unit	WDx00	WDx00
Weight lb**	1720	1830

*) The frequency must be converted to 50 Hz

***) Only burner


LFO: 1 gal/h = 140 MBtu/h

Ratio level Gas 1:5 (100 - 20%)

Ratio level LFO 1:3 (100 - 33,3%)

Note! The weight varies according to delivery contents.


Dimensions

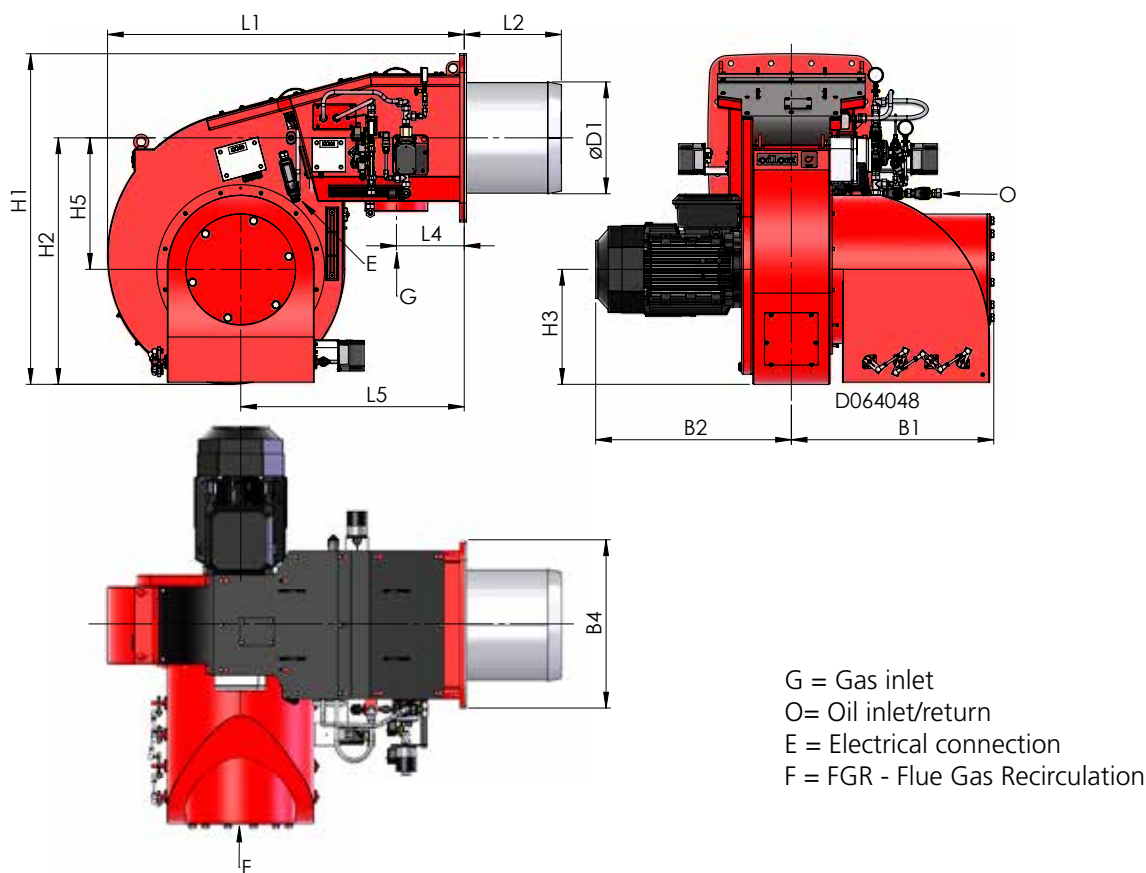

BURNER	L1	L2	L4	L5	H1	H2	H3	H5	B1	B2	B4	ØD1
GKP-1000 M	62.99	17.09	11.93	39.37	57.87	43.31	20.08	23.03	35.63	34.65	29.53	19.53
GKP-1200 M	62.99	17.09	11.93	39.37	57.87	43.31	20.08	23.03	35.63	36.61	29.53	20.47

Dimensions in inches.

Working Diagram

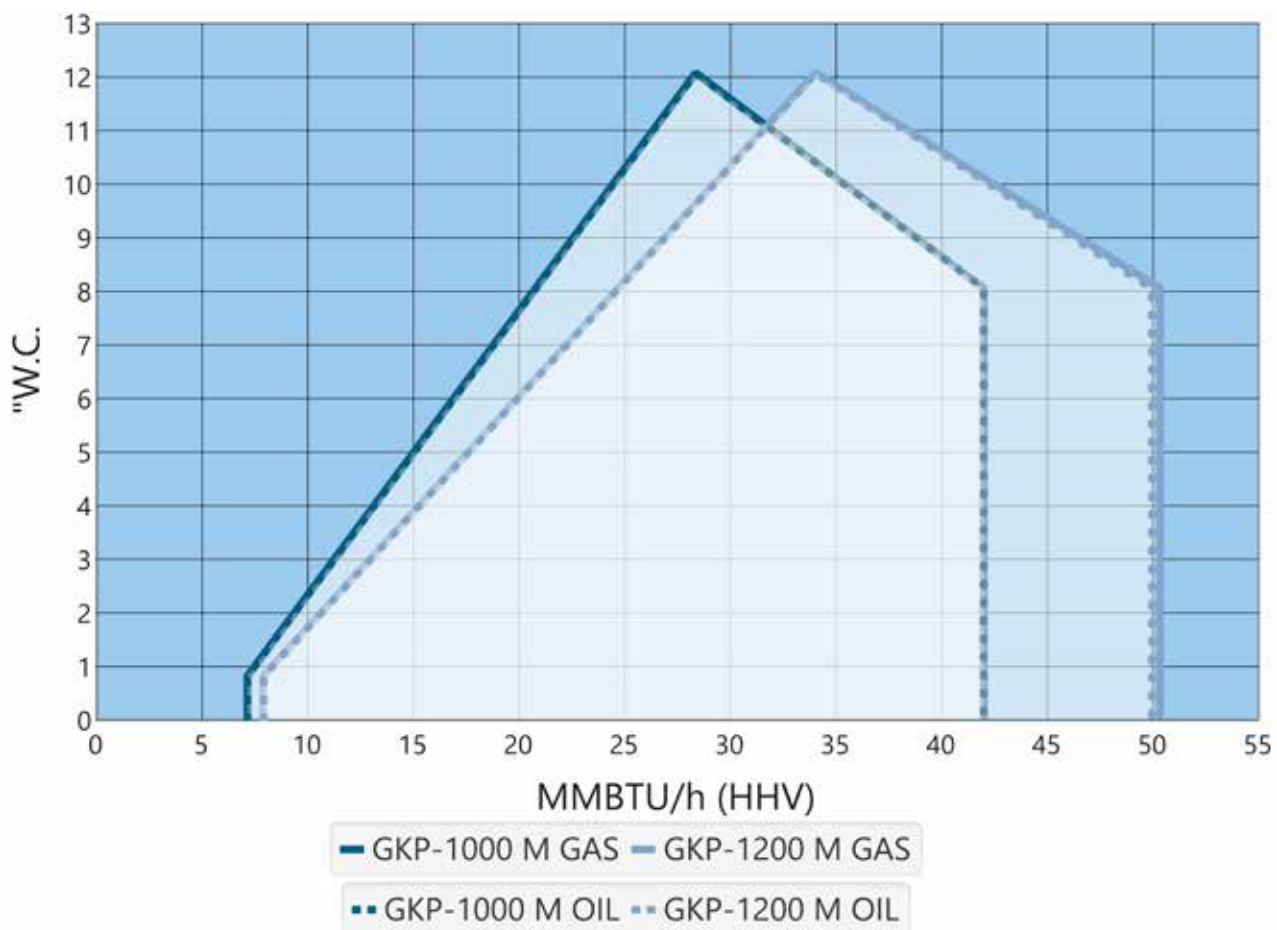

Scope of Delivery GKP-140...1200

	140...280	320...450	500...700	1000...1200
Hinge flange with limit switch	x	-	x	-
Burner flange gasket	x	x	x	x
WiseDrive (electronic ratio control)	x	x	x	x
Ignition transformer	x	x	x	x
Ignition cables and electrodes	x	x	x	x
Flame sensor	x	x	x	x
Inbuilt combustion air fan	x	x	x	x
Air damper with servomotor	x	x	x	x
Gas damper with servomotor	x	x	x	x
Gas nozzle	x	x	x	x
Connection for measuring the pressure in gas nozzle	x	x	x	x
Gas pressure switch, max.	x	x	x	x
Differential air pressure switch	x	x	x	x
Double solenoid valve for gas	x	x	x	x
Pressure switch for gas, min.	x	x	x	x
Automatic valve leak testing for gas	x	x	x	x
Pressure regulation valve for gas	x	x	x	x
Ignition gas valve*	x	x	x	x
Oil nozzle	x	x	x	x
Solenoid valves for oil	x	x	x	x
Oil pump with pressure regulation valve	x	x	x	-
Oil regulating valve with servomotor	x	x	x	x
Separate motor for oil pump	x	x	x	x
Pressure gauge/gauges for oil	x	x	x	x
Pressure switch for return oil	x	x	x	x
2 oil hoses, 78.7 inches	o	o	o	o
Oil filter	x	x	x	**
Deaerator	o	o	o	-
LPG gas nozzle	o	o	o	o
FGR	o	o	o	o
Gas pressure gauge	o	o	o	o
Turbo combustion head	o	o	o	o
Fan motor speed sensor	o	o	o	o
Frequency converter	o	o	o***	x
O ₂ control	o	o	o	o
O ₂ +CO control	-	-	-	-
Pressure gauge for monitoring of inlet oil pressure	o	o	o	o
Pressure switch for monitoring of inlet oil pressure	o	o	o	o
Combustion head optimizer with servomotor	-	-	o	-
Pressure gauge for fan pressure	o	o	o	o
Manual	x	x	x	x

x Standard

o Option

*)Always in LN80 burners

***) Separate booster unit PKYK

***) Included in -700 M-III

Light Fuel Oil Burners

KP-350/450 M

Technical Data




BURNER	KP-350 M	KP-450 M
Capacity gal/h	42.0 - 111.9	57.5 - 143.0
Burner motor 3~ 208-600 V 60 Hz		
Output hp	10	15
Current A/460 V	11.9	17.7
Speed rpm	3510	3510
Oil hose connection - suction	3/4" NPT	3/4" NPT
- return	3/4" NPT	3/4" NPT
Oil pump - Motor 3~ 208-600 V 60 Hz	TAR4	TAR4
Output hp	2	2
Current A/460 V	2.8	2.8
Speed rpm	3510	3510
Control unit	WDx00	WDx00
Weight lb*	750	1036

*) Only burner

Ratio level LFO 1:2,5 (100 - 40%)

Note! The weight varies according to delivery contents.

Dimensions

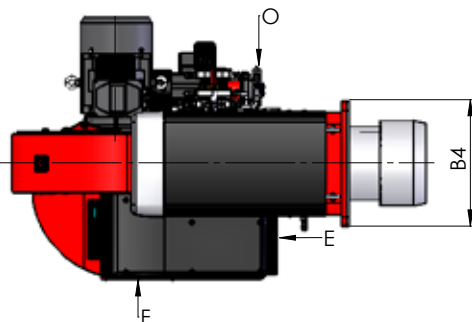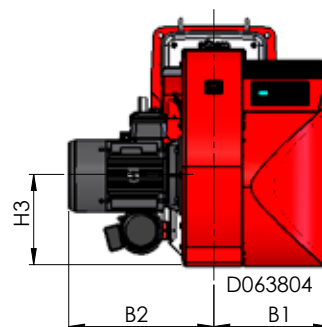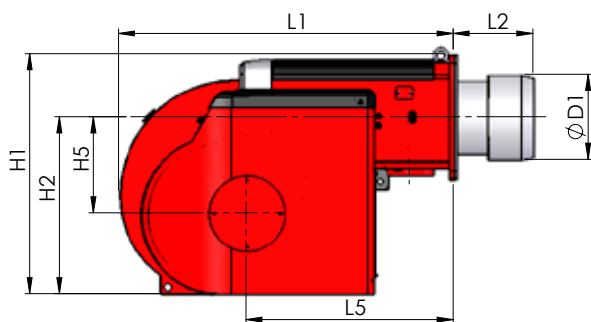


O= Oil inlet/return
E = Electrical connection
F = FGR - Flue Gas Recirculation

BURNER	L1	L2	L5	H1	H2	H3	H5	B1	B2	B4	ØD1
KP-350 M	53.54	13.78	31.89	37.01	27.36	13.98	13.58	19.29	20.87	19.29	12.60
KP-450 M	57.87	13.78	35.83	41.34	30.31	15.55	16.54	20.08	25.59	21.65	14.57

Dimensions in inches.

Working Diagram

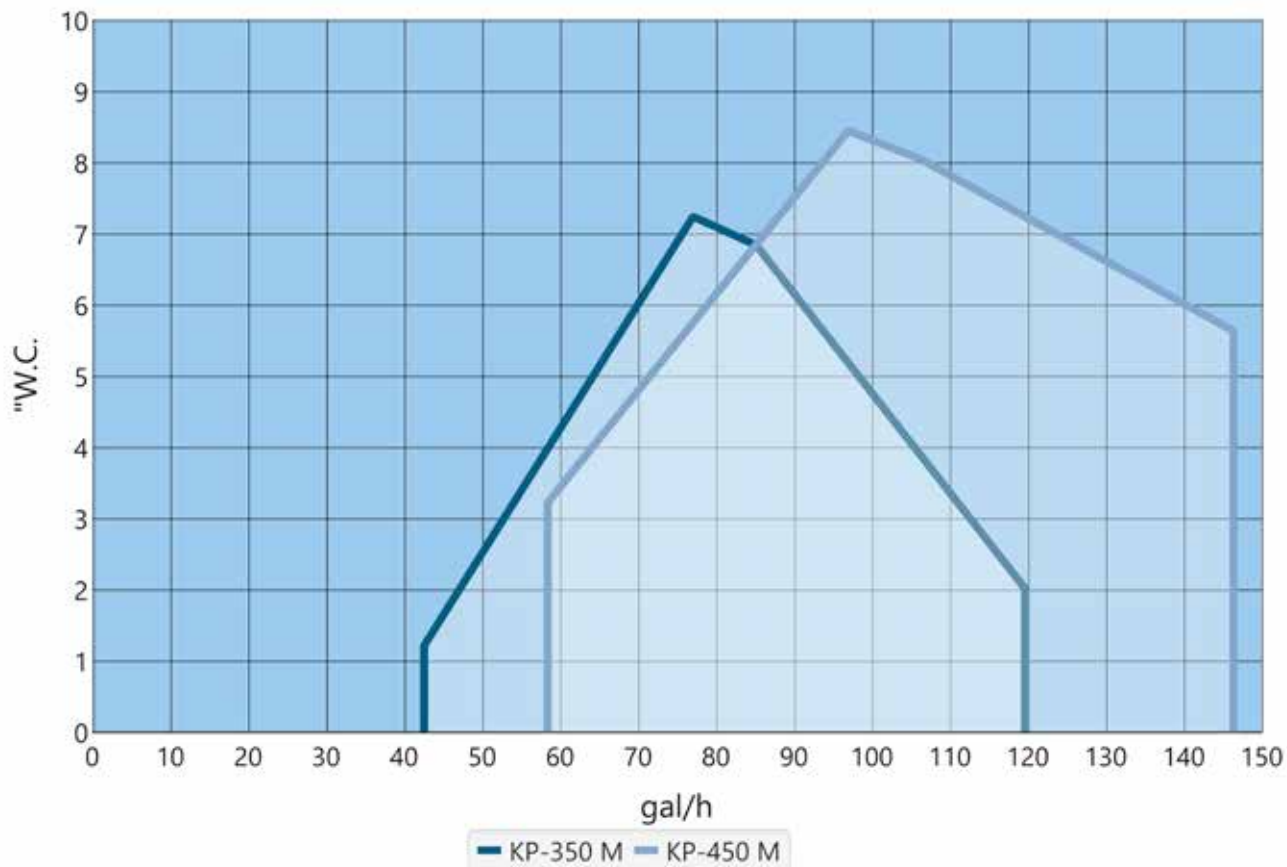

Scope of Delivery KP-350...450

	350...450
Hinge flange with limit switch	-
Burner flange gasket	x
WiseDrive (electronic ratio control)	x
Ignition transformer	x
Ignition cables and electrodes	x
Flame sensor	x
Inbuilt combustion air fan	x
Air damper with servomotor	x
Oil nozzle	x
Solenoid valves for oil	x
Oil pump with pressure regulation valve	x
Oil regulating valve with servomotor	x
Separate motor for oil pump	x
Pressure gauge/gauges for oil	x
Pressure switch for return oil	x
2 oil hoses, 78.7 inches	x
Oil filter	x
Deaerator	o
FGR	o
Turbo combustion head	o
Fan motor speed sensor	o
Frequency converter	o
O ₂ control	o
O ₂ +CO control	-
Pressure gauge for monitoring of inlet oil pressure	o
Pressure switch for monitoring of inlet oil pressure	o
Combustion head optimizer with servomotor	-
Pressure gauge for fan pressure	o
Manual	x


x Standard

o Option

*) Separate booster unit PKYK

PI Diagrams

GAS, VGD VALVE, M BURNERS

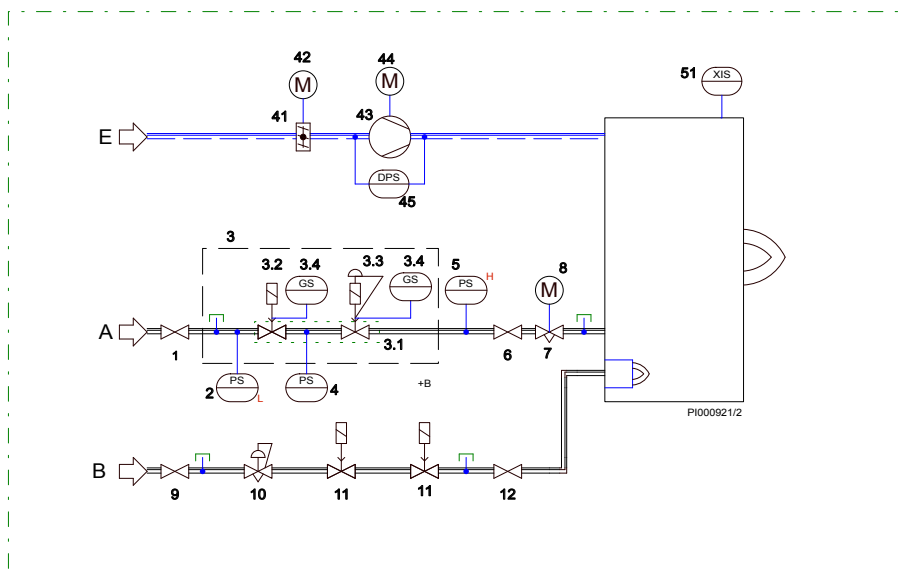


GAS PROCESS COMPONENTS

1. Manual shut-off valve
2. Pressure switch, low
3. Safety shut-off valve
 - 3.1 Valve
 - 3.2 Actuator
 - 3.3 Actuator with pressure regulator
 - 3.4 Proof of closure switch
4. Pressure switch
5. Pressure switch, high
6. Manual shut-off valve
7. Gas butterfly valve
8. Servomotor
9. Manual shut-off valve
10. Pressure regulator
11. Safety shut-off valve
12. Manual shut-off valve

OIL PROCESS COMPONENTS

21. Manual shut-off valve
22. Filter
23. Oil pump
 - 23.1 Oil pump
 - 23.2 Oil regulation valve
24. Electric motor
25. Pressure switch, low
26. Gauge valve
27. Pressure gauge
28. Safety shut-off valve
 - 28.1 Proof of closure switch
29. Solenoid valve, ignition oil
30. Oil regulator valve
31. Servomotor
32. Pressure switch, high
33. Non-return valve
34. Shut-off valve

GAS, VGD VALVE, M LN 60 BURNERS

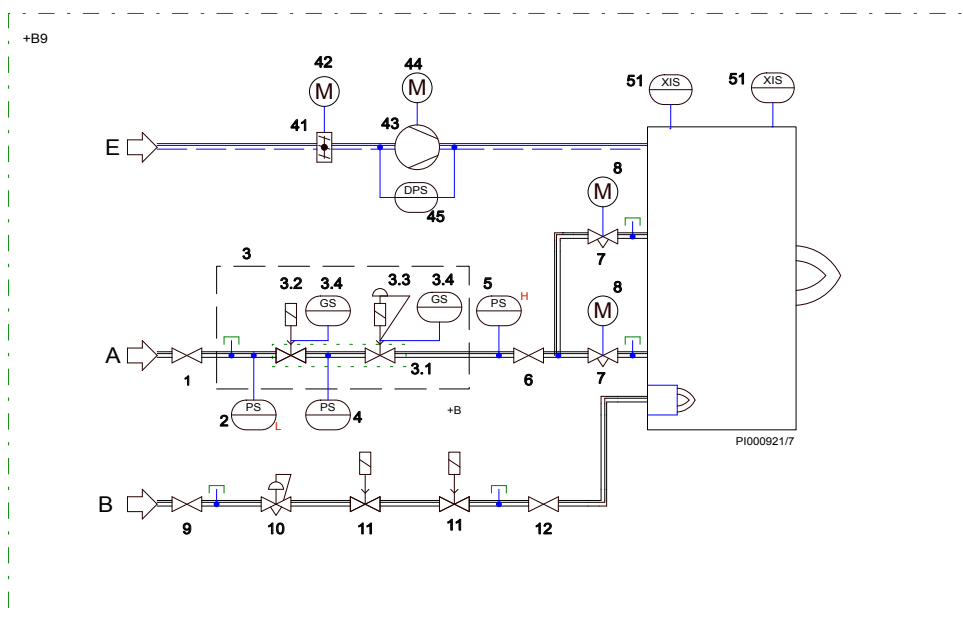

AIR PROCESS COMPONENTS


41. Air damper
42. Servomotor
43. Combustion air fan
44. Electric motor
45. Differential pressure switch for air, not for KP-models

OTHER COMPONENTS:

51. Flame detector

- A = Gas supply
 B = Ignition gas supply
 C = Oil supply
 D = Oil return
 E = Air supply

LIGHT FUEL OIL, 140...280 M BURNERS

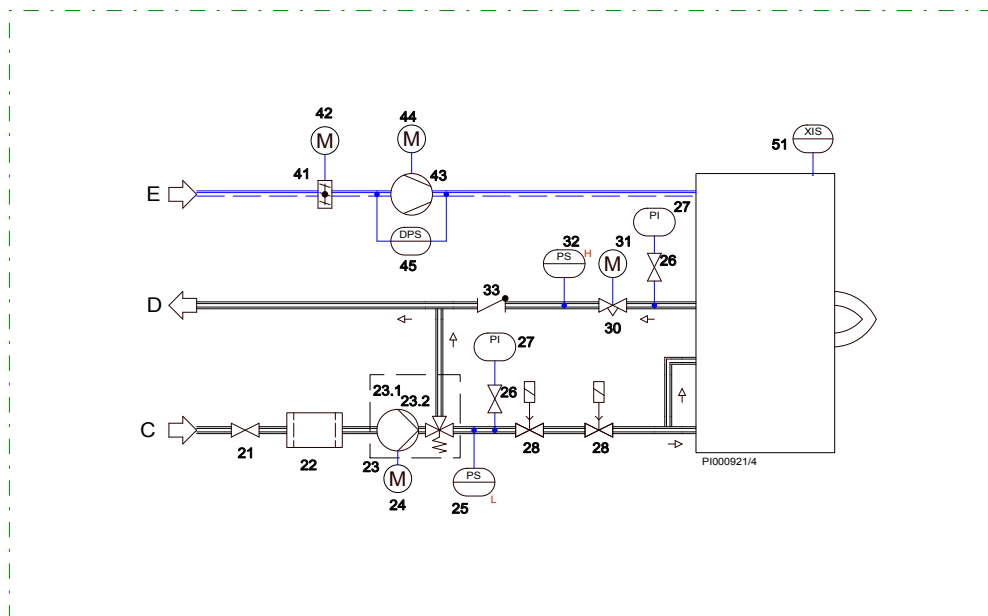


GAS PROCESS COMPONENTS

1. Manual shut-off valve
2. Pressure switch, low
3. Safety shut-off valve
- 3.1 Valve
- 3.2 Actuator
- 3.3 Actuator with pressure regulator
- 3.4 Proof of closure switch
4. Pressure switch
5. Pressure switch, high
6. Manual shut-off valve
7. Gas butterfly valve
8. Servomotor
9. Manual shut-off valve
10. Pressure regulator
11. Safety shut-off valve
12. Manual shut-off valve

OIL PROCESS COMPONENTS

21. Manual shut-off valve
22. Filter
23. Oil pump
- 23.1 Oil pump
- 23.2 Oil regulation valve
24. Electric motor
25. Pressure switch, low
26. Gauge valve
27. Pressure gauge
28. Safety shut-off valve
- 28.1 Proof of closure switch
29. Solenoid valve, ignition oil
30. Oil regulator valve
31. Servomotor
32. Pressure switch, high
33. Non-return valve
34. Shut-off valve

LIGHT FUEL OIL, 350...700 M BURNERS

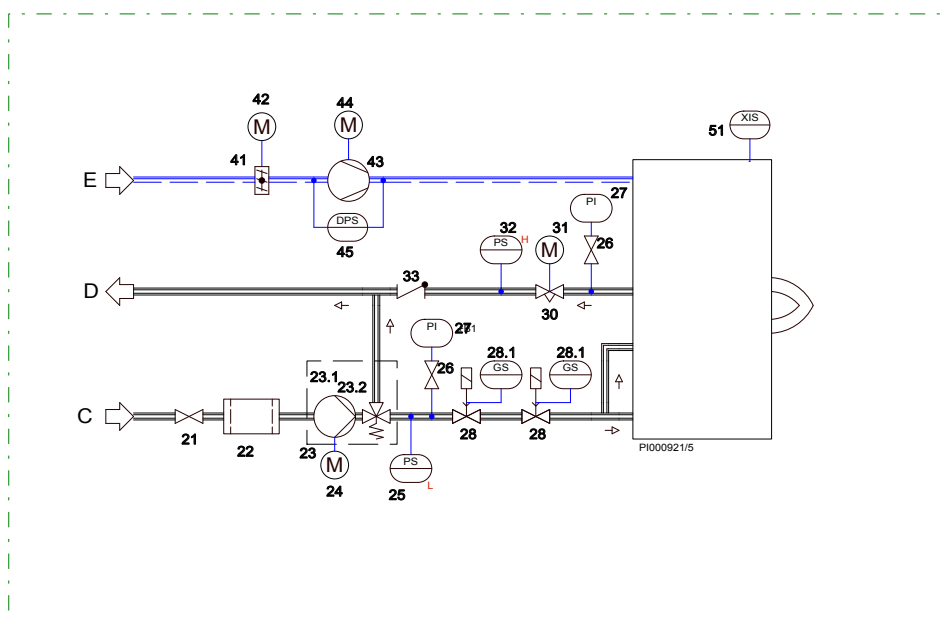

AIR PROCESS COMPONENTS


41. Air damper
42. Servomotor
43. Combustion air fan
44. Electric motor
45. Differential pressure switch for air, not for KP-models

OTHER COMPONENTS:

51. Flame detector

- A = Gas supply
 B = Ignition gas supply
 C = Oil supply
 D = Oil return
 E = Air supply

LIGHT FUEL OIL, 1000/1200 M BURNERS

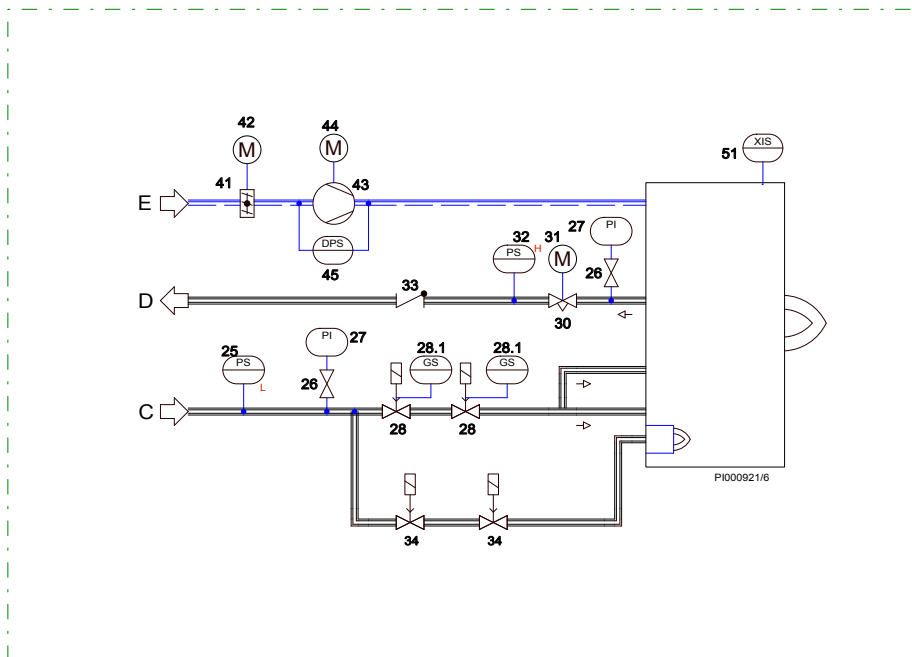

GAS PROCESS COMPONENTS

1. Manual shut-off valve
2. Pressure switch, low
3. Safety shut-off valve
- 3.1 Valve
- 3.2 Actuator
- 3.3 Actuator with pressure regulator
- 3.4 Proof of closure switch
4. Pressure switch
5. Pressure switch, high
6. Manual shut-off valve
7. Gas butterfly valve
8. Servomotor
9. Manual shut-off valve
10. Pressure regulator
11. Safety shut-off valve
12. Manual shut-off valve

OIL PROCESS COMPONENTS

21. Manual shut-off valve
22. Filter
23. Oil pump
- 23.1 Oil pump
- 23.2 Oil regulation valve
24. Electric motor
25. Pressure switch, low
26. Gauge valve
27. Pressure gauge
28. Safety shut-off valve
- 28.1 Proof of closure switch
29. Solenoid valve, ignition oil
30. Oil regulator valve
31. Servomotor
32. Pressure switch, high
33. Non-return valve
34. Shut-off valve

AIR PROCESS COMPONENTS

41. Air damper
42. Servomotor
43. Combustion air fan
44. Electric motor
45. Differential pressure switch for air, not for KP-models


OTHER COMPONENTS:

51. Flame detector


- A = Gas supply
 B = Ignition gas supply
 C = Oil supply
 D = Oil return
 E = Air supply

Combustion head and masonry dimensions

Mounting plate

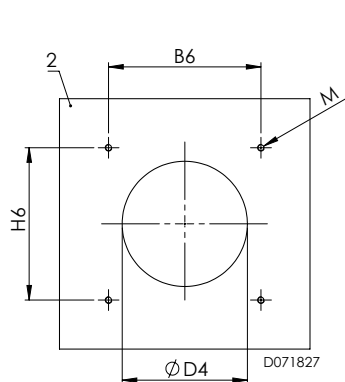

140...-700 M-III

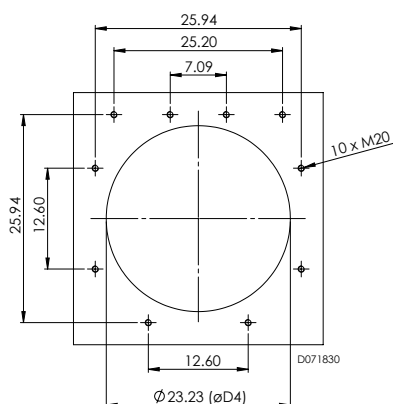


1000/1200


Dimensions in inches.

Burner mounting

Standard burner

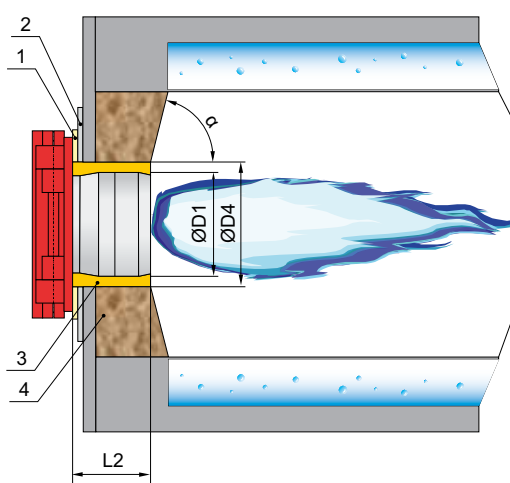

Low NOx burner LN60/LN80

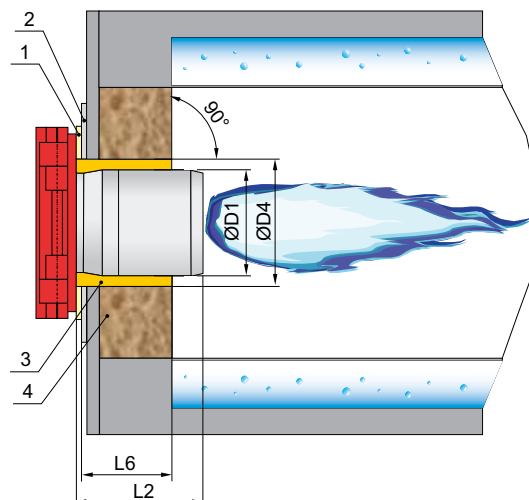

1. Gasket, thickness 0.31 inches
2. Mounting plate
3. Ceramic wool or equivalent
4. Masonry

Standard combustion head mounting dimensions

BURNER SERIE	B6	H6	ØD4	M	ØD1	L2	α
GP/GKP/KP-140 M/MH	10.83	10.83	10.63	4xM16	9.45	8.66	60° - 90°
GP/GKP/KP-150 M/MH	10.83	10.83	11.81	4xM16	10.63	9.06	60° - 90°
KP-250 M	14.37	14.37	11.81	4xM16	10.63	11.81	60° - 90°
GP/GKP-250 M/MH	14.37	14.37	11.81	4xM16	10.63	11.81	60° - 90°
KP-280 M	14.37	14.37	12.99	4xM16	11.81	12.28	60° - 90°
GP/GKP-280 M/MH	14.37	14.37	12.99	4xM16	11.81	12.28	60° - 90°
GP/GKP/KP-350 M	15.75	15.75	14.96	4xM20	12.60	13.78	60° - 90°
GP/GKP/KP-450 M	18.31	18.31	17.32	4xM20	14.57	13.78	60° - 90°
GP/GKP-600 M	18.31	18.31	17.32	4xM20	14.57	12.20	60° - 90°
KP-600 M	18.31	18.31	16.93	4xM20	14.57	11.22	60° - 90°
GP/GKP-700 M	18.31	18.31	17.91	4xM20	15.55	12.20	60° - 90°
KP-700 M	18.31	18.31	17.91	4xM20	15.55	12.20	60° - 90°
GP/GKP-700 M-II	18.31	18.31	17.91	4xM20	15.55	12.20	60° - 90°
KP-700 M-II	18.31	18.31	17.91	4xM20	15.55	12.20	60° - 90°
GP/GKP-700 M-III	18.31	18.31	18.90	4xM20	16.73	15.75	60° - 90°
GP/GKP-1000 M	See figure mounting plate 1000/1200				19.53	17.09	60° - 90°
GP/GKP-1200 M	See figure mounting plate 1000/1200				20.47	17.09	60° - 90°

Dimensions in inches.


Low NOx combustion head mounting dimensions, LN60/LN80

There are 1-2 combustion head length options (C1, C2) for each burner model. Choose correct combustion head length according to the boiler front wall thickness (L6). The front wall thicknesses are labeled in ranges with corresponding combustion head lengths (L2) in the table below.

BURNER SERIE	B6	H6	ØD4	M	ØD1	L2		L6	
						C1	C2	C1	C2
GP/GKP-140 M LN80	10.83	10.83	10.63	4xM16	9.45	-	16.93	-	9.44-14.96
GP/GKP-250 M LN80	14.37	14.37	11.42	4xM16	10.08	16.54	21.65	9.45-14.37	14.37-19.49
GP-280 M LN80	14.37	14.37	12.20	4xM16	10.87	16.54	21.65	9.45-14.37	14.37-19.49
GP/GKP-320 M LN80	15.75	15.75	14.17	4xM20	11.89	-	19.69	-	10.24-17.32
GP-350 M LN80	15.75	15.75	14.96	4xM20	12.76	-	18.90	-	10.24-17.32
GP/GKP-450 M LN80	18.31	18.31	14.96	4xM20	12.76	-	18.90	-	10.24-17.32
GP/GKP-600 M LN80	18.31	18.31	17.91	4xM20	15.12	-	20.87	-	10.24-17.32
GP/GKP-700 M-II LN80	18.31	18.31	17.91	4xM20	15.98	-	20.87	-	10.24-17.32
GP/GKP-700 M-III LN80	18.31	18.31	17.56	4xM20	15.98	-	24.02	-	11.42-21.06
GP-600 M LN60	18.31	18.31	16.54	4xM20	16.06	-	20.87	-	10.24-17.68
GP-700 M-III LN60	18.31	18.31	19.76	4xM20	16.54	-	24.02	-	11.42-20.55
GP-1000 LN80	See figure mounting plate 1000/1200				17.87	-	25.59	-	11.42-22.44

Dimensions in inches.

Combustion chamber dimensions for LN60 and LN80 burners

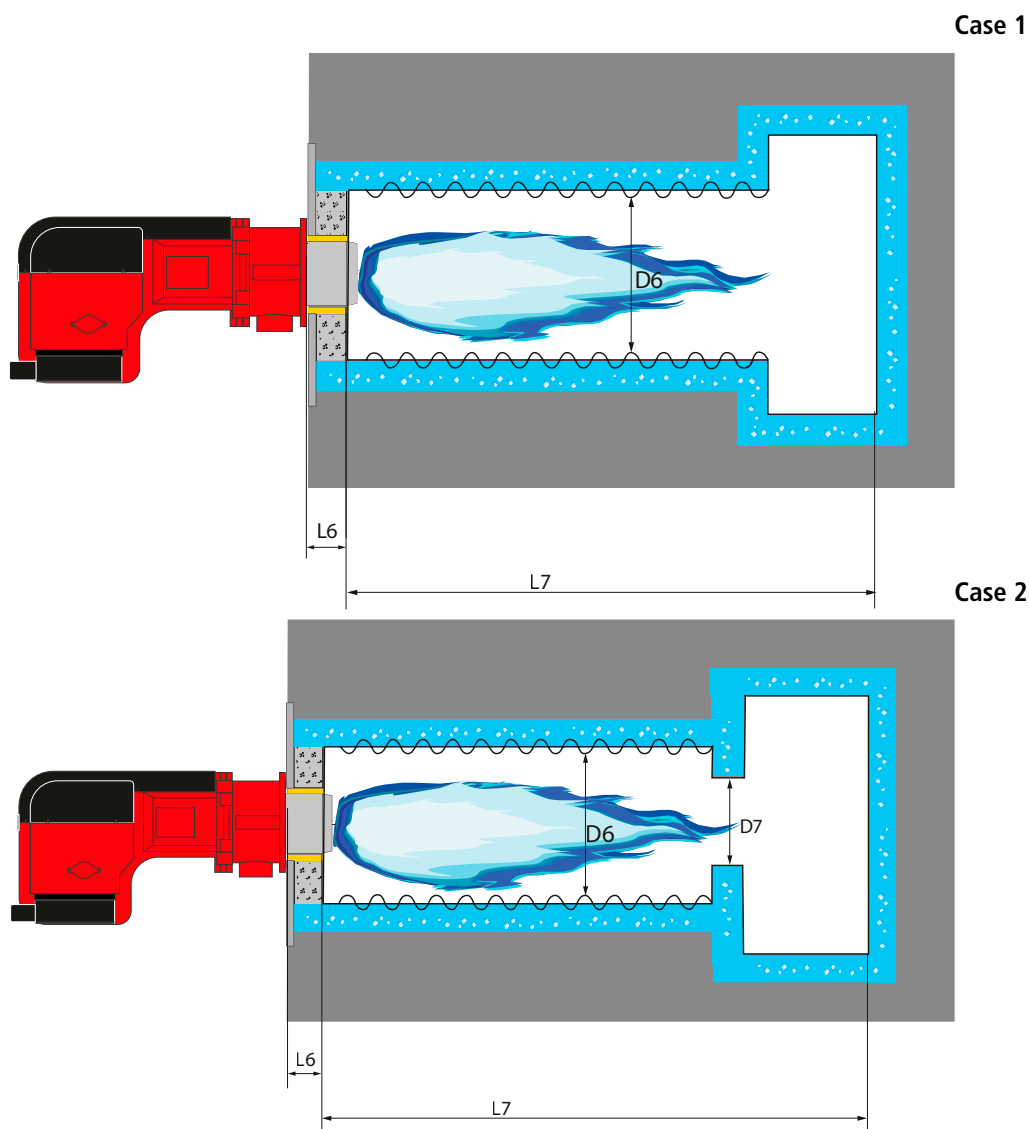

Minimum dimensions to meet 40 ppm emissions (LN80) and 30 ppm emissions (LN60).

BURNER SERIE	GP-600 M LN60	GP-700 M-III LN60	GP/ GKP- 140 M LN80	GP/ GKP- 250 M LN80	GP-280 M LN80	GP/ GKP- 320 M LN80	GP/ GKP- 350 M LN80	GP-450 M LN80	GP/GKP- 600 M LN80	GP/GKP- 700 M-II LN80	GP-700 M-III LN80	GP-1000 M LN80
D6 minimum *	43.1	46.7	26.7	29.4	31.4	34.9	37.3	38.4	45.1	47.1	49.4	53.7
D6 minimum **	45.1	48.6	28.2	31.4	33.3	36.9	39.2	40.8	47.8	49.8	52.5	57.3
L7 minimum ***	180.4	196.1	98.0	113.7	125.5	137.3	149.0	176.5	196.1	203.9	215.7	231.4

Dimensions in inches.

D_7 minimum $\geq D_6 * 0.7$

L_6 is an overall boiler front wall thickness, including refractory, steel front wall and a possible burner mounting plate.

* For hot water boiler (medium temperature max. +266 °F).

** For steam boiler (medium temperature max +410 °F).



*** May require longer furnace, if diameter is very wide.

Fuels: Natural gas

Accessories

FGR - Butterfly valve dimension

FGR max. temperature 482 °F

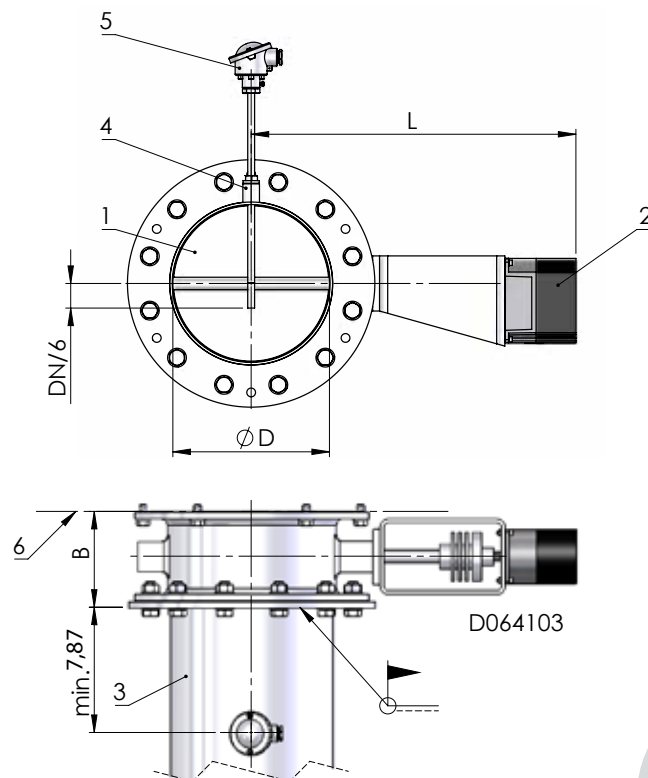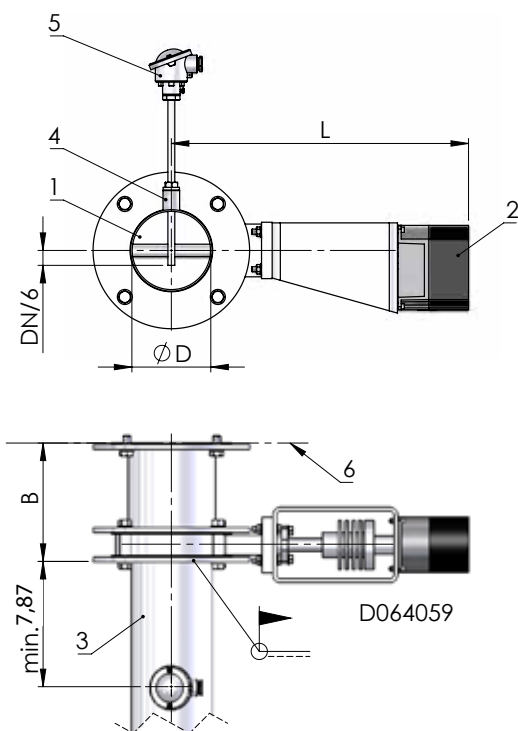

1. Butterfly valve FGR
2. Servomotor
3. FGR pipe, not included in the delivery
4. Sleeve 1/2", not included in the delivery
5. Temperature sensor
6. Burner

1. Butterfly valve FGR
2. Servomotor
3. FGR pipe, not included in the delivery
4. Sleeve 1/2", not included in the delivery
5. Temperature sensor
6. Burner

Burner	ØD	L	B
130...150	DN125 (NPS 5)	18.7	7.5
250...280	DN150 (NPS 6)	19.3	7.5
320...600	DN200 (NPS 8)	20.9	4.9

Burner	ØD	L	B
700	DN250 (NPS 10)	20.5	6.1
1000	DN300 (NPS 12)	21.9	7.2
1200	DN350 (NPS 14)	23.0	7.2

Dimensions in inches.


Accessories WDX00

Propane Adders
Propane (LPG BAND) 130...150, 250...280 SIZES
Methane manifold drilling, composition to be check with Oilon sales
Major Upgrade Options
GP/GKP LMV 52 UPGRADE (O2 Trim, VFD, Efficiency Calculation Capabilities)
Double Gas Train Cabinet Option (Enables Two Gas Train Use)
O2 Trim Kit (Requires LMV 52 UPGRADE Above) O2 electronic, UL 110V 1(4) Electronics
O2 Trim Kit (Requires LMV 52 UPGRADE Above), flue gas collector 2(4)
O2 Trim Kit (Requires LMV 52 UPGRADE Above) FLUE GAS COLLECTOR For big stacks 1 1/2ft -2ft length 2(4)
O2 Trim Kit (Requires LMV 52 UPGRADE Above), O2 sensor 3(4)
O2 Trim Kit (Requires LMV 52 UPGRADE) Additional Canbus Cable (35ft) 4(4)
GAS Flow Meter (Requires LMV 52 UPGRADE Above)
LMV BACnet Protocol Converter Installed in LMV Cabinet TS-PX2-X
Oil pilot line for GKP-130.....1200M burners, complete installed on burner. Standard burner uses NG/LPG as ignition fuel for both fuels.
Touchscreens
6" Touchscreen (Mounted On Our Remote Panel) TS-6XXS-XXX
10" Touchscreen (Mounted on our Remote panel) TS-0XXS-XXX
12" Touchscreen (Mounted on our Remote panel) TS-2XXS-XXX
PLC with 6 inch Touchscreen installed into NEMA12 cabinet TS-6X5S-2XX
PLC with 10 inch Touchscreen inst. into NEMA12 separate cabinet TS-0X5S-2XX
TS-5X-KT MODBUS communication kit between LMV5 and master panel
TS-PX5-X (Special) PROFIBUS CONVERTER
Power Breaker With Fuse
SAFETY SWITCH 600V 60A (Loose supply)
TUBE FUSE 600VAC, 3 Pcs. Needed (Loose supply)
Control Voltage Back Up
Control Voltage Back Up & Cleaning (UPS, AB 1609-B600N)

Gas Train Option
1 1/2", 2", 2.5", 3", 4", 6" Diaphragm Pressure regulator to meet CSA 149.3 (Dungs, Maxitrol)
- 1/4" NPT ball valve Manifold Pressure Kit 1 of 3 (CSA149.3)
- Pressure gauge Manifold Pressure Kit 2 of 3 (CSA149.3)
- 1/4" x 3" Nipple Manifold Pressure Kit 3 of 3 (CSA149.3)
1 1/4" Apollo Manual Closing Valve UL
1 1/2" Apollo Manual Closing Valve UL
2" Apollo Manual Closing Valve UL
2.5" Apollo Manual Closing Valve UL
3" Apollo Manual Closing Valve UL
4" ANSI FLANGE Apollo Manual Closing Valve UL
6" ANSI FLANGE Apollo Manual Closing Valve UL
1 1/2" CSA Lubricated Plug Valve 1 of 2
2" CSA Lubricated Plug Valve 1 of 2
Handle for CSA Lubricated Plug Valves 1-1/2" and 2" 2 of 2
2.5" CSA Lubricated Plug Valve 1 of 2
3" CSA Lubricated Plug Valve 1 of 2
Handle for CSA Lubricated Plug Valves 2.5" and 3" 2 of 2
4" CSA Lubricated Plug Valve
3 Way Valve for NG/LPG Pilot Operation
2", 2.5", 3", 4", 6" VGD Siemens double body NPT, 2-5PSI, 110V, complete with pressure switches, left handed, one manual closing included
2" VRD Siemens Bio gas double body NPT, 2-5PSI, 110V, complete with pressure switches, left handed
2.5" VRD Siemens Bio gas double body NPT, 2-5PSI, 110V, complete with pressure switches, RIGHT handed
3" VRD Siemens Bio gas double body NPT, 2-5PSI, 110V, complete with pressure switches, left handed
4" VRD Siemens Bio gas double body NPT, 2-5PSI, 110V, complete with pressure switches, left handed
"VA45.2-NF-200 2" "LMV servomotor with flow control valve for double gas application"
"VA45.2-NF-250 2.5" "LMV servomotor with flow control valve for double gas application"
"VA45.2-NF-300 3" "LMV servomotor with flow control valve for double gas application"
"VA45.2-NF-300 4" "LMV servomotor with flow control valve for double gas application"
1 1/2", 2", 2 1/2", 3" gas strainer, cast iron

Temperature & Pressure Sensors	
Temp. Sen. Flue gas	PT1000 , 1/2" NPT, no well , QAM P210
Temp. Sen. Air temp, High temp	1200C, PT1000 , 1/2" NPT, no well
Temp. Sen. Ambiental	NI1000, Cabinet Mounted, LMV, QAC22
Temp. Sen. Water	PT1000 ,immersion type, 1/2" NPT, 4" well, LMV
Temp. Sen. Water	PT1000 ,immersion type, 1/2" NPT, 6" well, LMV
Pres. Sen.	0 - 15, 0 - 150, 0 - 300 PSI 4-20mA, 1/4" NPT
Draft control options	
P/N C07720C0-4121-001	Enclosed surface mount Draft Controller, Modulating, sequencing, adjustable start, post purge & full open pre-purge capability. For gas/oil, negative pressure, unit comes with an internal low draft safety switch. No flue gas monitoring. 1(4)
P/N 31598	Siemens LMV 51/52 Relay interface kit, 2 pcs DPDT relay with 120 VAC coil, octal socket & surge suppressor. For use with 7720 unit 2(4)
P/N 9141-0101-A-8	Linear Actuator, 30 second, 6 inch stroke, with adjustable start. 3(4)
P/N 32020	Linkage kit (1 damper lever arm, 2 clevises for use with 9141 unit.) 4(4)
TS-DPA-030D,	DP pressure transducer with display, -3.00 to 3.00, needs also Siemens boiler touchscreen kit 1(4)
1910-5,	Differential Pressure Switch, 1.4-5.5" WC, needs also Siemens boiler touchscreen kit 2(4)
SQM56.564R1A3,	Damper Motor needs also Siemens boiler touchscreen kit 3 (4)
CHE6SCA-E8RSA,	425 deg F, 3/8" SQ to 1/2" round set screw, 400 in-lb needs also Siemens boiler touchscreen kit 4(4)
Various Options	
Quick Connectors Military Style (Single Fuel) GP/GKP/KP Models	
NEMA 4X Stainless steel cabinet upgrade including NEMA4 dust cover	
NEMA 4 Enclosure Upgrade (Including NEMA 4 Dust cover on AZL HMI)	
Day/Night Switch	
120VAC UPS, uninterruptible power supply installed in cabinet, battery back-up and electricity cleaning	
Alarm horn installed	
Control Panel Floor Rack to keep LMV panel	
Oilon-SCC FLMTR-0.75-6.0KIT NG flow meter kit with display	

Packing

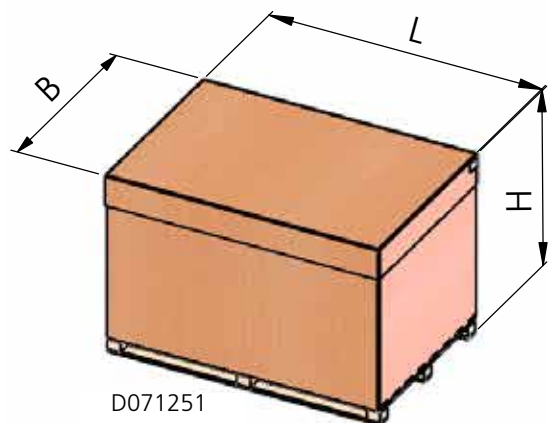


BURNER SERIE	Dimensions			Weight lb	Material standard
	L	B	H		
GP-350/450 M...	80.3	54.3	48.8	138.9	Board
GP-600 M...	80.3	54.3	48.8	138.9	Board
GP-700 M..700 M-III...	88.2	64.2	48.8	160.9	Board
GP-1000/1200 M...	85.8	73.6	72.0	529.1	Plywood
GKP-350/450 M...	64.6	48.0	34.6	121.3	Board
GKP-500/600 M...	80.3	54.3	48.8	138.9	Board
GKP-700 M..700 M-III...	88.2	64.2	48.8	160.9	Board
GKP-1000/1200 M...	85.8	73.6	72.0	529.1	Plywood
KP-350/450 M...	80.3	54.3	48.8	138.9	Board

Dimensions in inches.

General for all burners

Flame dimensions for combustion head

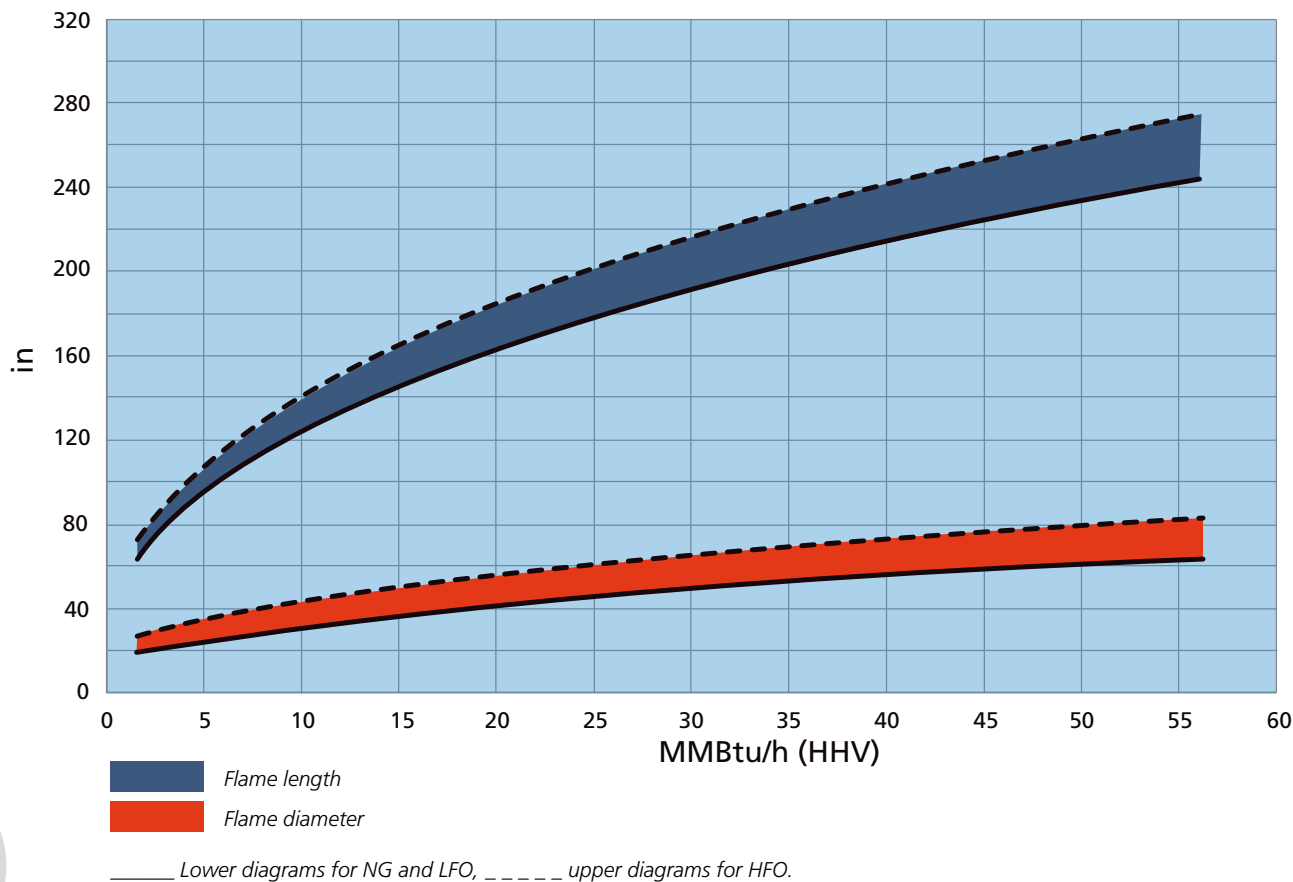

The diagram shows the flame dimension of an Oilon burner in a regular firetube boiler.


Gas valves

BURNER SERIES	Min. inlet gas pressure psi"	Max. inlet gas pressure psi"	Gas valve	
			Type	Size inch
GP/GKP-50/90 M/MH	0.73	7.25	VGG	2"
GP/GKP-140...280 M/MH	0.73	7.25	VDG	2" - 4"
GP/GKP-350/450 M	1.45	7.25	VDG	2" - 4"
GP/GKP-600...700 M-III	1.45	7.25	VDG	2.5" - 6"
GP/GKP-1000/1200 M	2.18	7.25	VDG	4" - 6"
GP/GKP-140...280 M LN80	0.73	7.25	VDG	2" - 6"
GP/GKP-320...450 M LN80	1.45	7.25	VDG	2" - 6"
GP-600 M...700 M-III LN80	1.45	7.25	VDG	2.5" - 6"
GP-1000 LN80	2.18	7.25	VDG	4" - 6"
GP-600 M/700 M-III LN60	7.25	8.70	VDG	2.5" - 6"
GP-130/250 M LN30	1.45	7.25	VDG	2" - 3"

Accessories

Turbo combustion head for flame shaping

Example

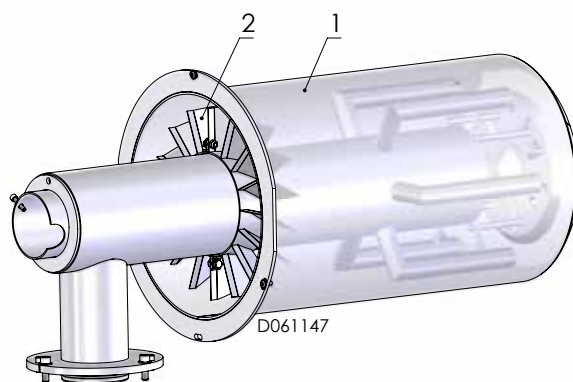


1. Combustion head
2. Turbo

Silencer

Air intake silencer

Construction

The silencer is made of steel plate lined with fire-proof dampening wool. The silencer is connected to the burner's suction side via a screw connection. The silencer reduces the high-pitched sound produced by the air flow.

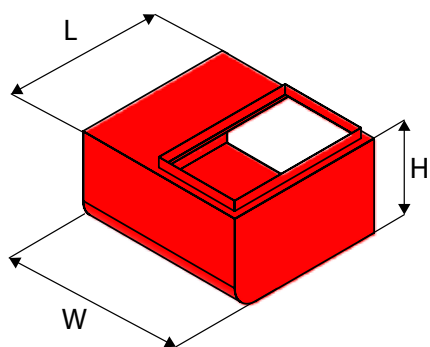


Burner	W	L	H
90	12.6	12.6	6.3
140/150	16.8	15.4	9.1
250/280	16.8	15.4	9.1
700	22.0	28.4	13.0
1000/1200	20.7	31.5	26.2

Hood silencer



Construction

The silencer is made of steel plate lined with fireproof dampening wool. This wheel-equipped silencer isolates the burner from four sides. Silencer reduces the sounds produced when the burner operates. Delivered in plate parts.

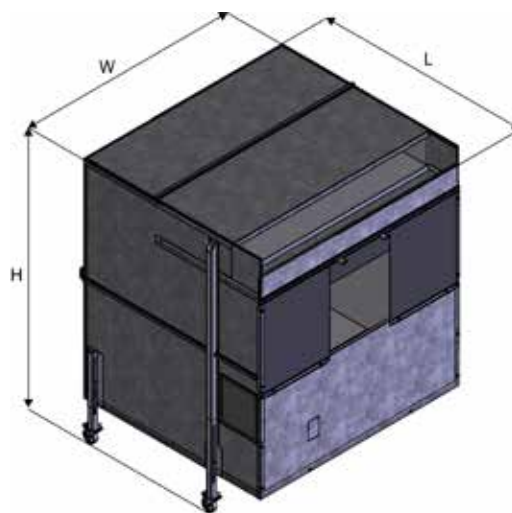

Burner	W	L	H
140...280	52.4	60.0	56.1
300...700	65.7	64.8	75.2
1000/1200	87.0	77.6	97.8

Booster unit

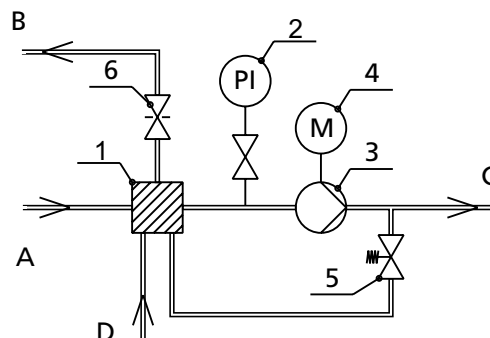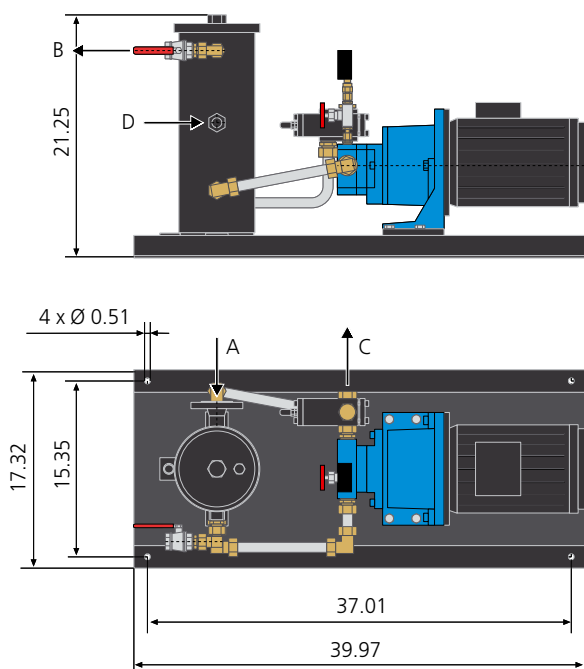

- 1 Oil filter
- 2 Pressure gauge
- 3 Oil pump
- 4 Electric motor
- 5 Pressure regulating valve
- 6 Drilled ball valve

- A. Inlet to the booster unit NTP1, 400...2000 "WC 0.006...0.0019 in²/s
- B. Return from the booster unit R1/2"
- C. Inlet to the burner 0.8662 (Ø 22 mm)
- D. Return from the burner 0.8662 (Ø 22 mm)


Dimensions in inches.

The booster unit is used for pumping light fuel oil with viscosity of 0.006...0.019 in²/s +20 °F. The oil coming to the booster unit must be filtered, max. filtration degree is 150 µm.

Booster unit	Motor 400 V/50 Hz		Oil pump Type	Pump output 0.019 in ² /s 363 psi lb/h
	hp	r/min		
PKYK 2	5.5	3000	T4 C	4365
PKYK 3	5.5	3000	T5 C	6393


The output has been calculated using a density of 53 lb/ft³ for the light fuel oil.

Diagram 1
Selection of the booster unit for light fuel oil

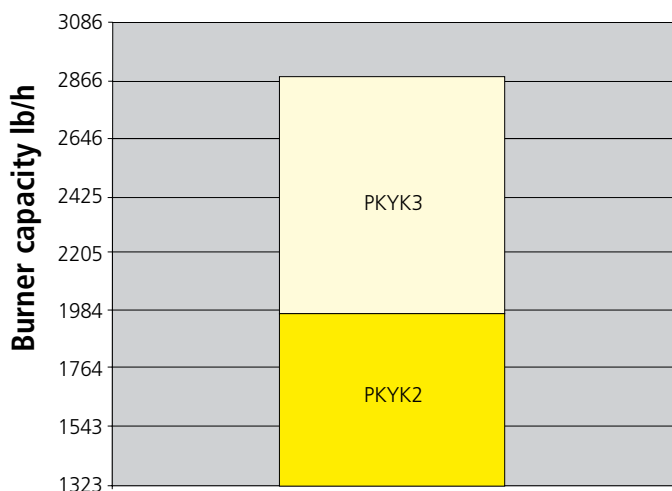

Gas pressure control assembly

Example

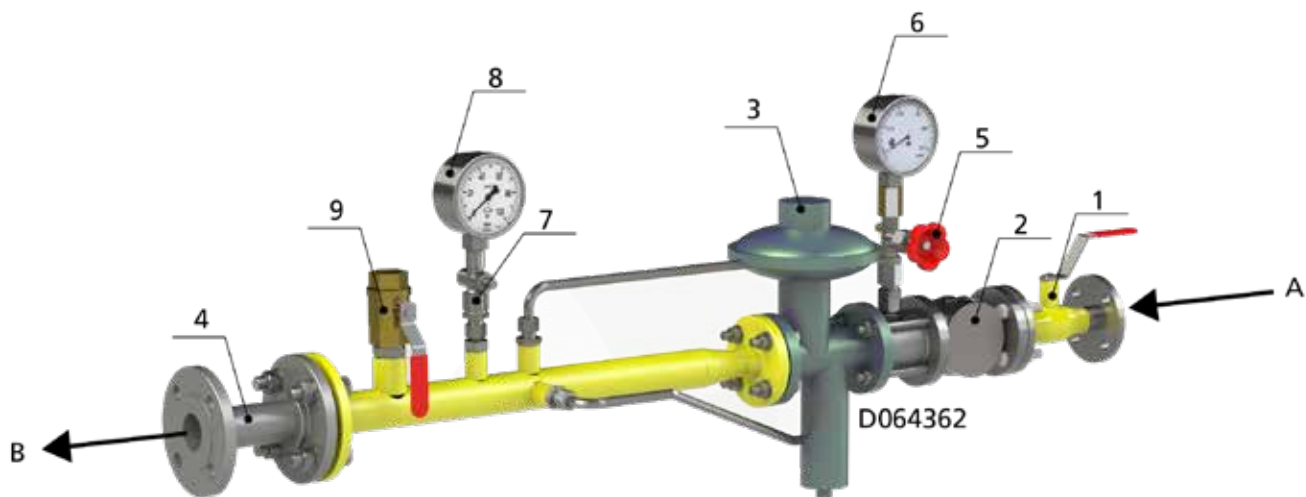

1. Ball valve
2. Gas filter
3. Pressure regulator with safety shut-off valve and safety relief valve
4. Bellows compensator/gas hose
5. Pressure gauge valve
6. Pressure gauge, high pressure
7. Pressure gauge valve
8. Pressure gauge, low pressure
9. Ball valve, blow-off

- A Gas inlet
B Gas to burner

Oilon customer service and webshop



Commissioning and maintenance services

We have extensive expertise in burner technology and processes. We offer reliable commissioning, maintenance, and training services for all needs. With the help of our services, you can design a system that will meet environmental legislation and operate at optimal efficiency.

Technical support

The technical support service is for retailers, maintenance companies, and end clients. You can contact us with any questions about technical problems or warranty issues. We also design and implement updates for your burner systems with full expertise.

Spare part services

Our spare part services provide our clients with support throughout the equipment's lifecycle.


- spare part recommendations for both new and old systems
- spare parts for servicing and maintenance

Spare parts store

Maintenance companies and retailers can easily obtain spare parts directly from our online store. Contact our spare parts sales service and we will provide you with a password to access our spare parts store.

Please visit our spare parts store

<http://webshop.oilon.com>

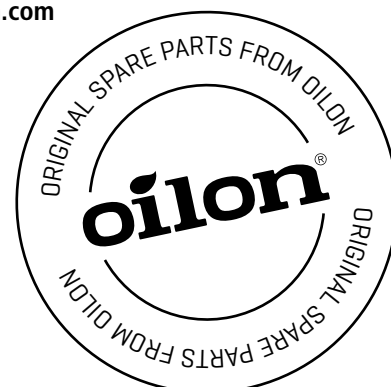

Modern training facilities



We provide high level training on our products, and the goal of our product training is to improve the professional skills of installation and maintenance companies.

On theory lessons we provide important facts on the burner's operating environment and components. Practical exercises include burner adjustment and fault diagnostics, among many other things. We also underline the importance of low emission values for the environment.



Our Sales and Service Network



During our extensive years of operation, we have evolved from a small traditional burner manufacturer into an internationally well-known energy and environmental technology company.

Our strong commitment to research and development has resulted in growing staff know-how and a rapid increase in the product range.

We have production facilities and sales offices in Finland, USA, Russia, Brazil and China and resellers all over the world.